

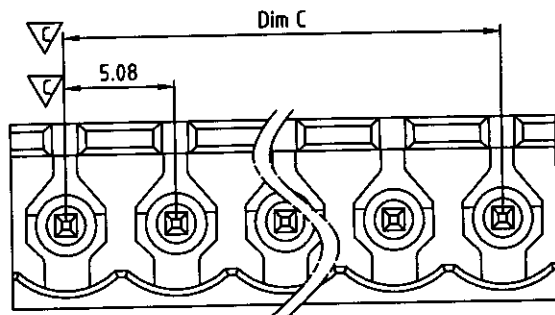
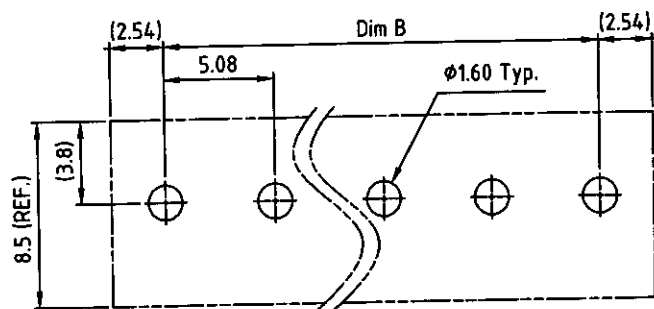


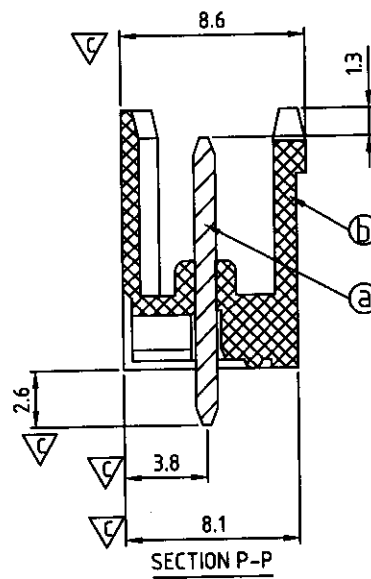

N= NUMBER OF POLES

Dim A	$N \times 5.08$
Dim B	$(N-1) \times 5.08$
Dim C	$(N-1) \times 5.08$

Poles	Tolerance
2P-3P	± 0.15
4P-8P	± 0.20
9P-12P	± 0.25

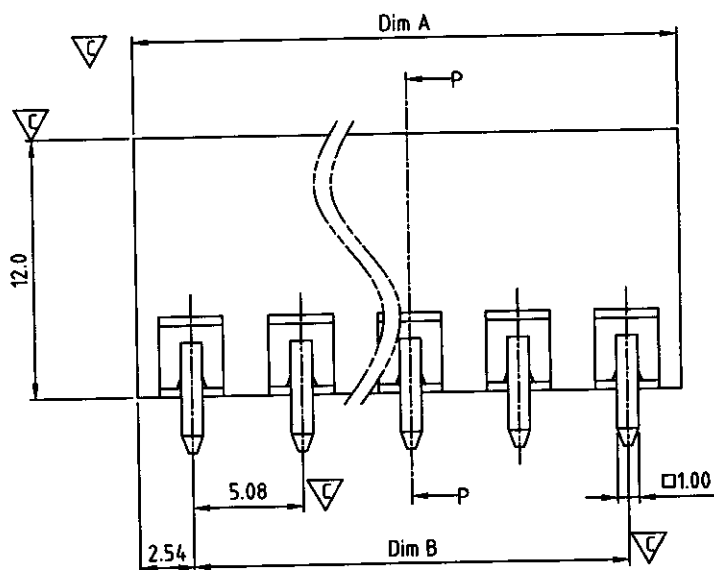

RECOMMENDED PCB LAYOUT

SIGN	DATE	DESCRIPTION	APPROVER

THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!

Material:

- Item ③ Male contact pin: Copper Tin plated
- Item ⑤ Terminal(housing): High temp. polyamide (UL94V-0)

Electrical:

cULus


- Voltage rating: 300V
- Current rating: 20A
- Withstanding Voltage: 1.6 KV
- Operating temperature: -45°C to $+65^{\circ}\text{C}$
- Soldering temperature: $280^{\circ}\text{C}/10$ Sec
- Safety Approval:
- Critical dimension:

OQ xx 5 A x 0 xxxx G

No. OF POLES
02 : 2 POLES
03 : 3 POLES
:
:
12 : 12 POLES

Color
0 Black (RAL9005)

G RoHS compliant
(lead<4%)
In copper Alloy
0000: "@" Logo (Standard)
000A: "ANYTEK" Mark
Any special item by
customer request.
please contact sales
department.



ANYTEK

CUSTOMER COPY

ALL RIGHTS RESERVED. REPRODUCTION OR ISSUE TO THIRD PARTIES IN ANY FORM WHATEVER IS NOT PERMITTED WITHOUT WRITTEN AUTHORITY FROM THE PROPRIETOR. PROPERTY OF ANYTEK TECHNOLOGY CO., LTD

TITLE		OQ 5.08mm 180° Series 2P-12P Open THR TYPE					
PART NO.		OQxx5A000000G/AG			DWG NO.	80Q0102	
APPROVED	CHECKED	DESIGNED	DRAWN	CUST NO.		Tolerance	
		Chen Bo	Chen Bo			UNIT: mm	X. ±0.50
		10/17 13	09/18 13			SCALE: NONE	X.X ±0.30
				SHEET: 01/01	REV: B	X.XX ±0.10	
							X° ±1°