


**SERIES:** SWI3-N | **DESCRIPTION:** AC-DC POWER SUPPLY

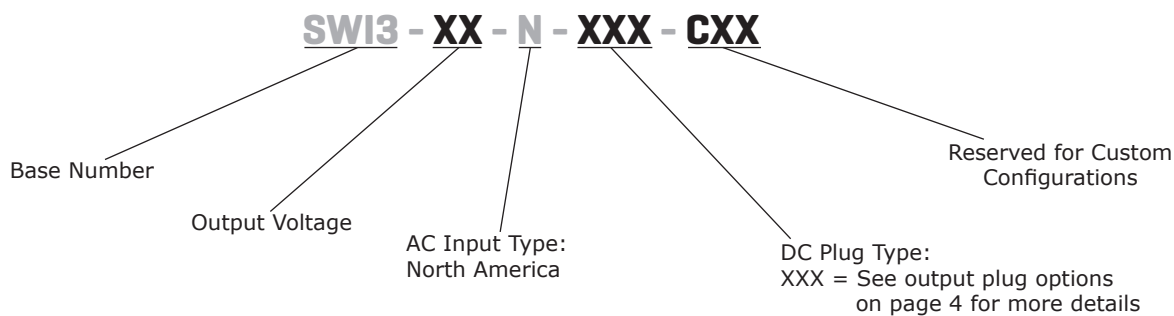
**FEATURES**

- up to 3 W continuous power
- IEC 62368 compliant
- DoE Level VI efficiency
- universal input voltage range
- ultra-compact case
- no load power consumption < 0.075 W
- over voltage, over current, and short circuit protections
- UL/cUL, PSE, FCC safety approvals
- Class II construction



| MODEL    | output<br>voltage<br>(Vdc) | output<br>current<br>max<br>(A) | output<br>power<br>max<br>(W) | ripple<br>and noise <sup>1</sup><br>max<br>(mVp-p) | efficiency<br>level |
|----------|----------------------------|---------------------------------|-------------------------------|----------------------------------------------------|---------------------|
| SWI3-5-N | 5                          | 0.6                             | 3                             | 150                                                | VI                  |

Notes: 1. At full load, nominal AC input voltage, 25°C, 20 MHz bandwidth oscilloscope, output terminated with 0.1  $\mu$ F and 10  $\mu$ F capacitors to ground.

**PART NUMBER KEY**


## INPUT

| parameter                 | conditions/description               | min | typ | max   | units |
|---------------------------|--------------------------------------|-----|-----|-------|-------|
| voltage                   |                                      | 90  |     | 264   | Vac   |
| frequency                 |                                      | 47  |     | 63    | Hz    |
| current                   | at nominal input voltage             |     |     | 0.2   | A     |
| leakage current           | at nominal input voltage & frequency |     |     | 0.02  | mA    |
| no load power consumption | at 115/230 Vac, 60/50 Hz             |     |     | 0.075 | W     |

## OUTPUT

| parameter       | conditions/description | min | typ | max | units |
|-----------------|------------------------|-----|-----|-----|-------|
| line regulation |                        | 4.9 |     | 5.4 | Vdc   |
| load regulation |                        | 4.9 |     | 5.4 | Vdc   |
| start-up time   | at 115 Vac             |     |     | 3   | s     |

## PROTECTIONS

| parameter                | conditions/description | min | typ | max | units |
|--------------------------|------------------------|-----|-----|-----|-------|
| over current protection  | auto recovery          |     |     | 1   | A     |
| short circuit protection |                        |     |     |     |       |

## SAFETY & COMPLIANCE

| parameter         | conditions/description                                                 | min    | typ            | max | units      |
|-------------------|------------------------------------------------------------------------|--------|----------------|-----|------------|
| isolation voltage | input to output at 10 mA for 1 minute                                  |        | 3,000<br>4,242 |     | Vac<br>Vdc |
| safety approvals  | UL/cUL (UL 60950-1, UL 62368-1), PSE                                   |        |                |     |            |
| EMI/EMC           | FCC Part 15 Subpart B Class B                                          |        |                |     |            |
| MTBF              | as per Telcordia SR-332 (Issue 2), at 115/230 Vac, full load, 0°C~40°C | 50,000 |                |     | hours      |
| RoHS              | 2011/65/EU                                                             |        |                |     |            |

## ENVIRONMENTAL

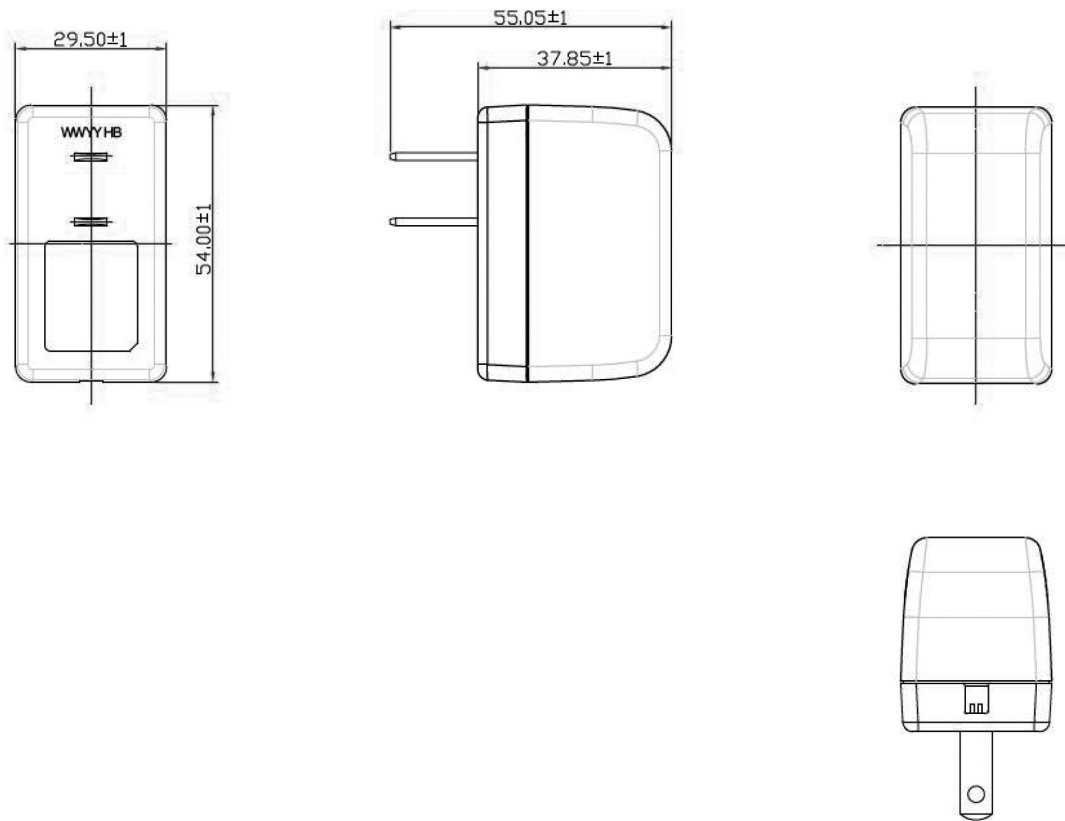
| parameter             | conditions/description | min | typ | max | units |
|-----------------------|------------------------|-----|-----|-----|-------|
| operating temperature |                        | 0   |     | 40  | °C    |
| storage temperature   |                        | -20 |     | 60  | °C    |
| operating humidity    | non-condensing         | 20  |     | 85  | %     |
| storage humidity      | non-condensing         | 5   |     | 95  | %     |

## MECHANICAL

| parameter  | conditions/description | min | typ | max | units |
|------------|------------------------|-----|-----|-----|-------|
| dimensions | 54.00 x 29.50 x 37.85  |     |     |     | mm    |
| inlet plug | North America, 2-pin   |     |     |     |       |
| weight     |                        |     | 64  |     | g     |

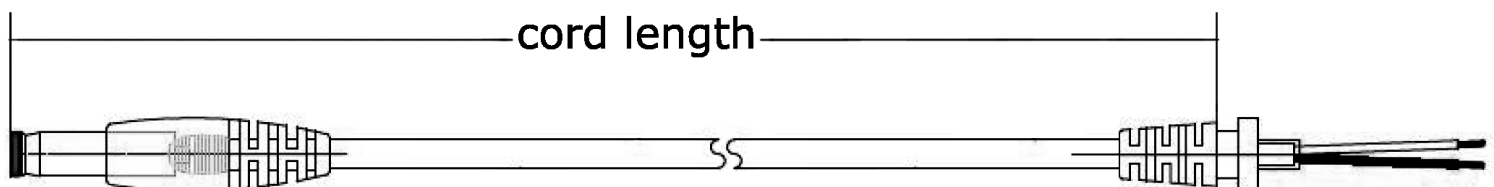
## MECHANICAL DRAWING

units: mm



## DC CORD

units: mm

**Table 1**

| MODEL NO. | CABLE          | CORD LENGTH  |
|-----------|----------------|--------------|
| SWI3-5-N  | UL1185, 24 AWG | 1,500 mm ±50 |



## REVISION HISTORY

| rev. | description     | date       |
|------|-----------------|------------|
| 1.0  | initial release | 09/14/2017 |

The revision history provided is for informational purposes only and is believed to be accurate.

**CUI INC<sup>®</sup>**

**Headquarters**  
20050 SW 112th Ave.  
Tualatin, OR 97062  
**800.275.4899**

Fax 503.612.2383  
**cui.com**  
techsupport@cui.com

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference, and
- (2) this device must accept any interference received, including interference that may cause undesired operation.

CUI offers a one (1) year limited warranty. Complete warranty information is listed on our website.

CUI reserves the right to make changes to the product at any time without notice. Information provided by CUI is believed to be accurate and reliable. However, no responsibility is assumed by CUI for its use, nor for any infringements of patents or other rights of third parties which may result from its use.

CUI products are not authorized or warranted for use as critical components in equipment that requires an extremely high level of reliability. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.