TABLE 1									
MODEL NUMBER	DESCRIPTION	AWG SIZE	No. OF COND	COND STRAND	LENGTH	FIG	COLOR CODE		
65-TF224M	FLAT SILVER WIRE, 4C, 1000FT, NON-UL	28	4	7 X 36	1000FT	FIG 1	YELLOW, GREEN, RED, BLACK		
65-TF226M	FLAT SILVER WIRE, 6C, 1000FT, NON-UL	28	6	7 X 36	1000FT		WHITE, BLACK, RED, GREEN, YELLOW, BLUE		
65-TF228M	FLAT SILVER WIRE, 8C, 1000FT, NON-UL	28	8	7 X 36	1000FT		BLUE, ORANGE, BLACK, RED, GREEN, YELLOW, BROWN, WHITE		



FIG 1

FIG 2

DESCRIPTION: FLAT SILVER WIRE, XC, 1000FT, NON-UL

MODEL NUMBER: 65-TF22XM (SEE TABLE 1)

APPLICATION: FLAT SILVER SATIN CABLE TELEPHONE AND COMPUTER

CRIMP TOOL: N/A

IMPEDANCE: N/A

FREQUENCY RANGE: N/A

MATERIAL: CONDUCTOR COPPER CLAD AL


INSULATOR PP

JACKET PVC

RoHS COMPLIANCE: YES

TECHNICAL DETAIL: N/A

FIG 3

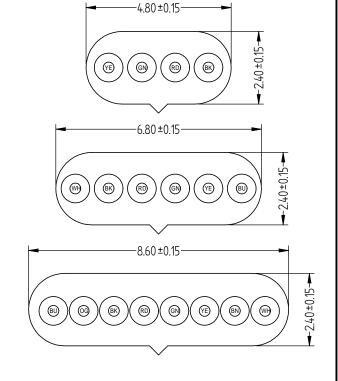

cinch	3RD ANGLE PROJECTION	AIM-Cambridge					
CONNECTIVITY SOLUTIONS a bel group This PROPRIETARY Document is	RoHS 2002/95/EC	Title: FLAT SILVER WIRE, XC, 1000FT, NON-UL					
property of Cinch Connectivity Solutions. It is confidential in nature, non-transferable, and issued with the clear		Model					
understanding that it is not traced or copied without permission and is returnable upon demand.	.XX ±.51 .XXX ±.127	65-TF22XM					
INTERPRET DRAWING IN ACCORDANCE WITH ASME Y14.5-2009.	ANGLES ±2°	Size	DO NOT SCALE DRAWING	Date: 5/4/2013	Sheet 1 of 1		