

NOTES:

1. ROHS COMPLIANT
2. MATERIAL:
PANEL CONNECTOR SOCKET - POLYPROPYLENE, UL RATING 94-HB
HEADER CONNECTOR - POLYESTER, UL RATING 94-V0
TERMINALS - PHOSPHOR BRONZE, TIN PLATED
WIRE - 24 AWG 1007/ 1569
3. MOUNTING: HOLE SIZE - 9/32" (7.14mm)
4. PANEL THICKNESS: .030" (.762mm) MIN - .250" (6.35mm) MAX
USE RNG 242 RETAINING RING WHEN ADDITIONAL SECURITY IS REQUIRED
5. LED LEAD LENGTH: 5mm FLANGLESS LED .250" (6.35mm)
6. U.S. & FOREIGN PATENT ISSUED AND PENDING

REVISIONS				
ECN #	REV	DESCRIPTION	DATE	INITIALS
	001	REVISED PER ECR 111009AZ01	11/26/10	KH

CABLE ORDERING CODE EXAMPLE:
CNX K E 4 1 12



TERMINATION *	
X =	STRIPPED END
E =	SINGLE ROW LOCKING HEADER
G =	SINGLE ROW PLAIN HEADER

WIRE SIZE *	
4	24 AWG

WIRE COLOR *	
1	WHITE - BLACK
2	RED - BLACK

WIRE LENGTH *	
04	4 INCHES (101.6mm)
06	6 INCHES (152.4mm)
08	8 INCHES (203.2mm)
12	12 INCHES (304.8mm)
18	18 INCHES (457.2mm)
24	24 INCHES (609.6mm)

* CALL FACTORY
FOR ADDITIONAL
OPTIONS

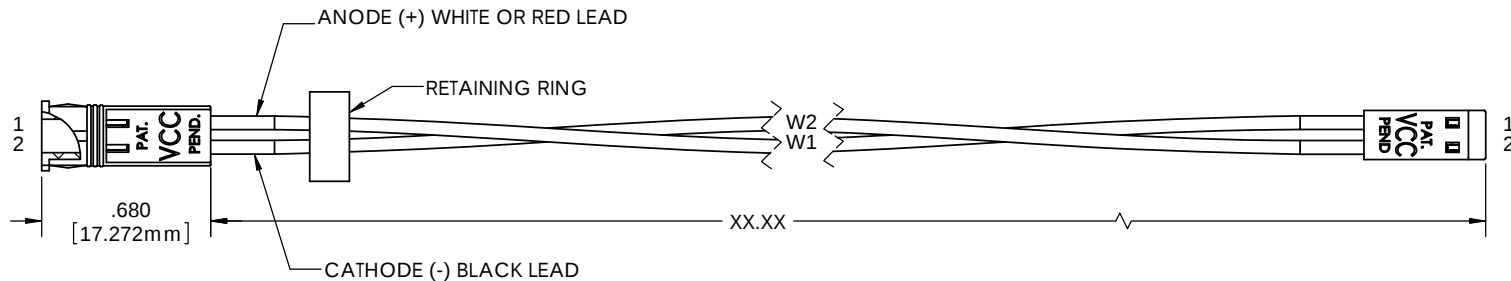

DIMENSION STYLE: INCHES / MM GENERAL TOLERANCES UNLESS OTHERWISE SPECIFIED: INCHES ±.500 MM ±12.7		MATERIAL SEE NOTES		 OPTOELECTRONICS 190 BOSSTICK BLVD, SUITE 101 SAN MARCOS, CA 92069 U.S.A PHONE: (760) 560-1300, FAX: (760) 560-1301 EMAIL: vccsales@vccite.com	
 THIRD ANGLE PROJECTION		FINISH SEE NOTES			
PROPRIETARY AND CONFIDENTIAL THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF VISUAL COMMUNICATIONS COMPANY, INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF VISUAL COMMUNICATIONS COMPANY, INC. IS PROHIBITED.				TITLE: CNX K CABLE ASSEMBLY	
				SIZE DWG. NO. REV	
DRAWN K.Howard 11/26/10				B CNX K ASSY 001	
CHECKED DPZ 11/29/10				SCALE: 1:1 SHEET 1 OF 1	
DO NOT SCALE DRAWING					