

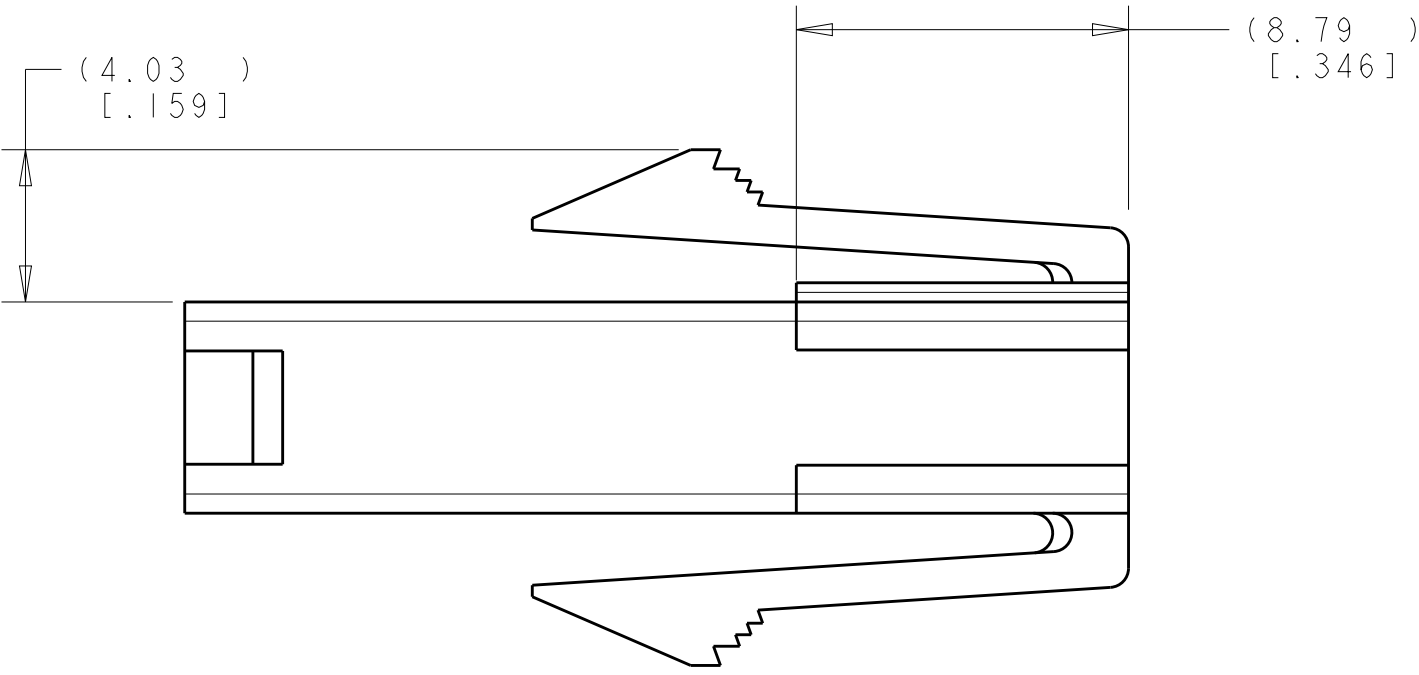
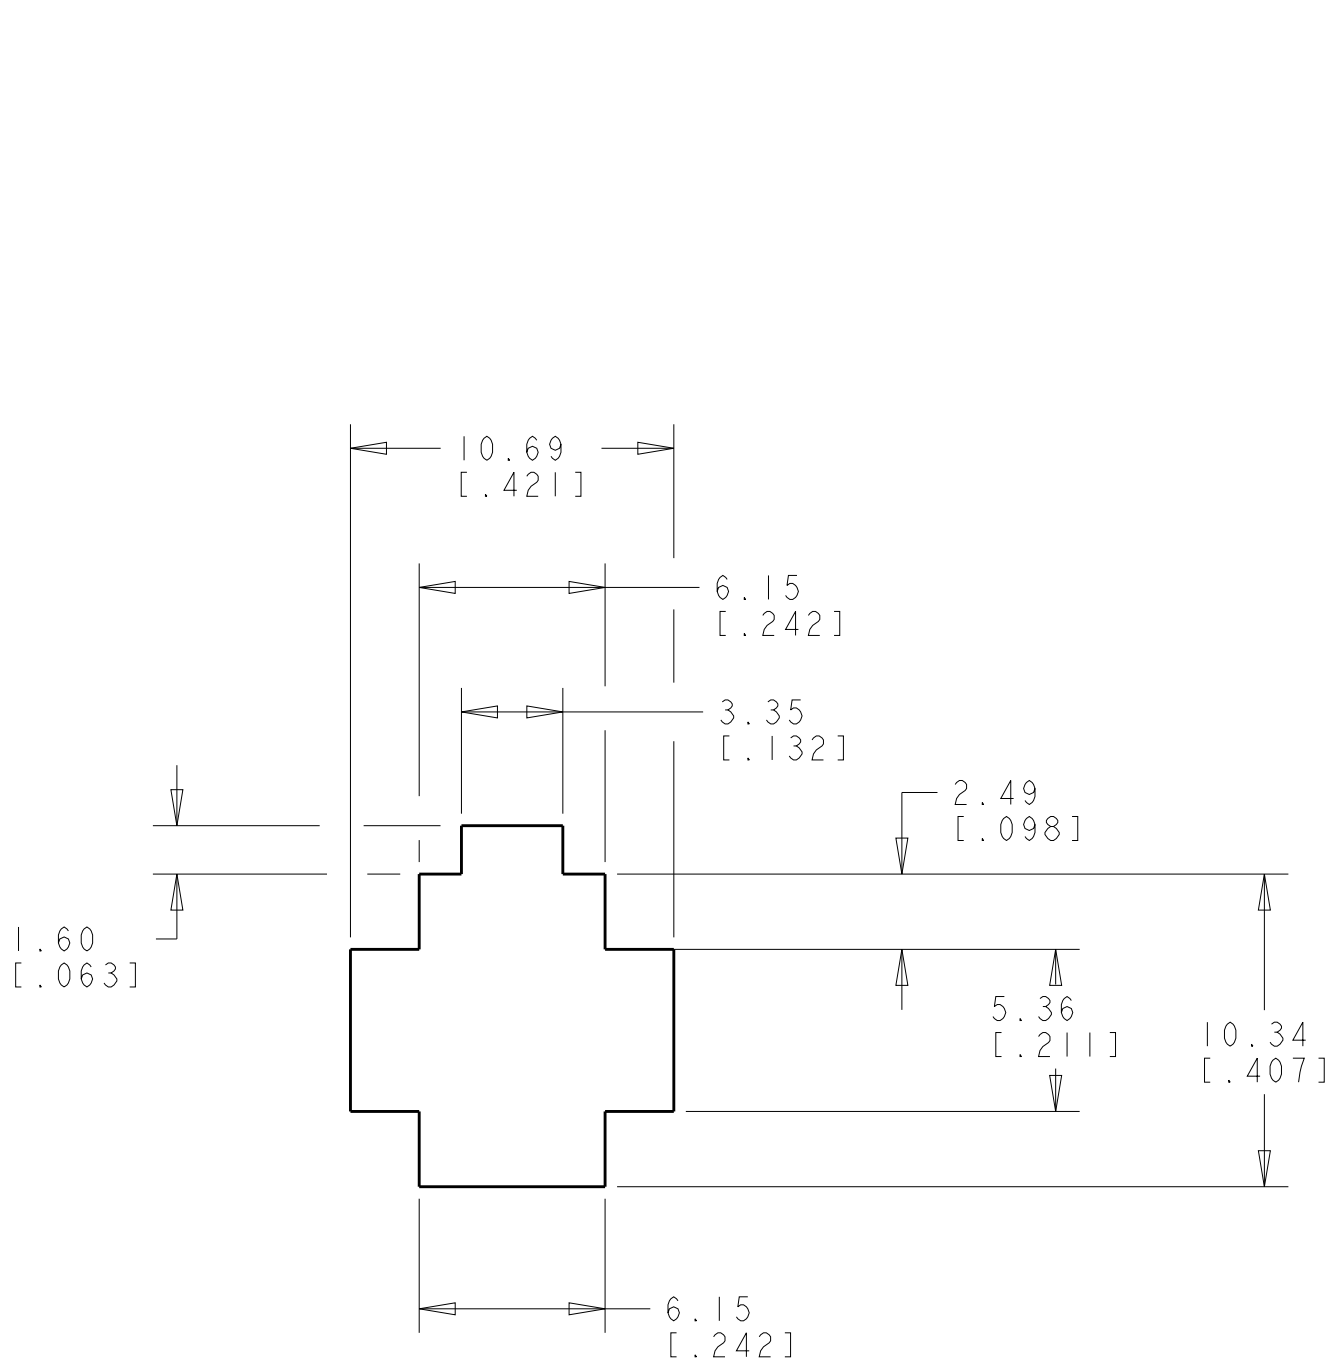
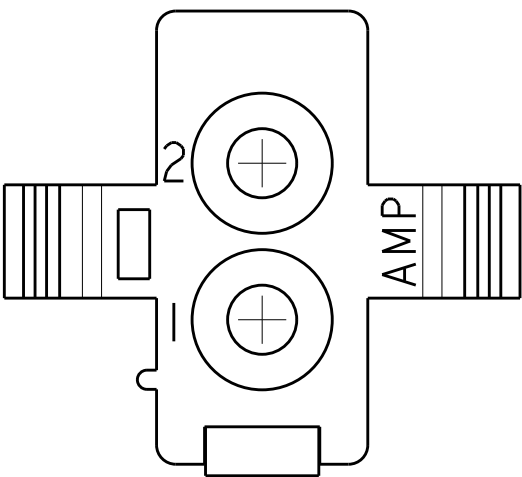
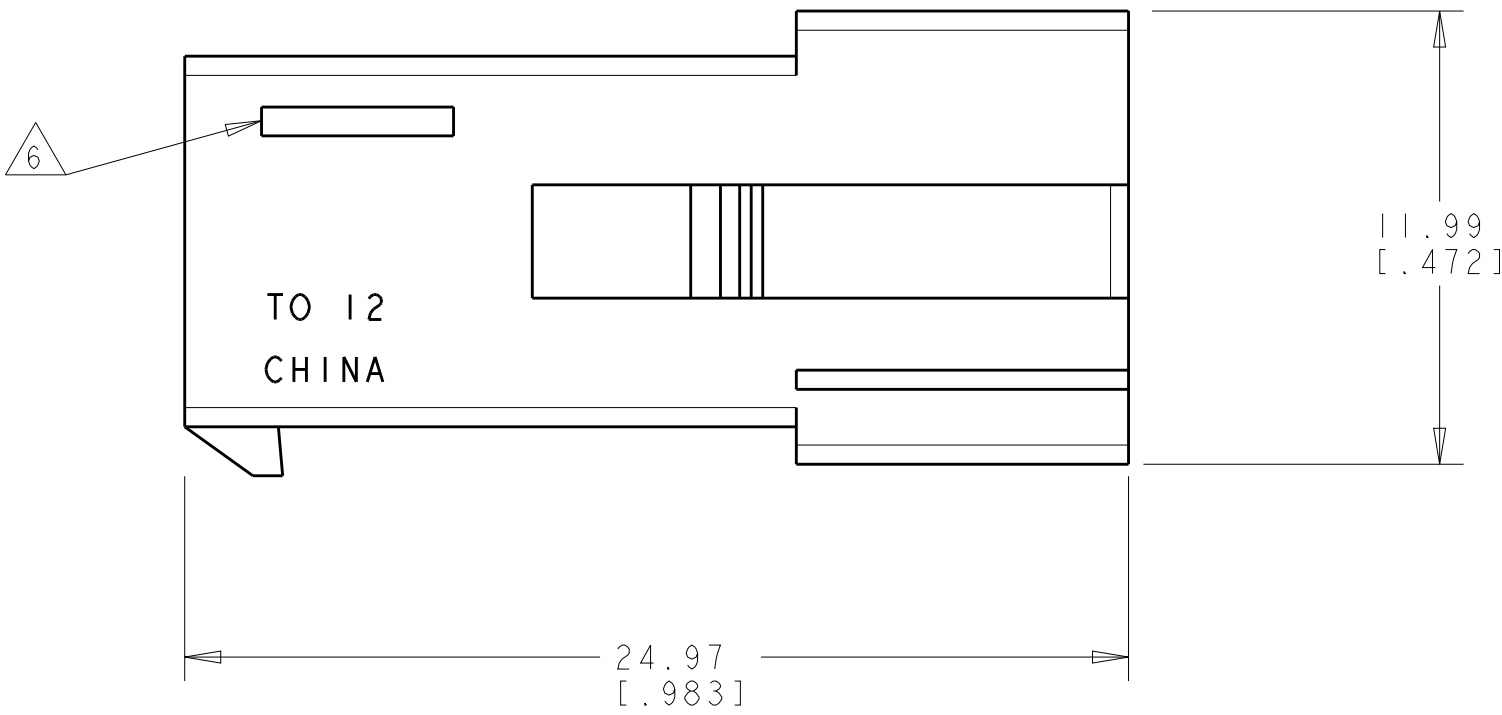


LOC		DIST		REVISIONS				
CM	00	P	LTR	DESCRIPTION	DATE	DWN	APVD	
		A3		ECR-15-006129	30APR2015	SC	DZ	

1. APPLICABLE CONTACT P/N: 170539, 170360, 170361, 170362.
2. MATING HOUSING P/N: 794894.
3. RECOMMENDED PANEL THICKNESS TO BE 0.8-2.0 [.031-.079].
4. HOUSING INSERTION INTO THE PANEL CUT OUT MUST BE IN THE SAME DIRECTION AS THE PUNCH.)
5. GWT 750° (WITH OUT FLAME) ACC. IEC 60335-1
6. MATERIAL DESIGNATION.

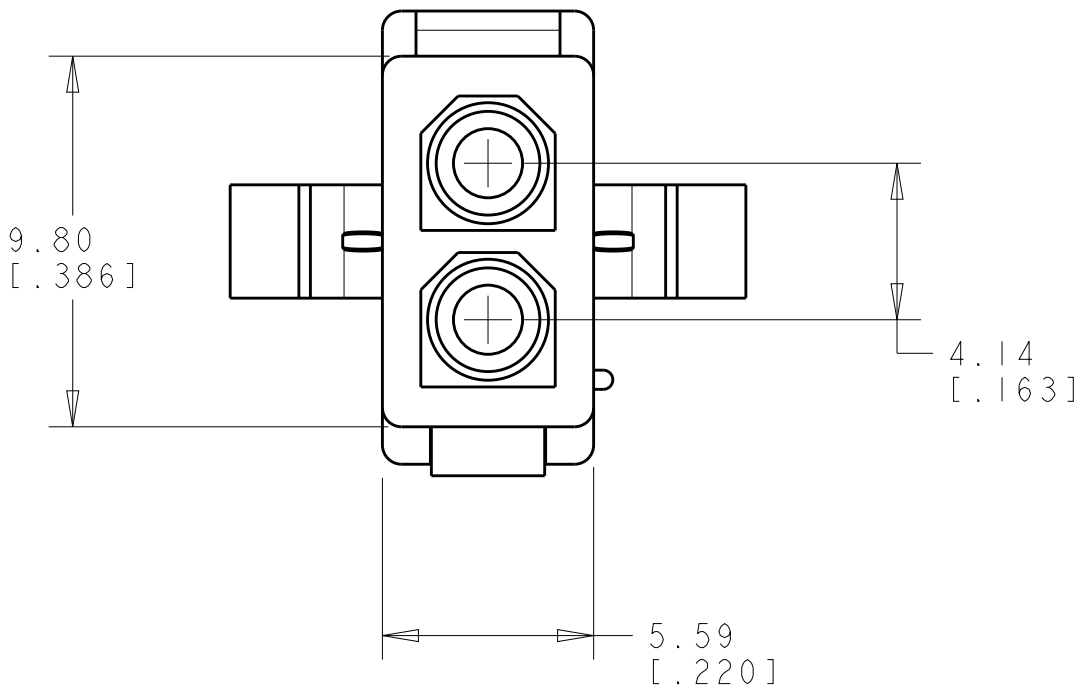

RECOMMENDED PANEL CUT OUT
SCALE 4:1

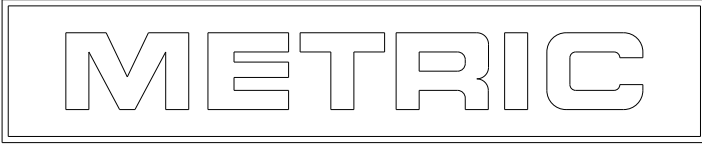

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN R. WHITAKER	29JAN2001	TE Connectivity	
DIMENSIONS: mm[INCHES]		CHK C. JONES	29JAN2001		
		APVD C. JONES	29JAN2001		
TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ±" 1 PLC ±" 2 PLC ±0.13 (.015) 3 PLC ±.005 4 PLC ±" ANGLES ±0°30' FINISH -		PRODUCT SPEC APPLICATION SPEC WEIGHT -			
MATERIAL		CUSTOMER DRAWING		SIZE A1	CAGE CODE DRAWING NO 794896
				SCALE 5:1	SHEET 1 OF 1
				REV A3	