

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number:

0442480006

Status:

Active

Overview:

Modular Plugs - Jacks

Description:

Modular Jack, Right Angle, Low Profile, Inverted, Lightpipes, 8/8, 4 Ports

Documents:

3D Model

Application Specification AS-43860-001 (PDF)

Drawing (PDF)

RoHS Certificate of Compliance (PDF)

Product Specification PS-43860-003 (PDF)

Agency Certification

CSA

LR19980

UL

E107635

General

Product Family

Modular Jacks/Plugs

Series

44248

Comments

Industry Compatible

Component Type

PCB Jack

Magnetic

No

Overview

Modular Plugs - Jacks

Performance Category

3

Power over Ethernet (PoE)

N/A

Product Name

RJ45

UPC

800753131057

Physical

Boot Color

N/A

Color - Resin

Black, Clear

Durability (mating cycles max)

500

Flammability

94V-0

Inverted / Top Latch

Yes

Jack Height

13.21mm

Lightpipes/LEDs

Lightpipes

Material - Metal

Phosphor Bronze

Material - Plating Mating

Gold

Material - Plating Termination

Tin

Material - Resin

Polycarbonate, Polyester

Orientation

Right Angle (Side Entry)

PCB Locator

Yes

PCB Retention

Yes

PCB Thickness - Recommended

1.57mm

Packaging Type

Tray

Panel Mount

With Flange

Pitch - Mating Interface

1.02mm

Pitch - Termination Interface

1.02mm

Plating min - Mating

1.270µm

Plating min - Termination

2.540µm

Ports

4

Positions / Loaded Contacts

8/8

Surface Mount Compatible (SMC)

No

Temperature Range - Operating

-40°C to +85°C

Termination Interface: Style

Through Hole


Waterproof / Dustproof

No

Wire/Cable Type

N/A

Electrical

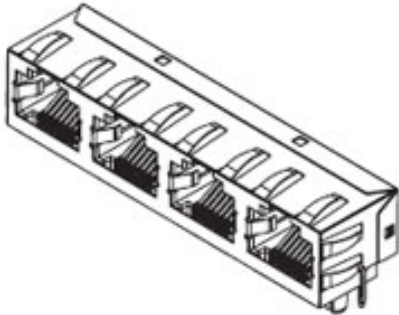

Series image - Reference only

EU ELV

Not Relevant

EU RoHS

Not Reviewed

REACH SVHC

Not Reviewed

Halogen-Free

Status

Not Reviewed

Need more information on product environmental compliance?

Email productcompliance@molex.com
Please visit the [Contact Us](#) section for any non-product compliance questions.

China ROHS

Not Reviewed

ELV

Not Relevant

Search Parts in this Series

44248 Series

Mates With

FCC 68 Plugs

Current - Maximum per Contact	1.5A
Grounding to PCB	No
Shielded	No
Voltage - Maximum	150V AC (RMS)

Solder Process Data

Duration at Max. Process Temperature (seconds)	005
Lead-freeProcess Capability	WAVE
Max. Cycles at Max. Process Temperature	001
Process Temperature max. C	260

Material Info

Reference - Drawing Numbers

Application Specification	AS-43860-001
Product Specification	PS-43860-003, RPS-43860-004, RPS-43860-007, RPS-43860-008, RPS-43860-013
Sales Drawing	SD-44248-001

This document was generated on 06/25/2015

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION