

RP135 Series

High Performance Single Stage Power Line Filter

RP135 HIGH PERFORMANCE TO 200A CHASSIS MOUNT FILTER

ROHS COMPLIANT



SPECIFICATIONS

Operating Freq.	: 50/60Hz
Usable Freq.	: DC - 400Hz
Max. Operating Voltage	: 250V +10%
Ambient Temperature	: -25 to 40C
Climatic Category	: 25/100/21
Hipot Rating (L-G)	: 2700VDC
Terminals (-T)	: QD: 0.25 Tab (1-20A) S: 30A (M4) 60-100A (M6) 150-200A (M10)
Safety Approvals	: CSA, UR, EN60939

LEAKAGE CURRENT


Y-cap, nF	mA, 120V/60Hz	mA, 250V/60Hz
0	0	0
.47	0.04	0.08
1	0.09	0.18
2.2	0.2	0.4
4.7	0.4	0.8
10	0.9	1.8
22	2	4
100	9	18

PART NUMBER/ ORDERING

RP135	-X (Amps)	-Y (Ycap, nF)	-T	Weight LBS (KG) Typ.
	1	0	QD	0.1 (0.04)
	3	.47		0.1 (0.04)
	6	1		0.1 (0.04)
	10	2.2		0.1 (0.04)
	16	4.7		0.5 (0.2)
	20	10		0.5 (0.2)
	30	22	S	0.5 (0.2)
	60	100		2.8 (1.3)
	100			6.0 (2.7)
	150			6.0 (2.7)
	180			6.0 (2.7)
	200			6.0 (2.7)

Note: Use any combination of -Y with any -X (Amps) rating
e.g. RP135-100-4.7-S (100 Amps with 4.7nF Ycap)

SCHEMATIC

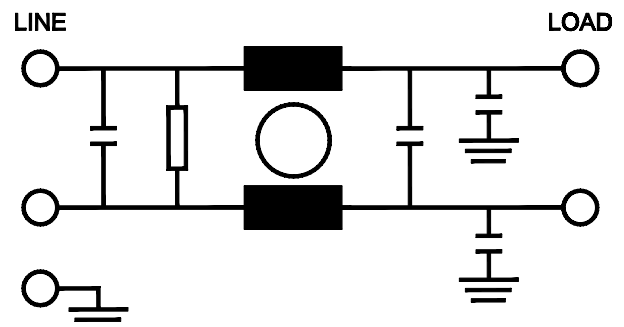

Reference purposes only.
Specifications are subject to change.
Consult factory to verify specifications.

RP135

Typical Insertion Loss, dB (50/50ohm)

Mechanical Dimensions

1 Amp					
FREQ (MHz)	.15	.5	1.0	10	30
CM(dB)	40	50	50	45	40
DM(dB)	15	26	45	50	50

3 Amp					
FREQ (MHz)	.15	.5	1.0	10	30
CM(dB)	30	42	50	55	35
DM(dB)	18	30	40	55	50

6 Amp					
FREQ (MHz)	.15	.5	1.0	10	30
CM(dB)	20	30	36	55	40
DM(dB)	15	26	32	55	40


10/16 Amp					
FREQ (MHz)	.15	.5	1.0	10	30
CM(dB)	18	25	40	55	45
DM(dB)	15	25	40	65	50

20 Amp					
FREQ (MHz)	.15	.5	1.0	10	30
CM(dB)	24	38	45	50	50
DM(dB)	42	60	65	60	50


30/60 Amp					
FREQ (MHz)	.15	.5	1.0	10	30
CM(dB)	20	30	40	45	50
DM(dB)	38	70	70	55	60

100/150/180/200 Amp					
FREQ (MHz)	.15	.5	1.0	10	30
CM(dB)	20	30	40	45	50
DM(dB)	40	60	65	70	65


1/3/6/10 Amp

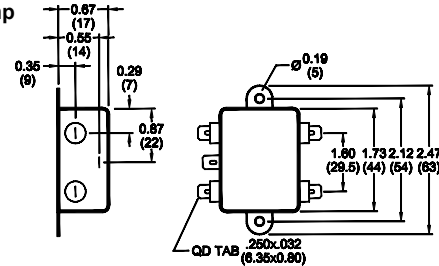


16 Amp

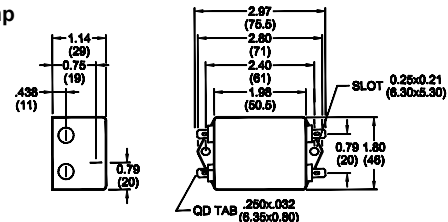


20 Amp

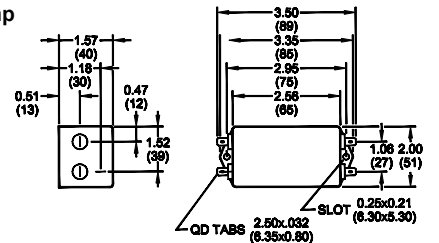


30 Amp

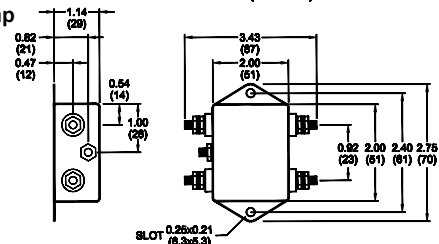

60 Amp

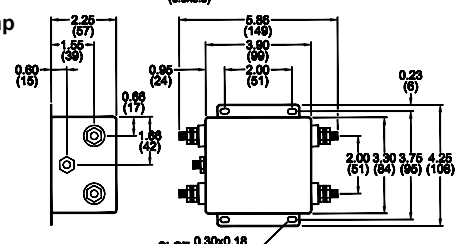

100/150/180/
200 Amp

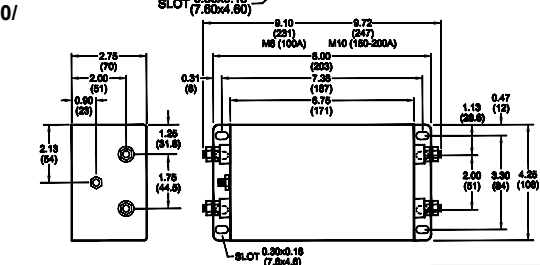

TYPICAL TOLERANCE: +/-0.02 (0.50)

www.radiuspower.com

Reference purposes only.
Specifications are subject to change.
Consult factory to verify specifications.