

RF 19 - Signal indicator, 1 x 1-module

3.14.001.659/0000

For more information, see LEDs.



Suitable for RK 90 system design, illuminated for 2-module keycap.

General information

| | |
|----------------------|---------|
| Color of lens | blue |
| Recommended key grid | 23/x mm |

Dimensions


| | |
|----------------|----------|
| Length | 19.05 mm |
| Width | 19.05 mm |
| Overall height | 9.15 mm |


Mechanical design

| | |
|--------------|-------------------------|
| Mounting | THT soldering in PCB |
| Illumination | fully illuminated 2 LED |
| LED color | blue |
| LED type | 2 mm |

Other specifications

| | |
|--|--|
| Ambient temp. operating min. | -25 °C |
| Ambient temp. operating max. | +70 °C |
| Environmental resistance | acc. to IEC 60068-2-14, -30, -33 and -78 |
| Solderability / solder heat resistance | according to DIN EN 60068-2-20 |
| Wave soldering | 260 °C max. |
| Manual soldering | 350 °C / 5 sec. max. |
| ROHS compliant | yes |
| REACH compliant | yes |

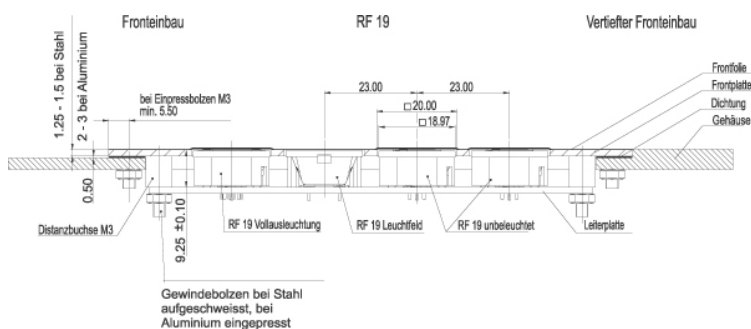

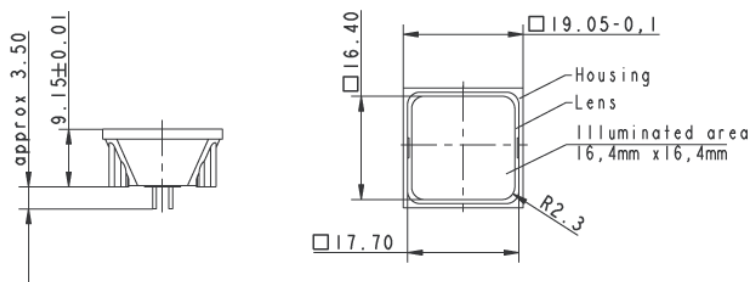

0,5 x 2-module, yellow

