


2000 Slide Switches - up to 5 position 10A 250Vac



- ▶ Slide switches
- ▶ Ratings up to 16A, 250V ac
- ▶ PCB and solder terminals
- ▶ 2, 3, 4 and 5 position
- ▶ Choice of circuits
- ▶ Choice of actuators

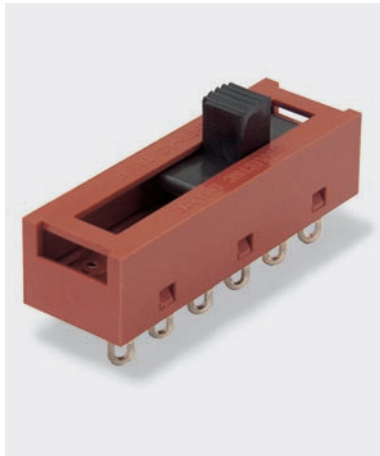

10A 250Vac T85
6(3)A 250Vac T85



UL CSA 16A 250Vac Non Inductive
UL CSA 4A 300Vac
UL 65°C, file no. E45221, CSA file no. LR10990




RoHS compliant

μ contact gap

Please specify: Standard action (SP116) or Light action (SP118).
2000 series lubrication is inorganic and does not degrade plastics.

Technical data on pages 4 & 5.

ORDER FORMAT




▶	TERMINAL	▶	SERIES	▶	POS'N	▶	CIRCUIT Viewed from back	▶	SLIDER						
K	 2.8 x 0.8	2	2 Switching positions	10		0		6		D		L	 Limited travel on 2 pos		
R	 2.8 x 0.8			20											
T	 Solder			30											
X	 PCB 0.8 Sq.			40		1	 Not 2 position	7		E	 Limited travel on 2 pos	N			
Y	 PCB 0.8 Sq. For mounting stability switches have extra "support" terminals * Nominal - Dimension varies with body type. For exact figure call sales			10		2		9		G	 Not 2 position	P	 Limited travel on 2 pos		
			20		3		A		H		R				
			30		4		B	 Not 2 position	J	 Not 2 position	S	 Limited travel on 2 pos			
			40		5	 Also with legend	C		K	 Limited travel on 2 pos	T				
			10												
			20												
			30												
			40												
			10												
			20												
			30												
			40												



X22205C ---



T2220EC ---



T23206A ---



T24306A ---




T25302A ---




T25100A ---

BODY


C 2 positions




H 2 positions




A 3 positions




H 3 positions




A 4 positions



H 4 positions



A 5 positions




OPTIONS

Color


For custom slider colors call the factory. A full range is available for large orders

DIMENSIONS (mm)


2 Position C body




2 Position H body





Cut-out/PCB Matrix




3 Position A body





3 Position H body





4 Position A body




4 Position H body



5 Position A body



2000 Slide Switches - Snap fit and panel mount 10A 250Vac

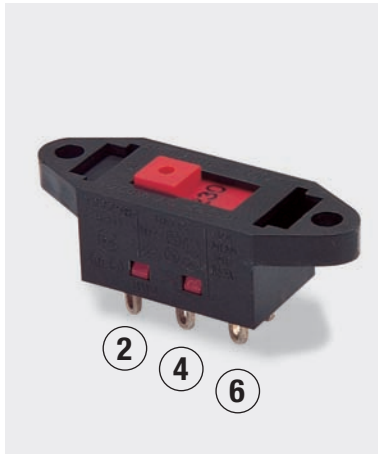

- ▶ 2 way 'voltage selector'
- ▶ Ratings up to 16A, 250V ac
- ▶ Snap fit and panel mount
- ▶ PCB & solder terminals
- ▶ 2 and 3 position
- ▶ Choice of circuits
- ▶ Choice of actuators



10 A 250Vac T85
6(3)A 250Vac T85



UL CSA 16A 250Vac Non Inductive
UL CSA 4A 300Vac
UL 65°C, file no. E45221, CSA file no. LR10990



RoHS compliant


μ contact gap

Please specify: Standard action (SP116) or light action (SP118).
2000 series lubrication is inorganic and does not degrade plastics.

Technical data on pages 4 & 5.

115/230 is preferred legend

B BLACK
W WHITE
R RED

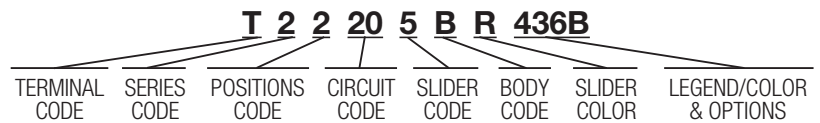

ORDER FORMAT

TERMINAL	SERIES	POS'N	CIRCUIT Viewed from back	SLIDER
K 2.8 x 0.8 R 2.8 x 0.8 T Solder X PCB 0.8 Sq. For mounting stability switches have extra "support" terminals * Nominal - Dimension varies with body type. For exact figure call sales	2	2	10 20 30 40 10 20 30 40 	0 2 Pos B Body only 6 2 & 3 Pos B Body only C 2 & 3 Pos B Body only L 2 & 3 Pos B Body only Limited travel on 2 pos S Limited travel on 2 pos 2 & 3 Pos B Body only 2 2 Pos B Body only 7 2 & 3 Pos B Body only D 2 & 3 Pos B Body only M F Body only Legend optional T 2 & 3 Pos B Body only 3 2 & 3 Pos B Body only 8 E Body only Legend optional E 2 Pos B Body only Limited travel on 2 pos N 2 Pos B Body only 4 2 & 3 Pos B Body only 9 2 & 3 Pos B Body only H 2 Pos B Body only P 2 & 3 Pos B Body only Limited travel on 2 pos 5 2 Pos B Body only Also with legend A 2 Pos B Body only K 2 & 3 Pos B Body only Limited travel on 2 pos R 2 & 3 Pos B Body only



T22208E ---



T22308E ---



T2230MF ---



T22205B ---




T22305B ---



T23204B ---

BODY

B With mounting holes





E Snap fit



Cut-outs must be punched in the direction of insertion

F Snap fit (single pole ON OFF only)



Cut-outs must be punched in the direction of insertion


OPTIONS

Color

For custom slider colors call the factory. A full range is available for large orders

Standard body color is black

Legend printing



436() 437()


() is legend color
(B) - Black
(W) - White
(R) - Red

Please call the sales for custom legends


DIMENSIONS (mm)

Cut-out / PCB Matrix



2 Pos B

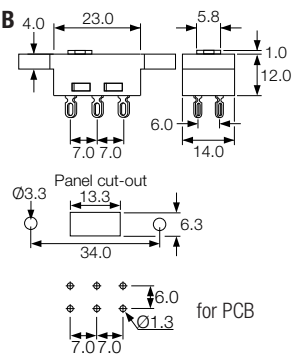

3 Pos B


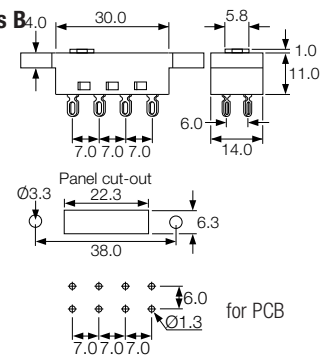


2 Pos E



Panel thickness	Dim. Y
0.8-1.2	29.75/29.85
1.63	30.15/30.25
2.0	30.35/30.45
2.5	30.55/30.65

2 Pos F



Panel thickness	Dim. Y
0.8-1.2	29.75/29.85
1.63	30.15/30.25
2.0	30.35/30.45
2.5	30.55/30.65

for PCB, call sales for details