

“Stay Connected” with



HEYware Products


a PennEngineering® Company

## Heyco® Polyurethane Adhesive-Back Bumpers



|  | PART DIMENSIONS |      |        |      | PART NO.      |             | DESCRIPTION     | Pieces per Sheet |
|--|-----------------|------|--------|------|---------------|-------------|-----------------|------------------|
|  | A               |      | B      |      | Clear         | Black       |                 |                  |
|  | Diameter        |      | Height |      |               |             |                 |                  |
| in.  | mm.             | in.  | mm.    |      |               |             |                 |                  |
| <b>HBA Series - Hemi</b>                             |                 |      |        |      |               |             |                 |                  |
|  | .25             | 6,4  | .06    | 1,6  | <b>N040</b>   | <b>N140</b> | HBA 250-06      | 578              |
|  | .31             | 7,9  | .09    | 2,3  | <b>N027</b>   | <b>N127</b> | HBA 312-09      | 450              |
| <b>NEW!</b>  |                 |      |        |      | <b>NSD027</b> | -           | HBA 312-09-SD   |                  |
|  | .34             | 8,6  |        |      | <b>N007</b>   | <b>N107</b> | HBA 335-09      | 200              |
| <b>NEW!</b>  |                 |      |        |      | <b>NSD007</b> | -           | HBA 335-09-SD   |                  |
|  | .38             | 9,7  | .15    | 3,8  | <b>N012</b>   | <b>N112</b> | HBA 375-15      | 288              |
| <b>NEW!</b>  |                 |      |        |      | <b>NSD012</b> | -           | HBA 375-15-SD   |                  |
|  | .38             | 9,7  | .21    | 5,3  | <b>N022</b>   | <b>N122</b> | HBA 375-21      | 300              |
| <b>NEW!</b>  |                 |      |        |      | <b>NSD022</b> | -           | HBA 375-21-SD   |                  |
|  | .39             | 9,9  | .12    | 3,0  | <b>N010</b>   | <b>N110</b> | HBA 394-12      | 288              |
| <b>NEW!</b>  |                 |      |        |      | <b>NSD010</b> | -           | HBA 394-12-SD   |                  |
|  | .44             | 11,2 | .20    | 5,1  | <b>N002</b>   | <b>N102</b> | HBA 440-20      | 242              |
|  |                 |      |        |      | <b>NSD002</b> | -           | HBA 440-20-SD   |                  |
|  | .62             | 15,7 | .31    | 7,9  | <b>N015</b>   | <b>N115</b> | HBA 620-31      | 128              |
|  | .70             | 17,8 | .38    | 9,7  | <b>N008</b>   | <b>N108</b> | HBA 700-38      | 98               |
|  | .75             | 19,1 | .08    | 1,9  | <b>N039</b>   | <b>N139</b> | HBA 750-08      | 84               |
| <b>CBA Series - Cylinder</b>                         |                 |      |        |      |               |             |                 |                  |
|  | .38             | 9,7  | .13    | 3,2  | <b>N034</b>   | <b>N134</b> | CBA 370-13      | 300              |
| <b>NEW!</b>  |                 |      | .19    | 4,8  | <b>NSD034</b> | -           | CBA 375-13-SD   |                  |
|  |                 |      | .06    | 1,5  | <b>N035</b>   | <b>N135</b> | CBA 370-19      | 200              |
|  | .50             | 12,7 | .14    | 3,6  | <b>N001</b>   | <b>N101</b> | CBA 500-14      | 200              |
| <b>NEW!</b>  |                 |      | .25    | 6,4  | <b>NSD001</b> | -           | CBA 500-14-SD   |                  |
|  | .65             | 16,5 | .40    | 10,2 | <b>N006</b>   | <b>N106</b> | CBA 500-25      | 128              |
| <b>NEW!</b>  |                 |      |        |      | <b>N011</b>   | <b>N111</b> | CBA 650-40      |                  |
|  | .75             | 19,1 | .16    | 4,1  | <b>N044</b>   | <b>N144</b> | CBA 750-16      | 98               |
|  | .78             | 19,8 | .20    | 5,1  | <b>N041</b>   | <b>N141</b> | CBA 780-20      | 84               |
|  | .81             | 20,6 | .12    | 3,0  | <b>N024</b>   | <b>N124</b> | CBA 810-12      | 72               |
| <b>NEW!</b>  | 1.23            | 31,2 | .10    | 2,5  | <b>N072</b>   | <b>N172</b> | CBA 1230-10     | 32               |
| <b>TCBA Series - Tapered Cylinder</b>                |                 |      |        |      |               |             |                 |                  |
|  | .38             | 9,7  | .18    | 4,6  | <b>NSD067</b> | -           | TCBA 375-18-SD  | 288              |
| <b>NEW!</b>  |                 |      |        |      | <b>N037</b>   | <b>N137</b> | TCBA 720-56     | 1                |
| <b>NEW!</b>  | .72             | 18,2 | .56    | 14,2 |               |             |                 |                  |
| <b>CDBA Series - Pocket</b>                          |                 |      |        |      |               |             |                 |                  |
|  | .50             | 12,7 | .14    | 3,6  | <b>N018</b>   | <b>N118</b> | CDBA 500-14     | 200              |
| <b>NEW!</b>  |                 |      |        |      | <b>NSD018</b> | -           | CDBA 500-14-SD  |                  |
|  | .88             | 22,4 | .40    | 10,2 | <b>N017</b>   | <b>N117</b> | CDBA 880-40     | 72               |
|  | 1.81            | 46,0 | .60    | 15,2 | <b>N030</b>   | <b>N130</b> | CDBA 1810-60    | 1                |
| <b>RCDBA Series - Reverse Cylindrical Depression</b> |                 |      |        |      |               |             |                 |                  |
| <b>NEW!</b>  | .50             | 12,7 | .20    | 5,1  | <b>NSD058</b> | -           | RCDBA 500-20-SD | 200              |
| <b>TBA Series - Square or Tapered</b>                |                 |      |        |      |               |             |                 |                  |
|  | .40             | 10,2 | .10    | 2,5  | <b>N020</b>   | <b>N120</b> | TBA 4040-10     | 242              |
|  | .50             | 12,7 | .12    | 3,0  | <b>N009</b>   | <b>N109</b> | TBA 5050-12     | 200              |
|  |                 |      | .23    | 5,8  | <b>N03R</b>   | <b>N13R</b> | TBA 5050-23     |                  |
| <b>NEW!</b>  | .78             | 19,8 | .25    | 6,4  | <b>N029</b>   | <b>N129</b> | TBA 7878-25     | 98               |
| <b>NEW!</b>  |                 |      | .38    | 9,7  | <b>N004</b>   | <b>N104</b> | TBA 7878-38     | 1                |
|  | .81             | 20,6 | .30    | 7,6  | <b>N019</b>   | <b>N119</b> | TBA 8181-30     | 98               |
| <b>NEW!</b>  | 1.00            | 25,4 | .18    | 4,6  | <b>N036</b>   | <b>N136</b> | TBA 100100-18   | 5                |
| <b>RPBA Series - Round Pyramid</b>                   |                 |      |        |      |               |             |                 |                  |
| <b>NEW!</b>  | .50             | 12,7 | .15    | 3,8  | <b>NSD033</b> | -           | RPBA 500-15-SD  | 200              |

- Quick and easy installation—simply peel off backing and press into place. With no holes to drill, and no screws or rivets needed, adhesive backed bumpers will save you time and money.
- Bumpers can be attached to a wide variety of surfaces; aluminum, ceramic, formica, glass, painted surfaces, polyethylene, polypropylene, vinyl, and steel.
- Adhesive backed bumpers are nonmarking, nonstaining, skid, and scratch resistant.
- Surface must be clean, dry, and free of grease, oil, and other common solvents to obtain maximum adhesion. Clean surfaces with low strength solvents such as Isopropyl Alcohol or Heptane.
- Bumpers have a rubber-based pressure sensitive adhesive with an end use temperature of 0°F (-18°C) to 180°F (82°C).

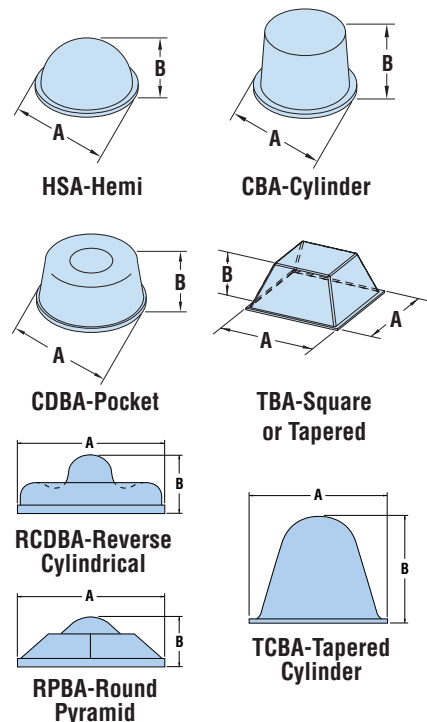

Standard colors clear and black. For white, gray or brown consult Heyco.  
NSD refers to soft durometer Polyurethane (Shora A 45-55) and will not be available in Black.

|                     |   |
|---------------------|---|
| Material            | Polyurethane  |
| Certifications      | Recognized under the Component Program of Underwriters' Laboratories File E196663 |
| Flammability Rating | HB  |
| Temperature Range   | 0°F (-18°C) to 180°F (82°C)   |