
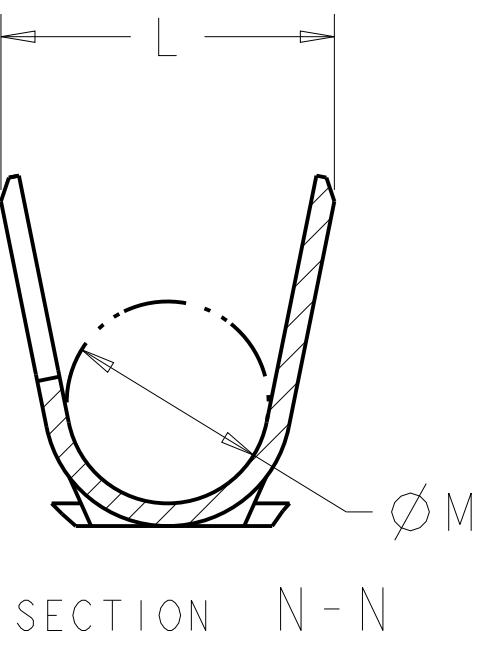
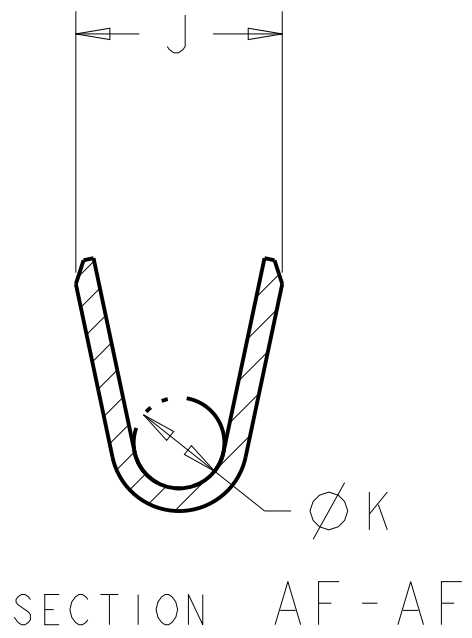
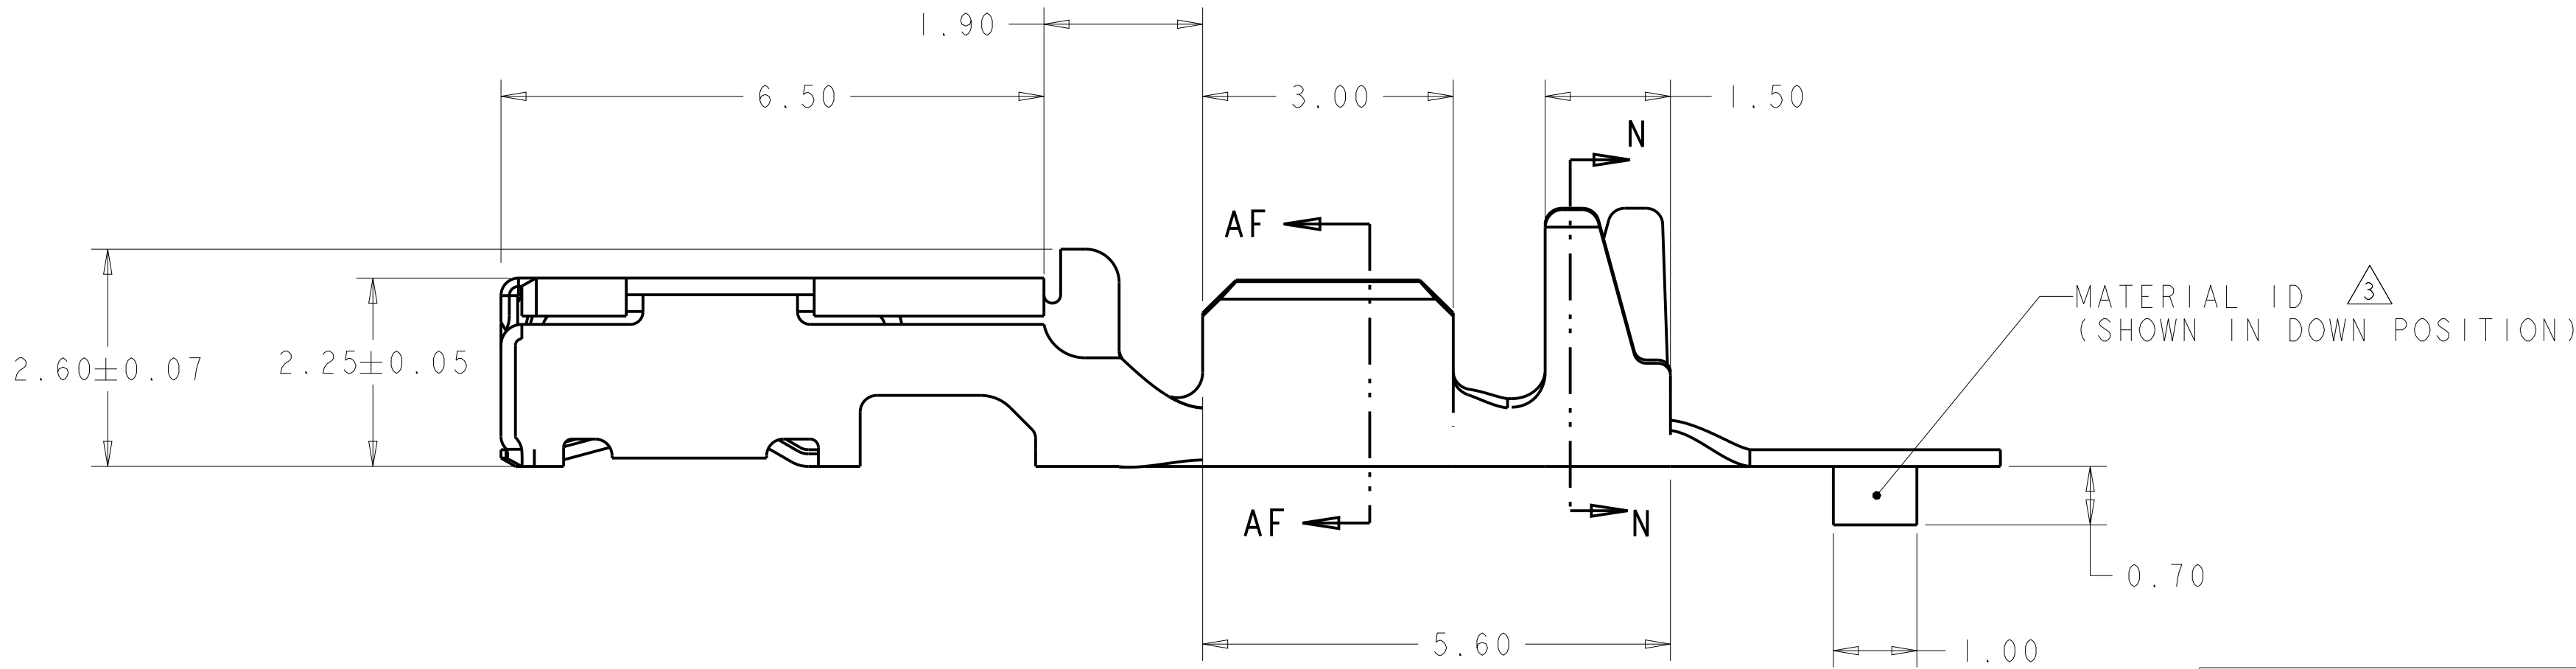
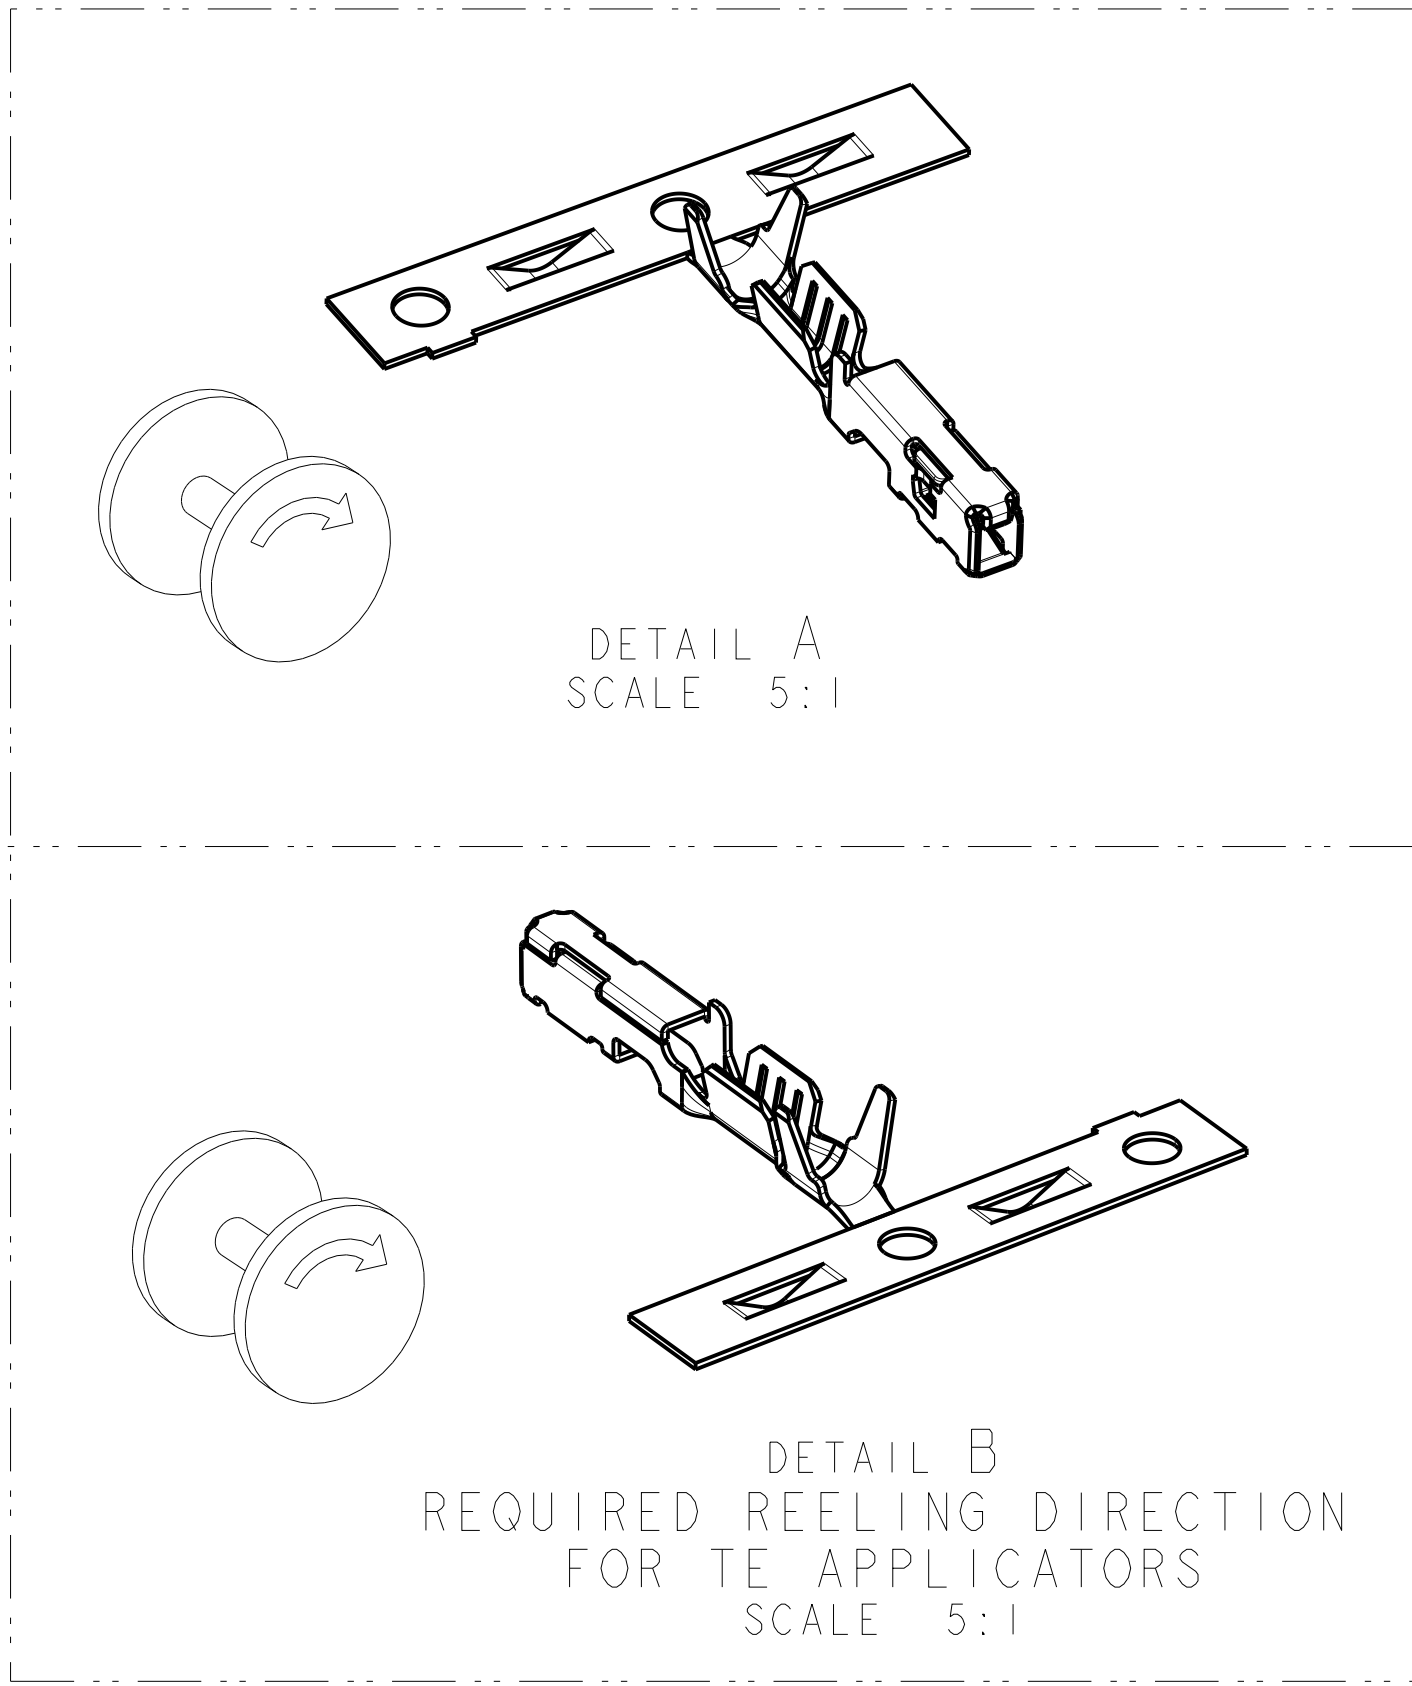


| REVISIONS |      |                           |           |      |       |
|-----------|------|---------------------------|-----------|------|-------|
| P.        | LTR. | DESCRIPTION               | DATE      | DWN. | APVD. |
|           | B1   | REVISED PER ECO-13-006182 | 09APR2013 | DLD  | CJS   |
|           | B2   | REVISED PER ECO-14-003008 | 28FEB2014 | DLD  | CJS   |
|           |      |                           |           |      |       |
|           |      |                           |           |      |       |

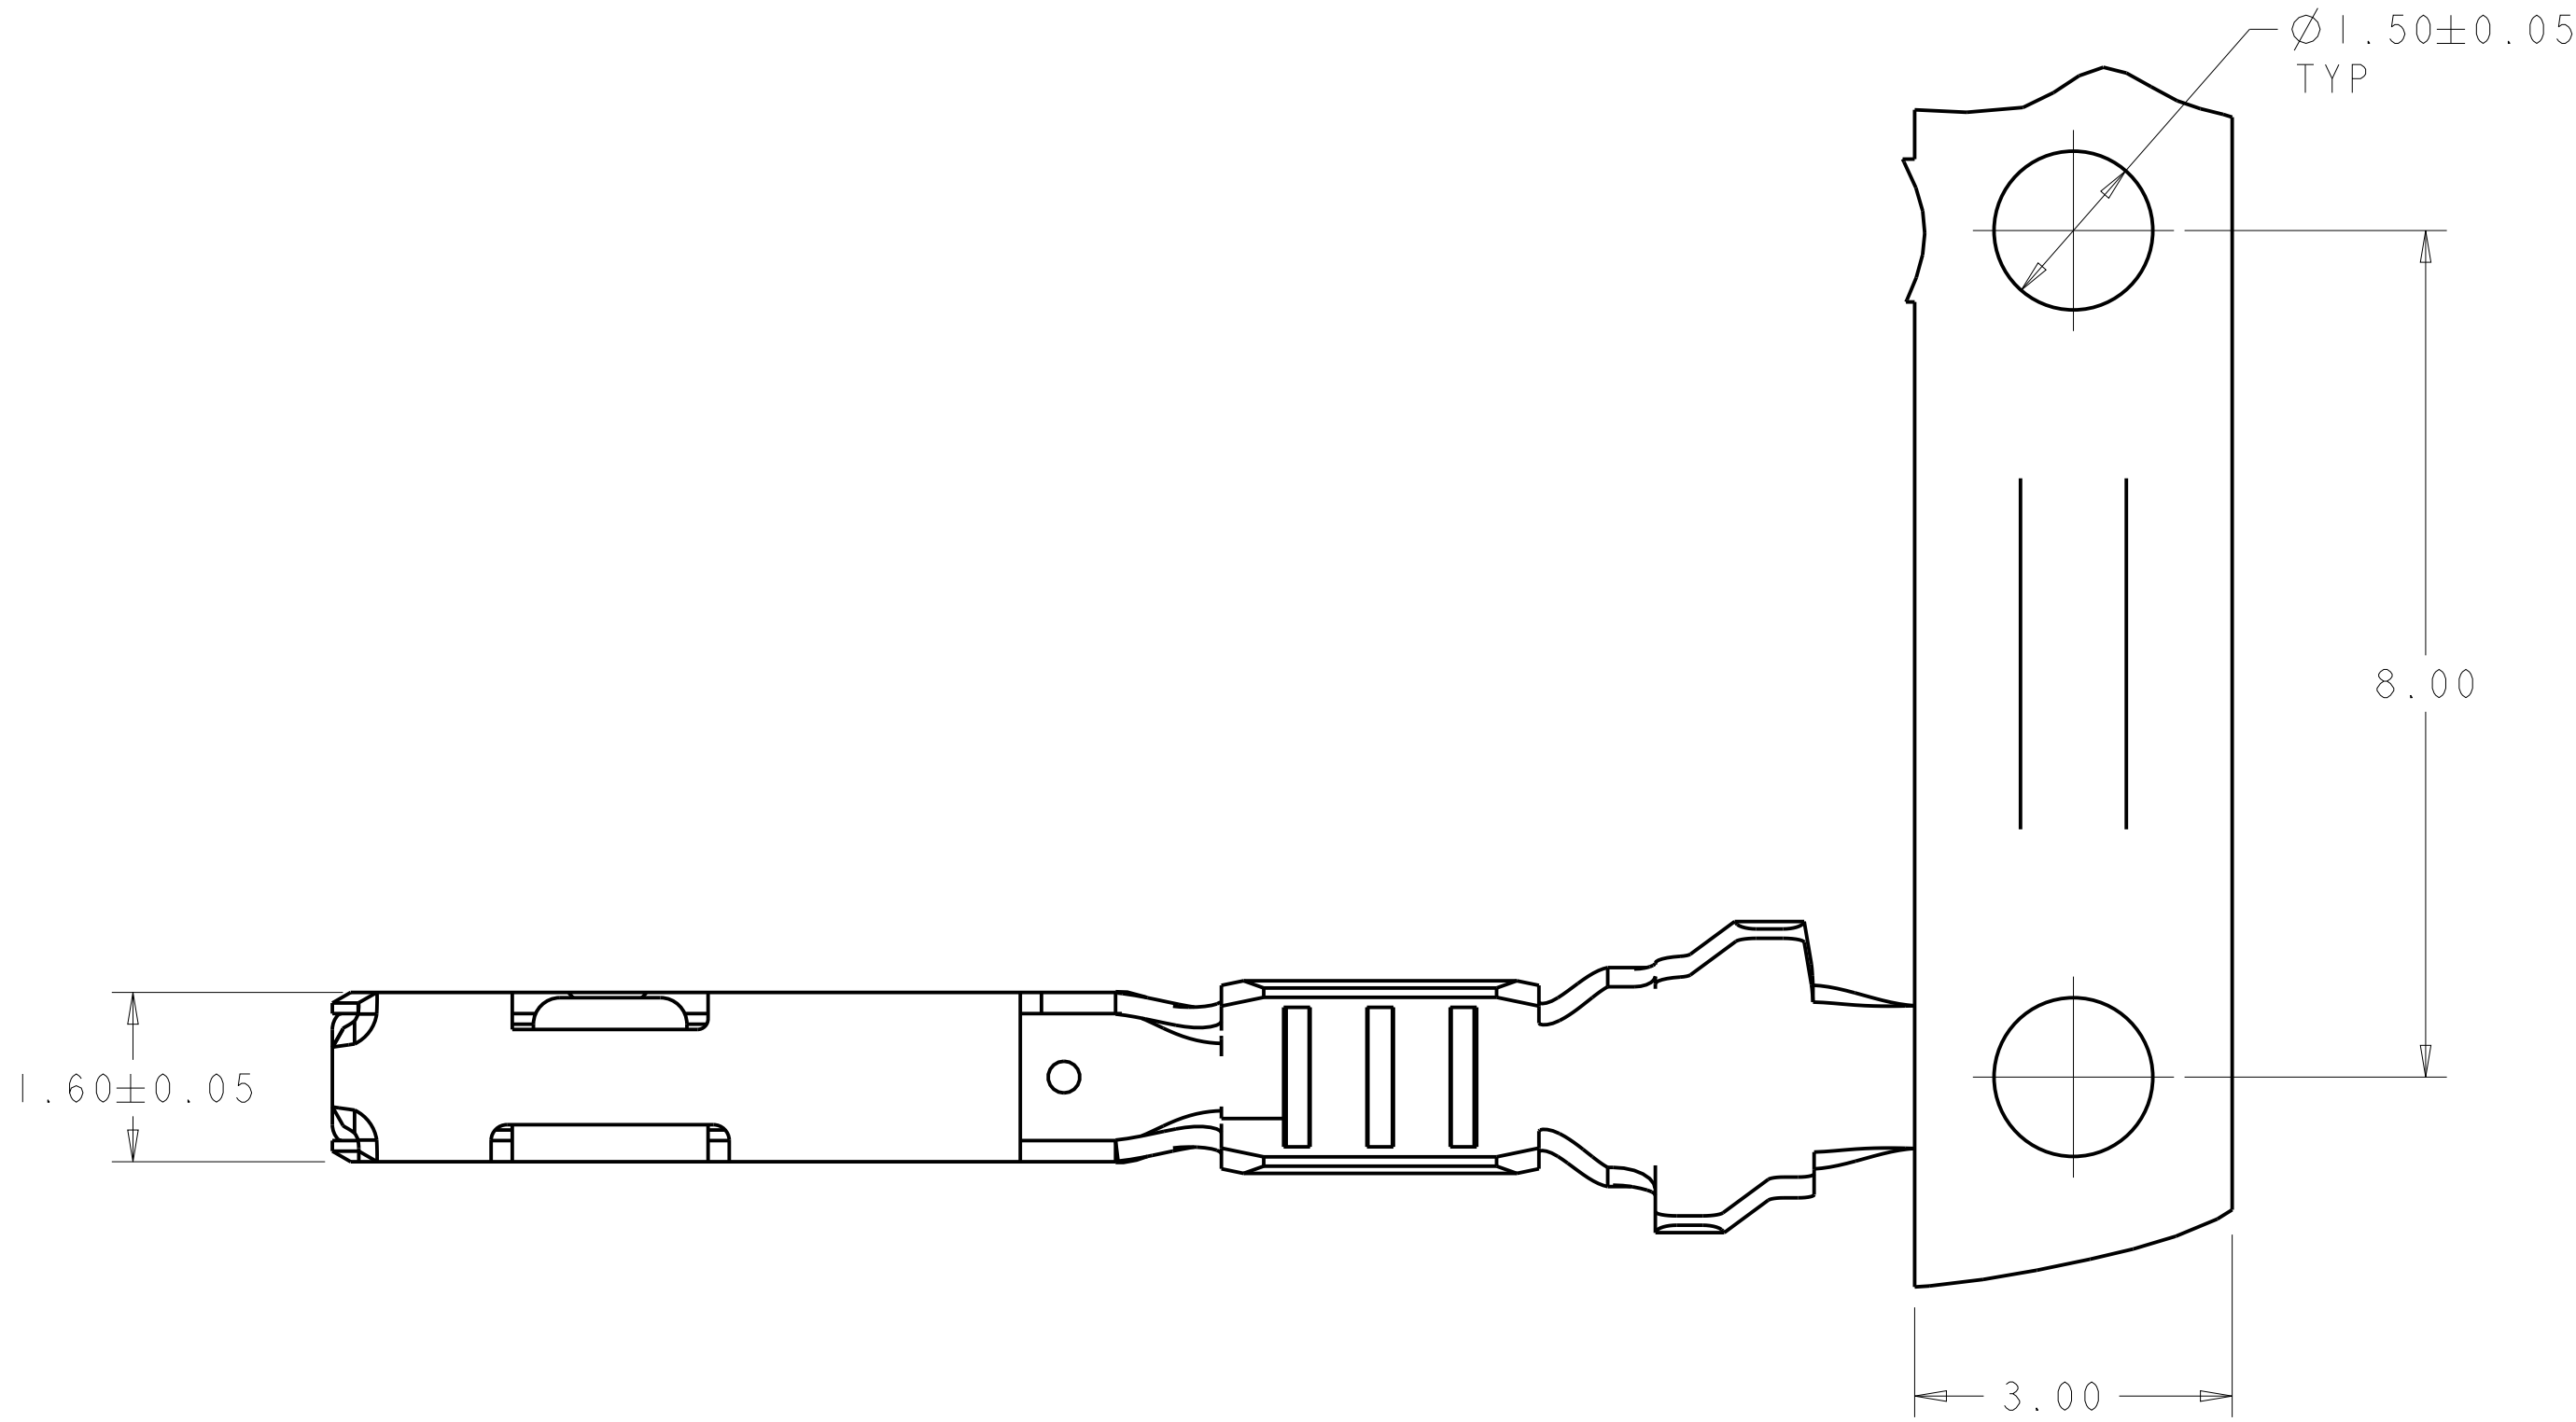

- 1 MATERIAL: COPPER ALLOY
- 2 FINISH: PRE-PLATED WITH 1.00µm MIN BRIGHT TIN
- 3 MATERIAL ID FEATURE IN "DOWN" POSITION.
4. THE INTENDED TEMPERATURE RANGE FOR THIS TERMINAL IS -40°C TO +100°C.
5. TERMINAL HAS NYE LUBRICANTS NYETACT 561J-50-AG PERFORMANCE LUBE/GREASE APPLIED. THIS IS A WHITISH COLORED LUBE. AMOUNT AND VISIBILITY MAY VARY.

|                                 |          |      |      |      |      |        |                                               |             |
|---------------------------------|----------|------|------|------|------|--------|-----------------------------------------------|-------------|
| 0.13mm <sup>2</sup> = 0.85-1.05 | DETAIL B | 1.40 | 2.40 | 0.80 | 1.85 | 2 3    | 2X 0.13mm <sup>2</sup><br>0.35mm <sup>2</sup> | 1924955-8   |
| 0.35mm <sup>2</sup> = 1.10-1.40 |          |      |      |      |      |        |                                               |             |
| 0.85-1.05                       | DETAIL B | 0.85 | 1.82 | 0.65 | 1.50 | 2 3    | 26 [0.13mm <sup>2</sup> ]                     | 1924955-7   |
| 0.13mm <sup>2</sup> = 0.85-1.05 | DETAIL A | 1.40 | 2.40 | 0.80 | 1.85 | 2 3    | 2X 0.13mm <sup>2</sup><br>0.35mm <sup>2</sup> | 1924955-6   |
| 0.35mm <sup>2</sup> = 1.10-1.40 |          |      |      |      |      |        |                                               |             |
| 0.85-1.05                       | DETAIL A | 0.85 | 1.82 | 0.65 | 1.50 | 2 3    | 26 [0.13mm <sup>2</sup> ]                     | 1924955-5   |
| 2.06 MAX                        | DETAIL B | 1.78 | 2.94 | 1.00 | 1.96 | 2 3    | 18 [0.75mm <sup>2</sup> ]                     | 1924955-4   |
| 1.50-1.85                       | DETAIL B | 1.78 | 2.94 | 0.80 | 1.82 | 2 3    | 20-22 [0.5-0.35mm <sup>2</sup> ]              | 1924955-3   |
| 2.06 MAX                        | DETAIL A | 1.78 | 2.94 | 1.00 | 1.96 | 2 3    | 18 [0.75mm <sup>2</sup> ]                     | 1924955-2   |
| 1.50-1.85                       | DETAIL A | 1.78 | 2.94 | 0.80 | 1.82 | 2 3    | 20-22 [0.5-0.35mm <sup>2</sup> ]              | 1924955-1   |
| INSULATION DIAMETER             | REELING  | M    | L    | K    | J    | FINISH | WIRE SIZE                                     | PART NUMBER |

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN F. KINSEY 17DEC2007  
CHK F. KINSEY 17DEC2007  
APVD J. MYER 17DEC2007

DIMENSIONS:

mm

0 PLC ±  
1 PLC ±  
2 PLC ±0.15  
3 PLC ±  
4 PLC ±  
ANGLES ±  
FINISH -

MATERIAL

1

SEE TABLE

PRODUCT SPEC  
108-2296

APPLICATION SPEC  
114-13183

WEIGHT -

CUSTOMER DRAWING

NAME

SIZE CAGE CODE DRAWING NO  
A100779

RESTRICTED TO

TE Connectivity

CONTACT,  
0.64mm, FEMALE, GENERATION Y,  
UNSEALED APPLICATIONS

SCALE 15:1 SHEET 1 OF 1 REV B2