
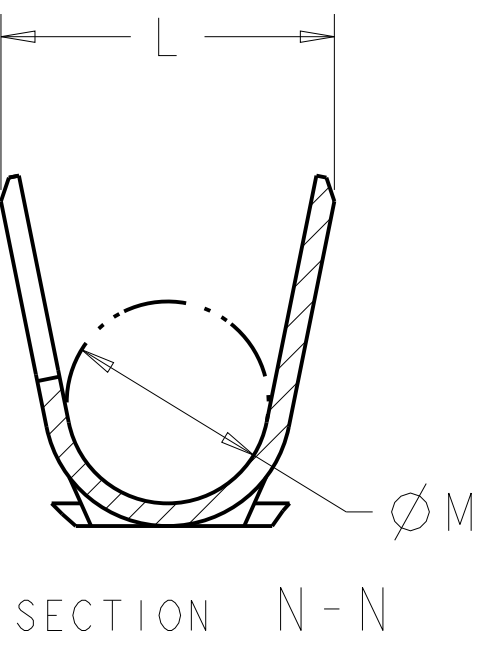
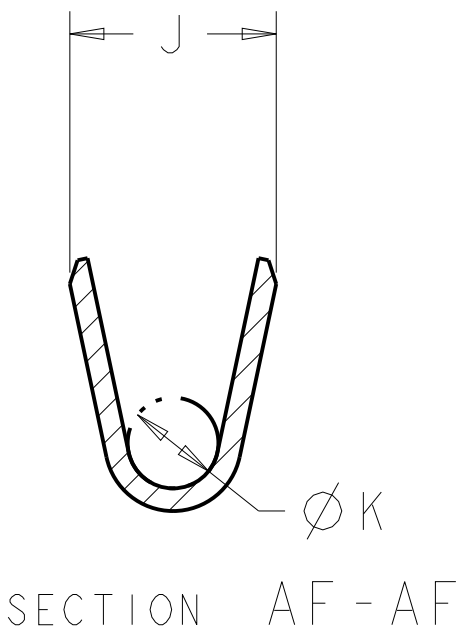
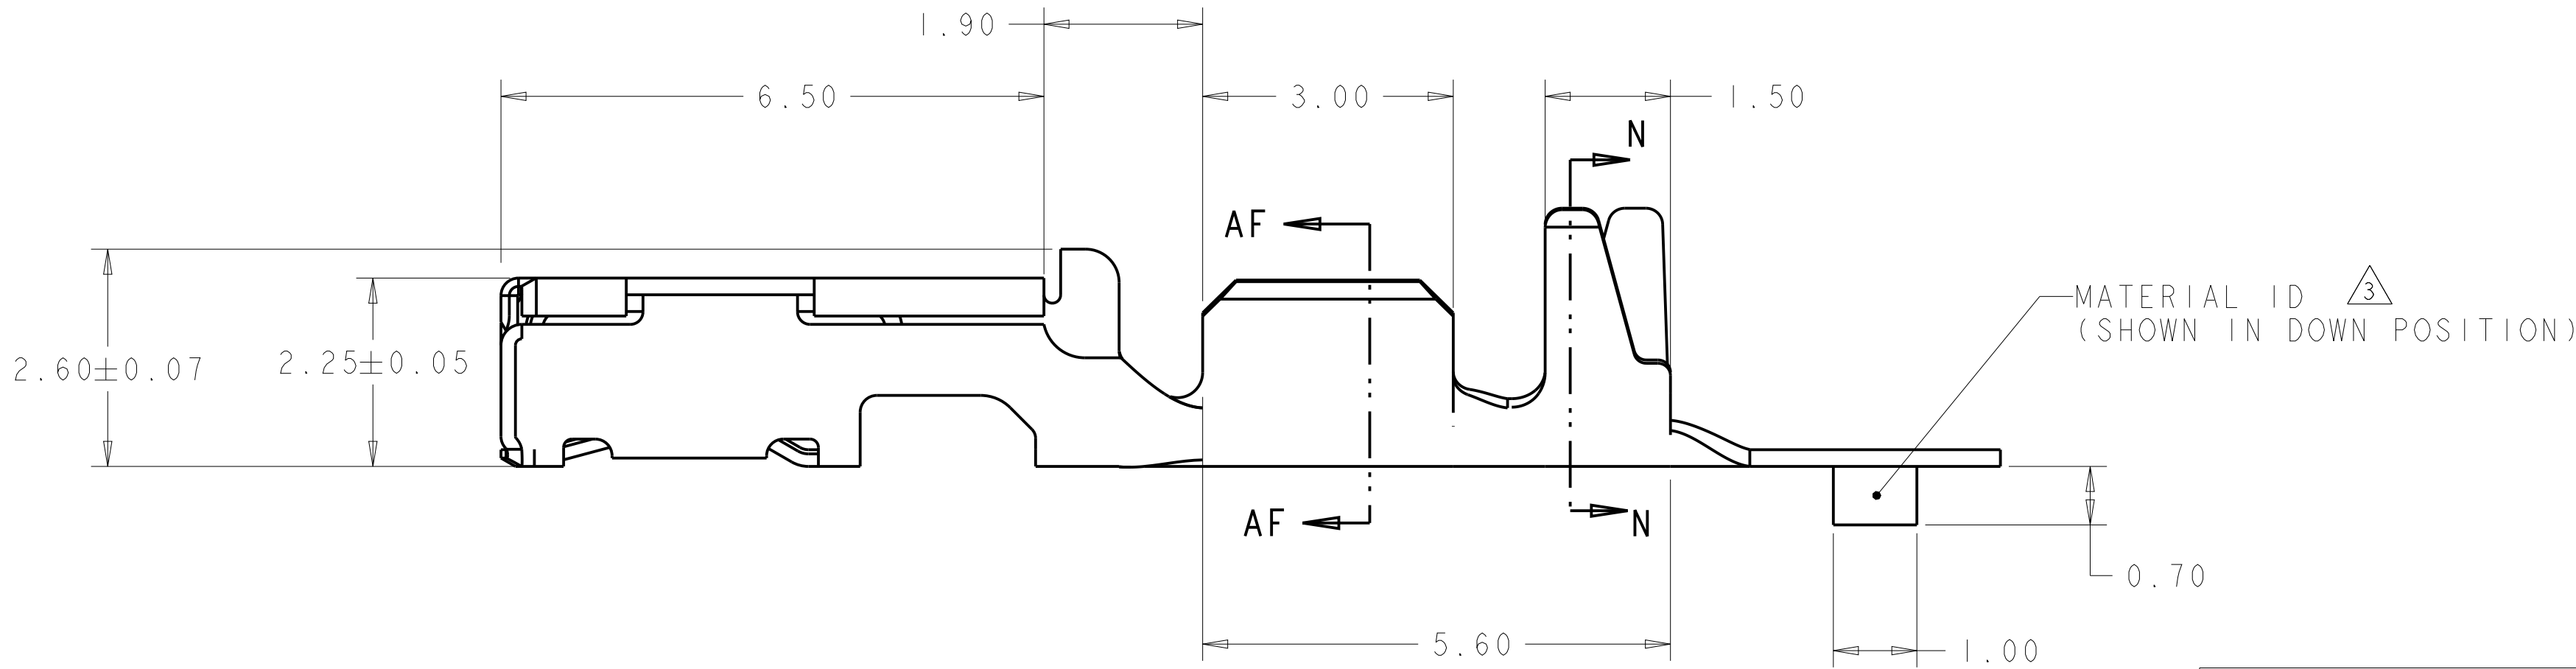
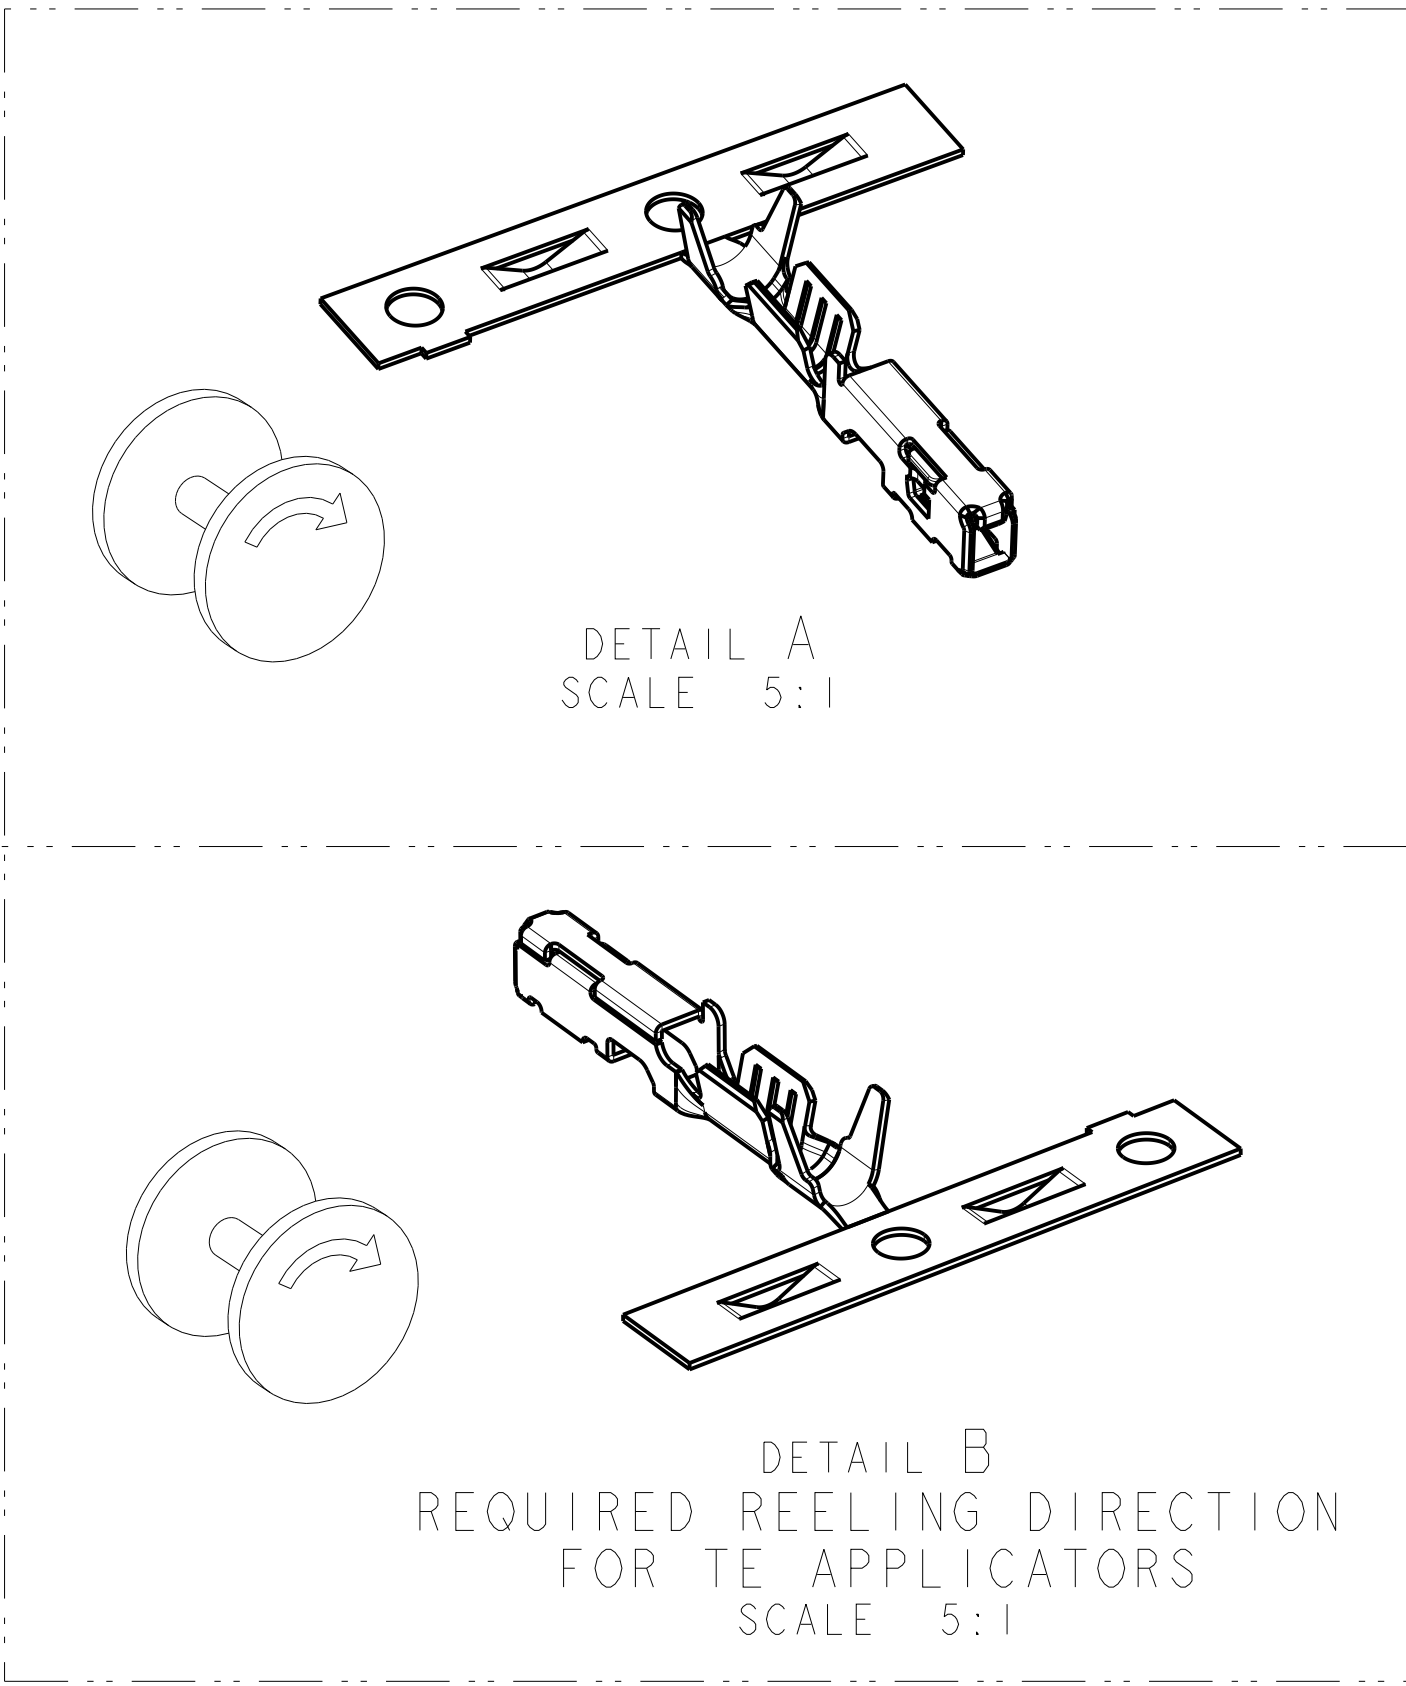


REVISIONS					
P.	LTR.	DESCRIPTION	DATE	DWN.	APVD.
	B1	REVISED PER ECO-13-006182	09APR2013	DLD	CJS
	B2	REVISED PER ECO-14-003008	28FEB2014	DLD	CJS

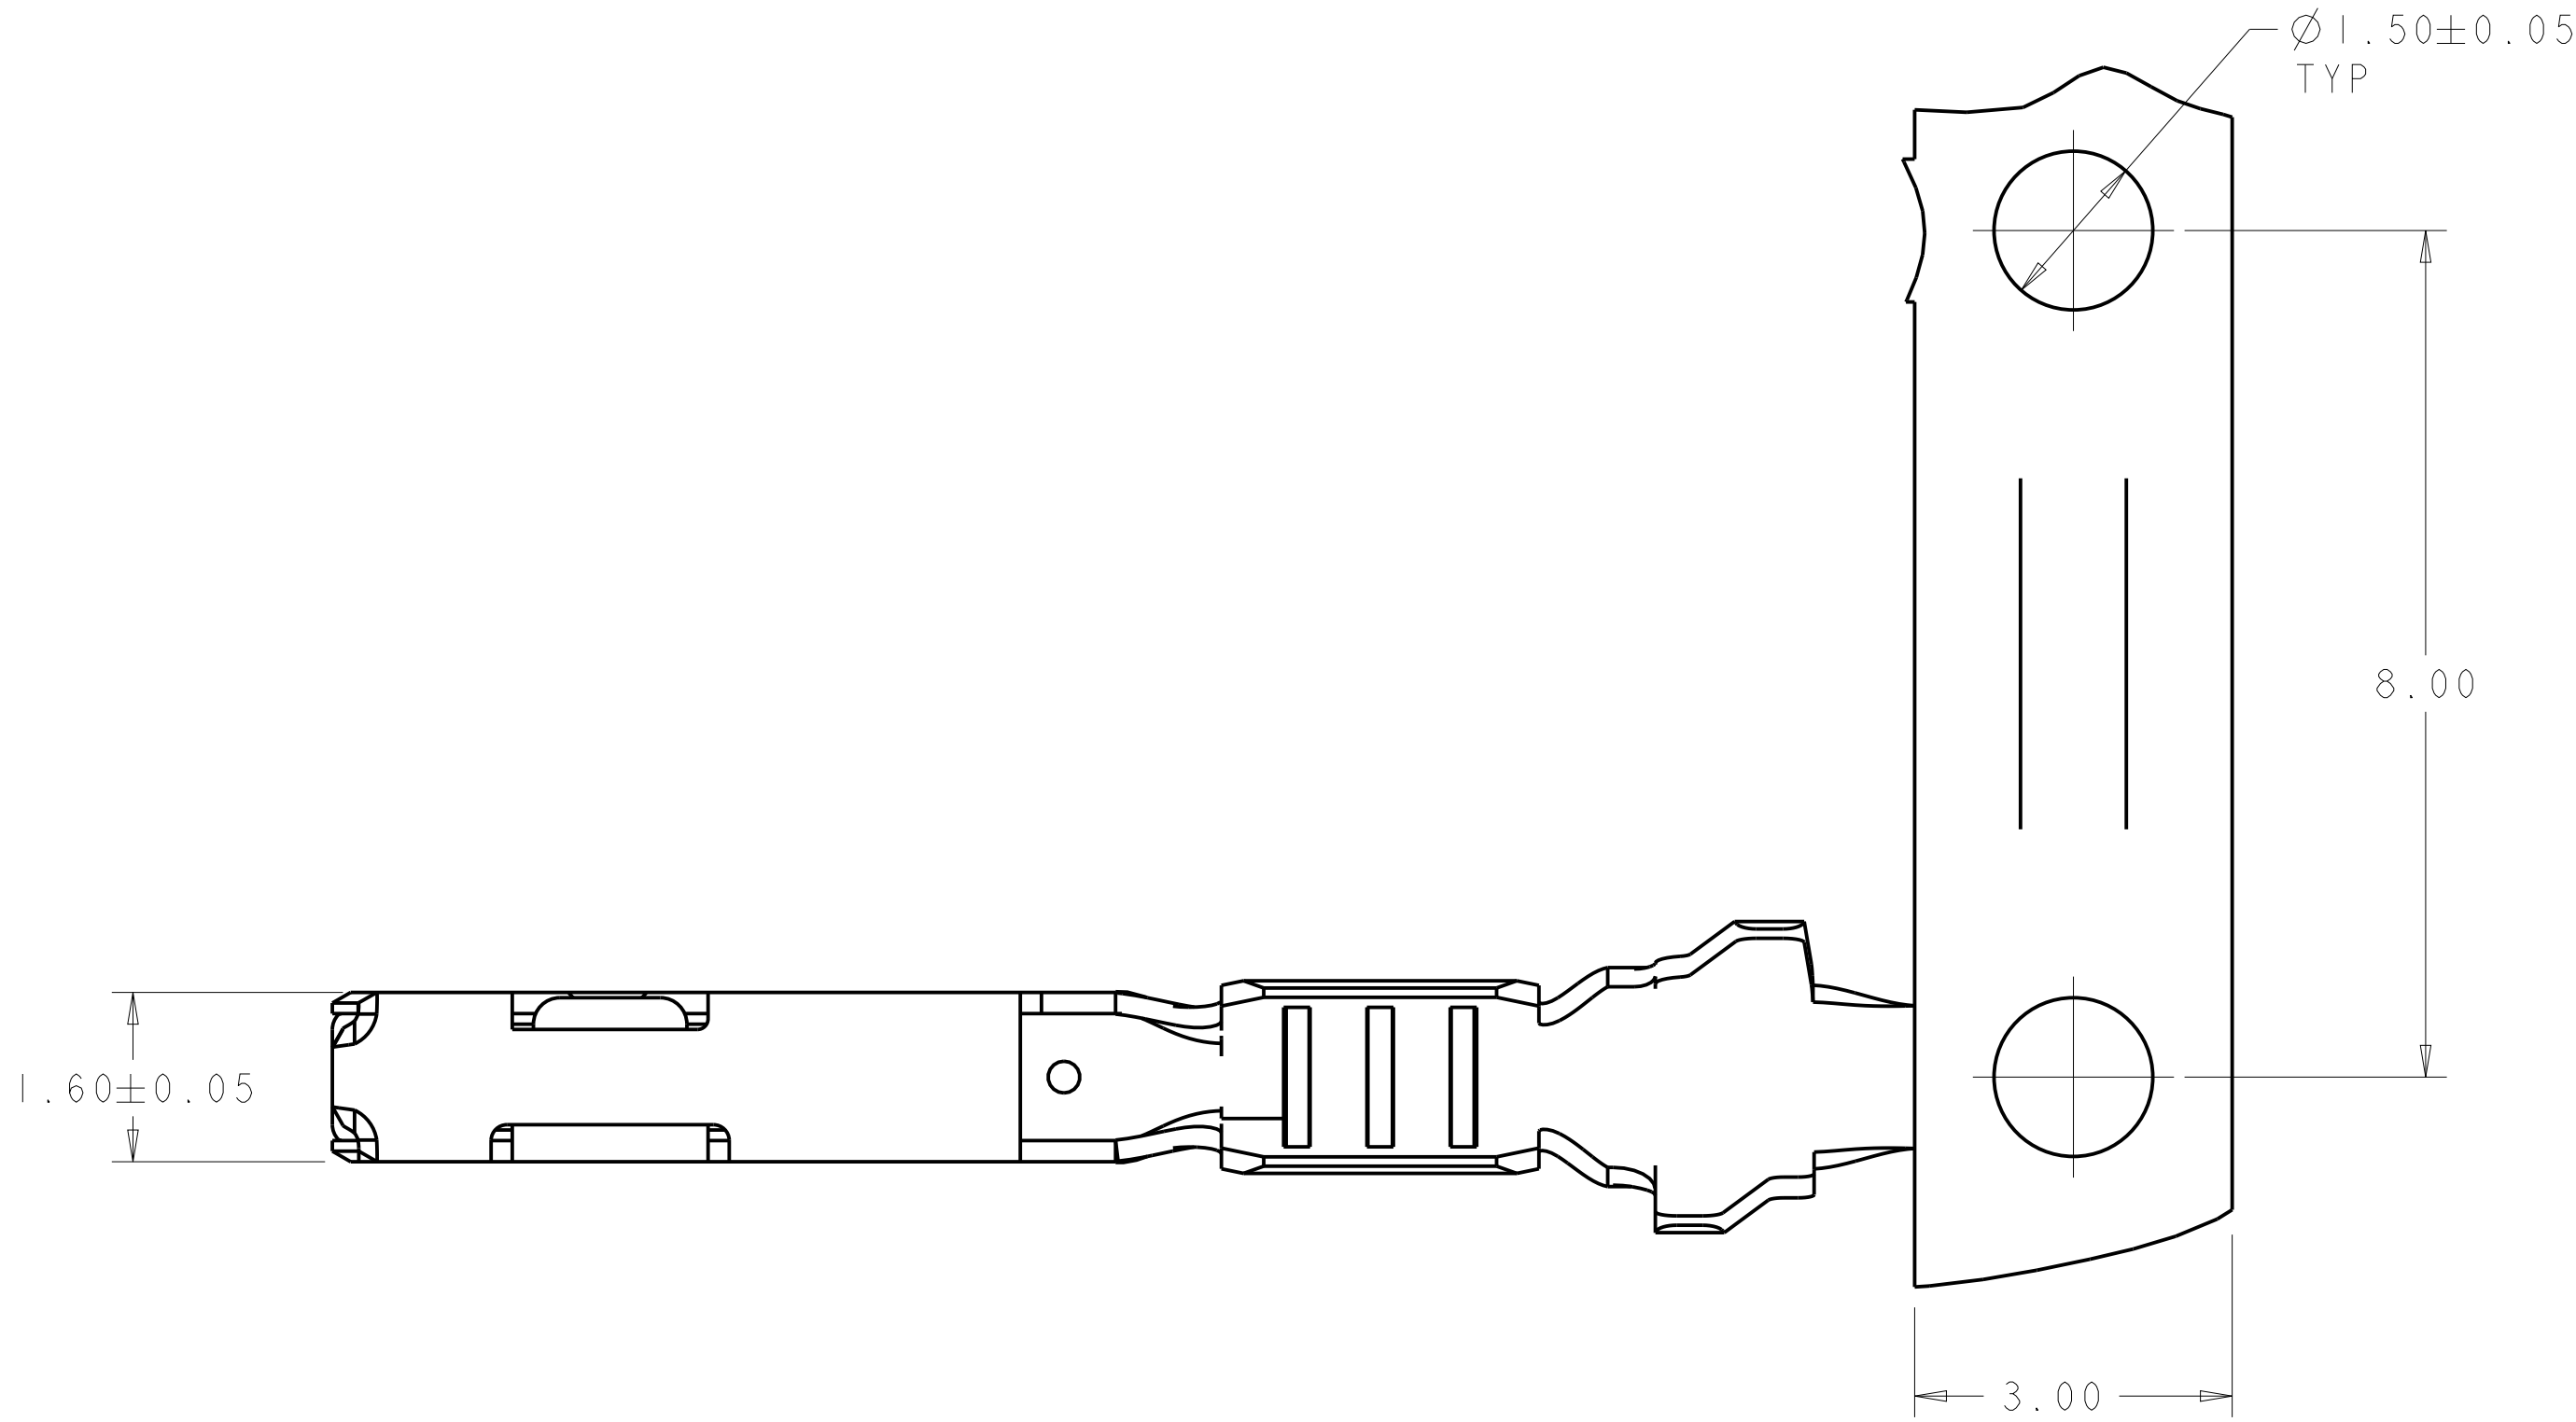

- 1 MATERIAL: COPPER ALLOY
- 2 FINISH: PRE-PLATED WITH 1.00µm MIN BRIGHT TIN
- 3 MATERIAL ID FEATURE IN "DOWN" POSITION.
4. THE INTENDED TEMPERATURE RANGE FOR THIS TERMINAL IS -40°C TO +100°C.
5. TERMINAL HAS NYE LUBRICANTS NYETACT 561J-50-AG PERFORMANCE LUBE/GREASE APPLIED. THIS IS A WHITISH COLORED LUBE. AMOUNT AND VISIBILITY MAY VARY.

0.13mm ² = 0.85-1.05	DETAIL B	1.40	2.40	0.80	1.85	2	3	2X 0.13mm ²	1924955-8
0.35mm ² = 1.10-1.40								0.35mm ²	
0.85-1.05	DETAIL B	0.85	1.82	0.65	1.50	2	3	26 [0.13mm ²]	1924955-7
0.13mm ² = 0.85-1.05	DETAIL A	1.40	2.40	0.80	1.85	2	3	2X 0.13mm ²	1924955-6
0.35mm ² = 1.10-1.40								0.35mm ²	
0.85-1.05	DETAIL A	0.85	1.82	0.65	1.50	2	3	26 [0.13mm ²]	1924955-5
2.06 MAX	DETAIL B	1.78	2.94	1.00	1.96	2	3	18 [0.75mm ²]	1924955-4
1.50-1.85	DETAIL B	1.78	2.94	0.80	1.82	2	3	20-22 [0.5-0.35mm ²]	1924955-3
2.06 MAX	DETAIL A	1.78	2.94	1.00	1.96	2	3	18 [0.75mm ²]	1924955-2
1.50-1.85	DETAIL A	1.78	2.94	0.80	1.82	2	3	20-22 [0.5-0.35mm ²]	1924955-1
INSULATION DIAMETER	REELING	M	L	K	J	FINISH		WIRE SIZE	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:
mm

MATERIAL

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC ±
1 PLC ±
2 PLC ±0.15
3 PLC ±
4 PLC ±
ANGLES ±
FINISH

SEE TABLE

DWN F. KINSEY 17DEC2007
CHK F. KINSEY 17DEC2007
APVD J. MYER 17DEC2007

PRODUCT SPEC
108-2296
APPLICATION SPEC
114-13183

WEIGHT
-

CUSTOMER DRAWING

TE Connectivity

NAME
CONTACT,
0.64mm, FEMALE, GENERATION Y,
UNSEALED APPLICATIONS

SIZE
A1

CAGE CODE
00779

DRAWING NO
1924955

RESTRICTED TO
-

SCALE
15:1

SHEET
1

OF
1

REV
B2