

LISA2-PIN-N119 MINIATURE LENS FOR NICHIA 119 SERIES OF LEDS



- Lens material optical grade PMMA with high UV and temperature resistance (105°C/220°F). Lens holder molded of high quality black PC (120°C/248°F)
- High optical efficiency, up to 90%.
- Integrated holder with small position pins, see drawing below for more details. Fastening of holder to PCB with appropriate adhesive, e.c. epoxy or polyurethane based. NOTE: DO NOT USE SUPERGLUE.
- Please check fastening details from this link: (http://www.ledil.com/datasheets/DataSheet_GLUES.pdf)
- Very small and compact dimensions: Diameter 9.9 mm, height 6.8 mm



LENS TYPES

| NAME | ORDERING CODE | FWHM Angle |
|---------------------|--------------------------|-------------|
| Lisa2-Pin Real Spot | FA11554_Lisa2-RS-Pin-N19 | ±8° |
| Lisa2-Pin Medium | FA10998_Lisa2-M-Pin-N19 | ±13° |
| Lisa2-Pin Oval | FA11127_Lisa2-O-Pin-N19 | ±10° x ±24° |
| Lisa2-Pin Wide | FA10999_Lisa2-W-Pin-N19 | ±21° |
| Lisa2-Pin WW | FA11000_Lisa2-WW-Pin-N19 | Coming soon |

© Ledil Oy – PRELIMINARY - Subject to change without prior notice



MEASUREMENT DATA

Relative Intensity of F11046_Lisa2-RS-N119

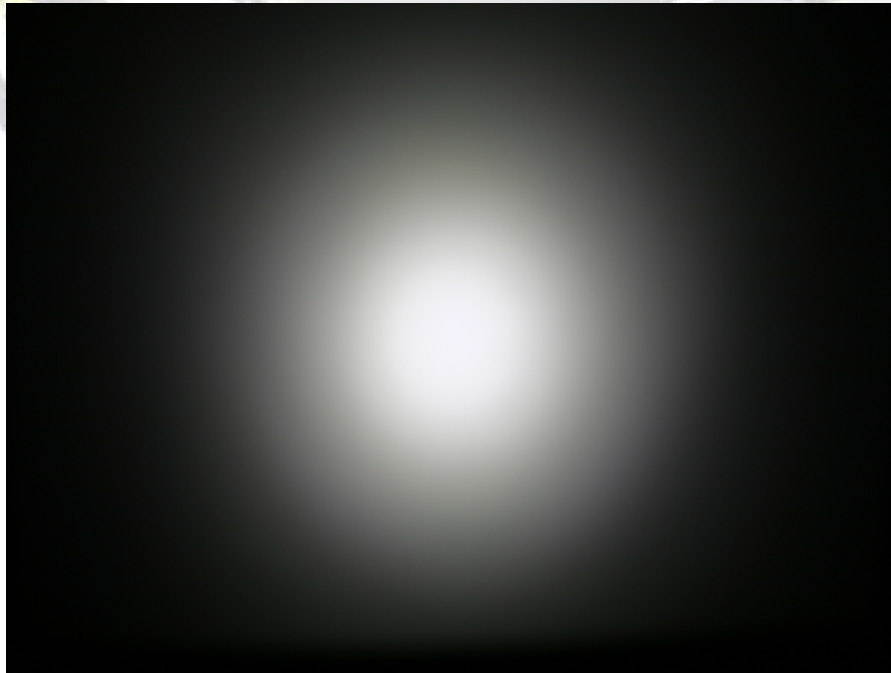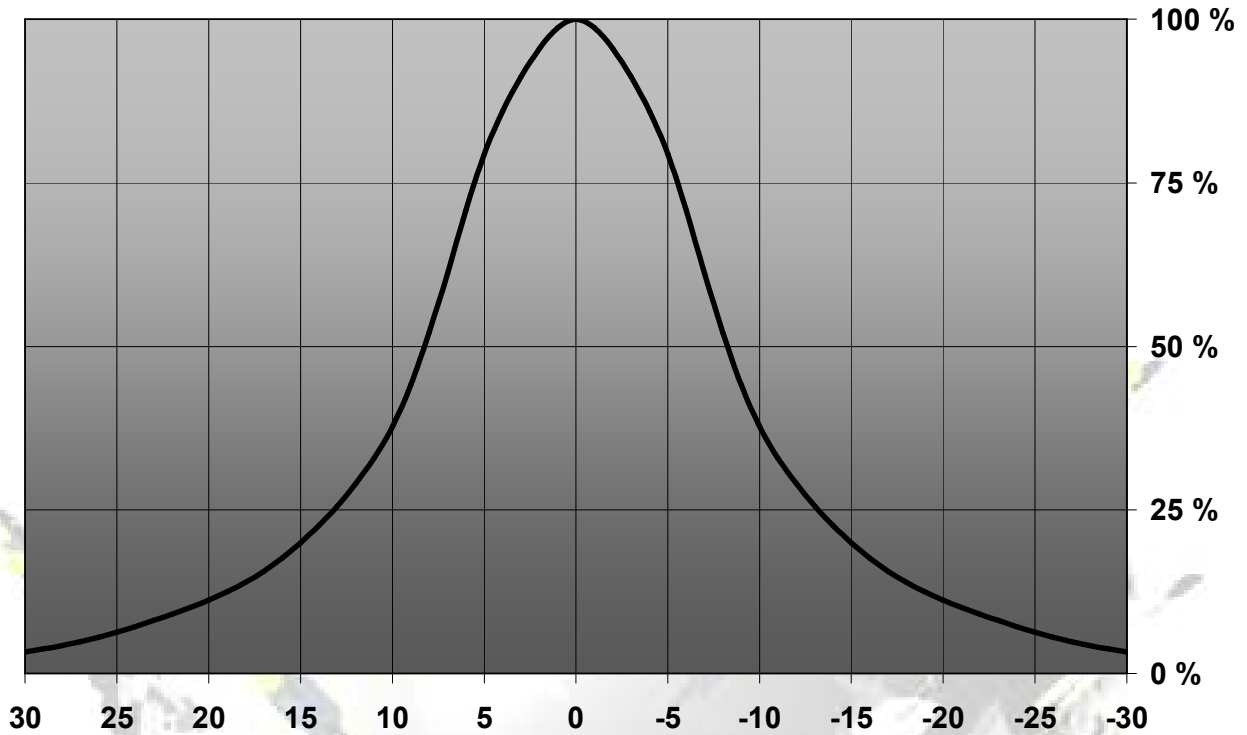



© Ledil Oy - PRELIMINARY - Subject to change without prior notice

Relative intensity of FA10998_Lisa2-M-Pin-N119

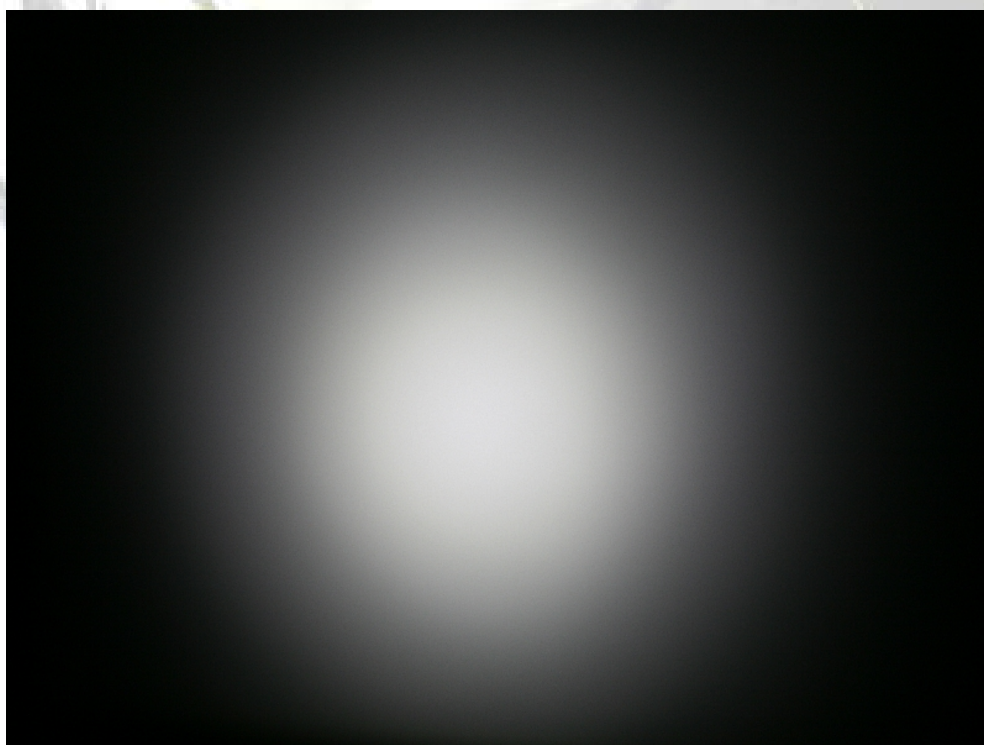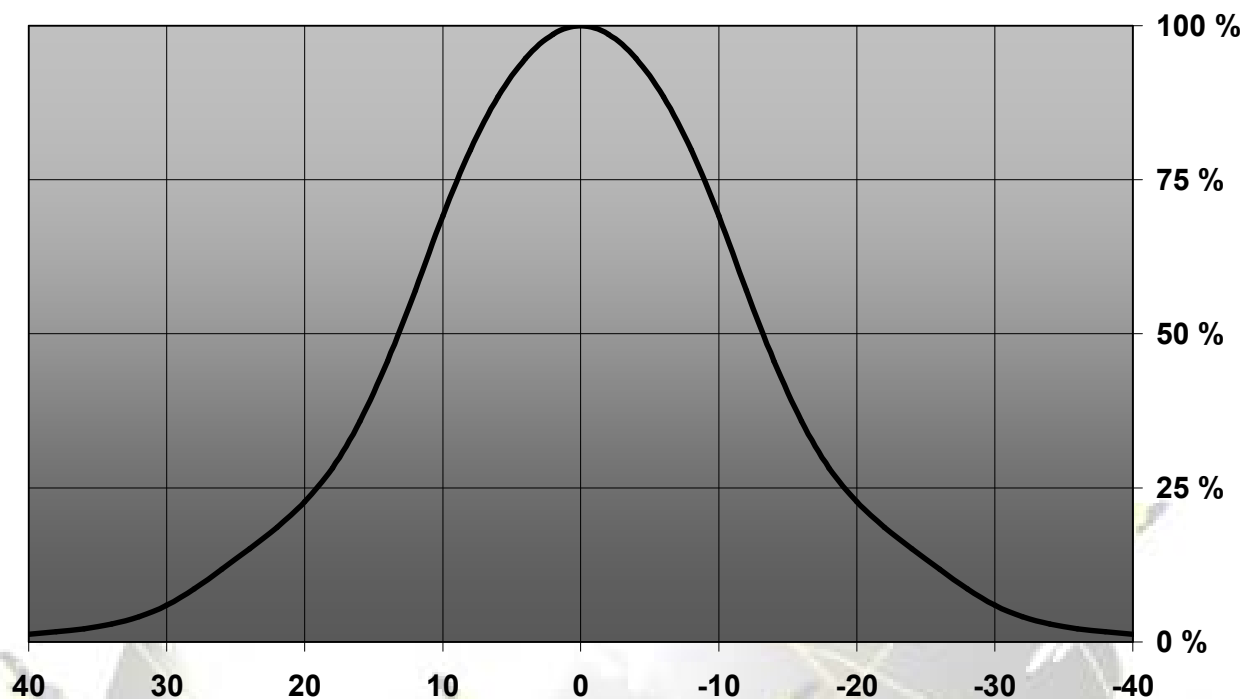



© Ledil Oy - PRELIMINARY - Subject to change without prior notice

Relative intensity of FA11127_Lisa2-O-Pin-N119

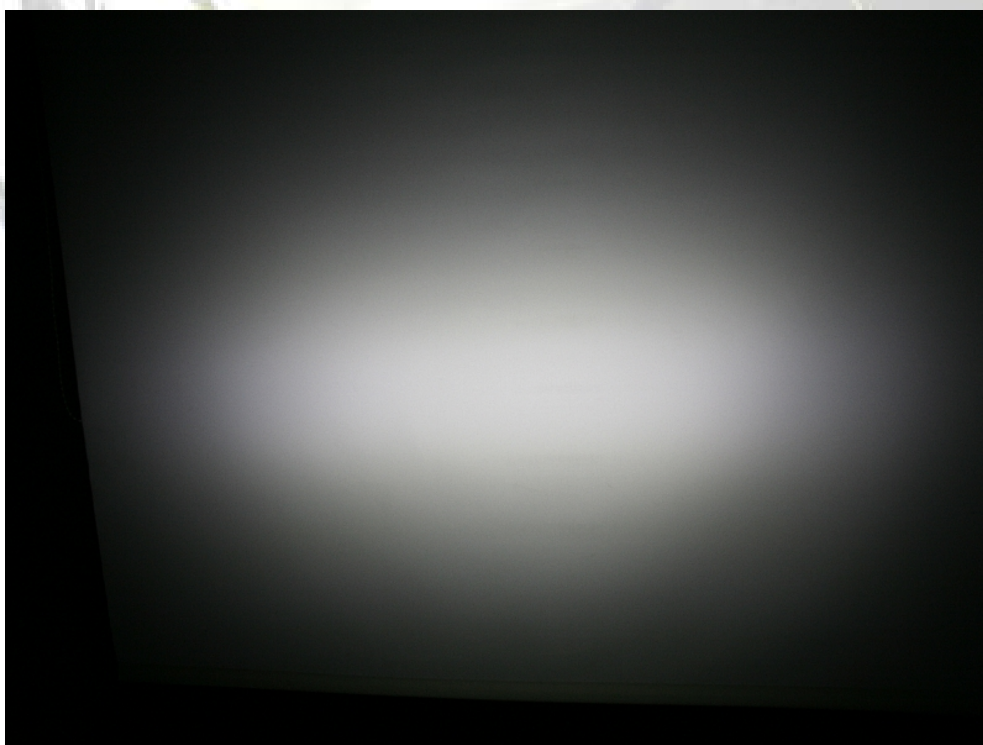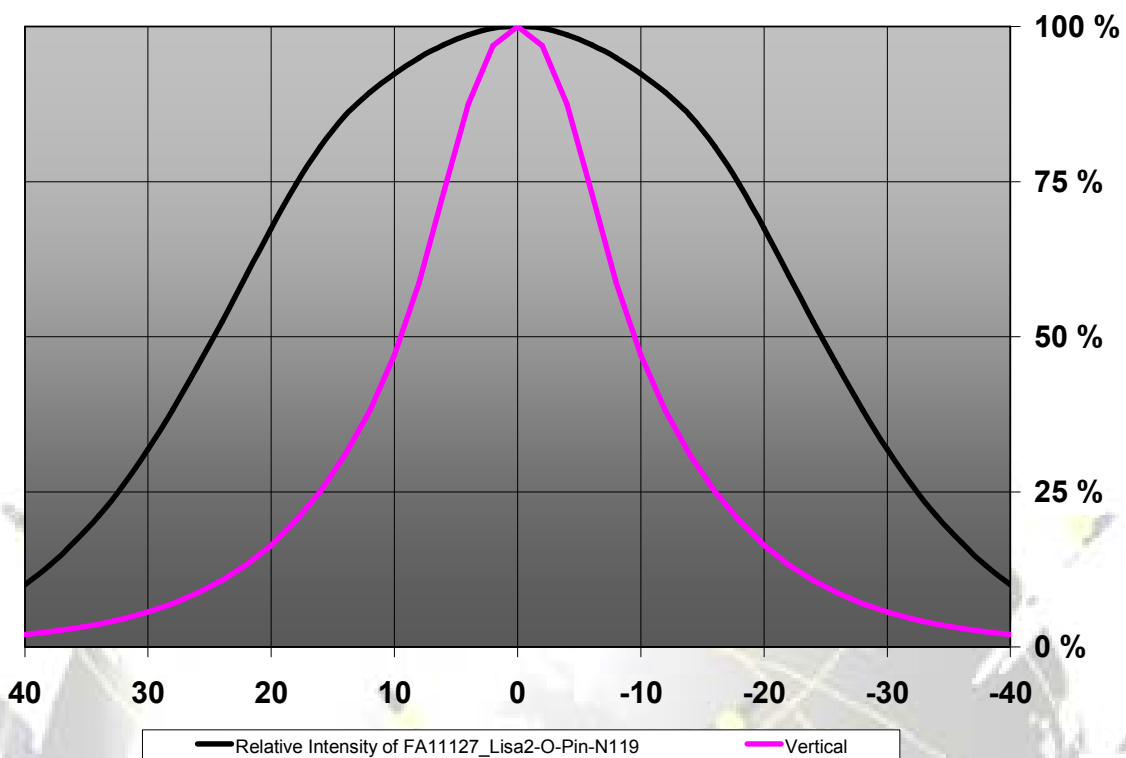


© Ledil Oy - PRELIMINARY - Subject to change without prior notice

Relative intensity of FA10999_Lisa2-W-Pin-N119

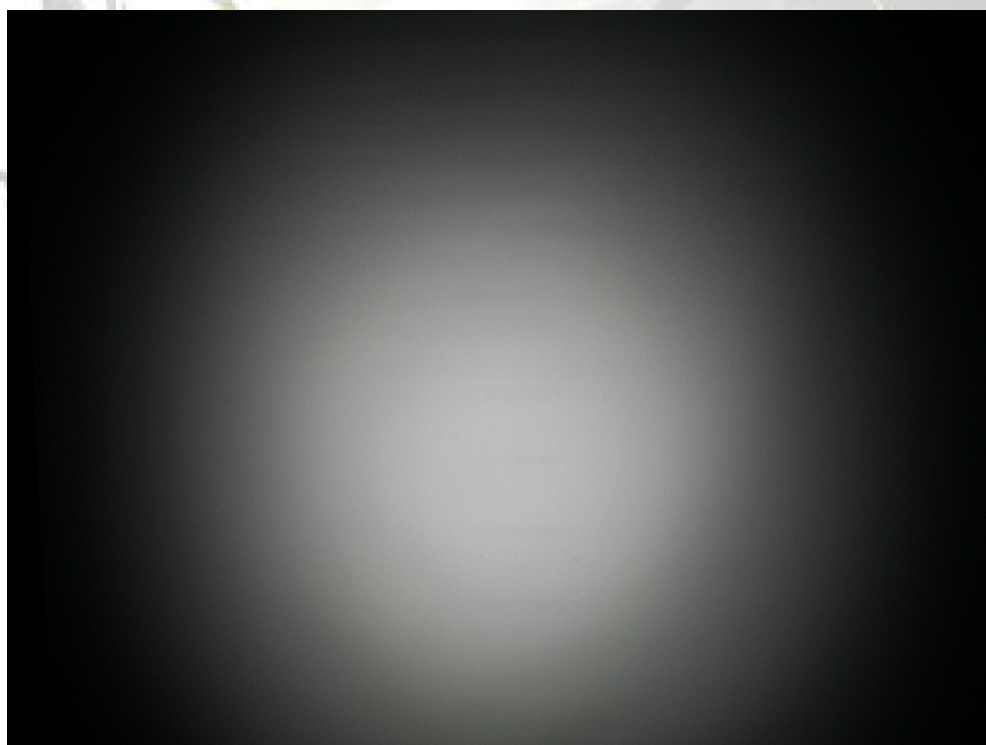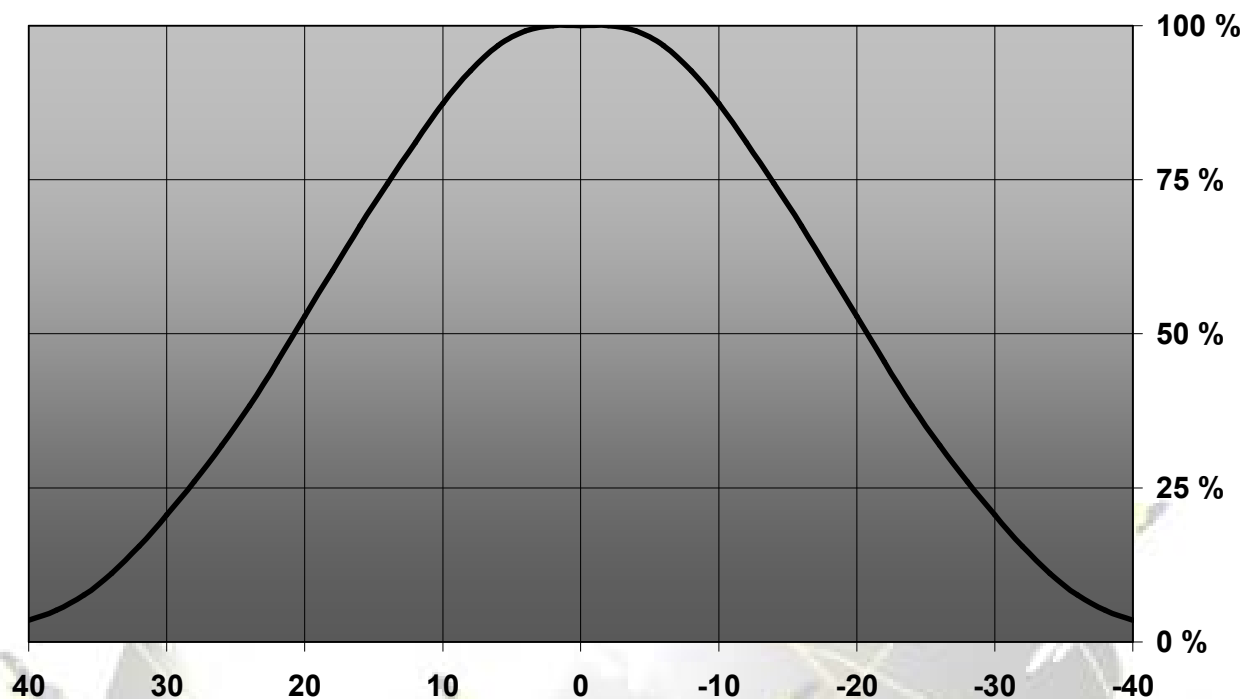

© Ledil Oy - PRELIMINARY - Subject to change without prior notice

DRAWINGS

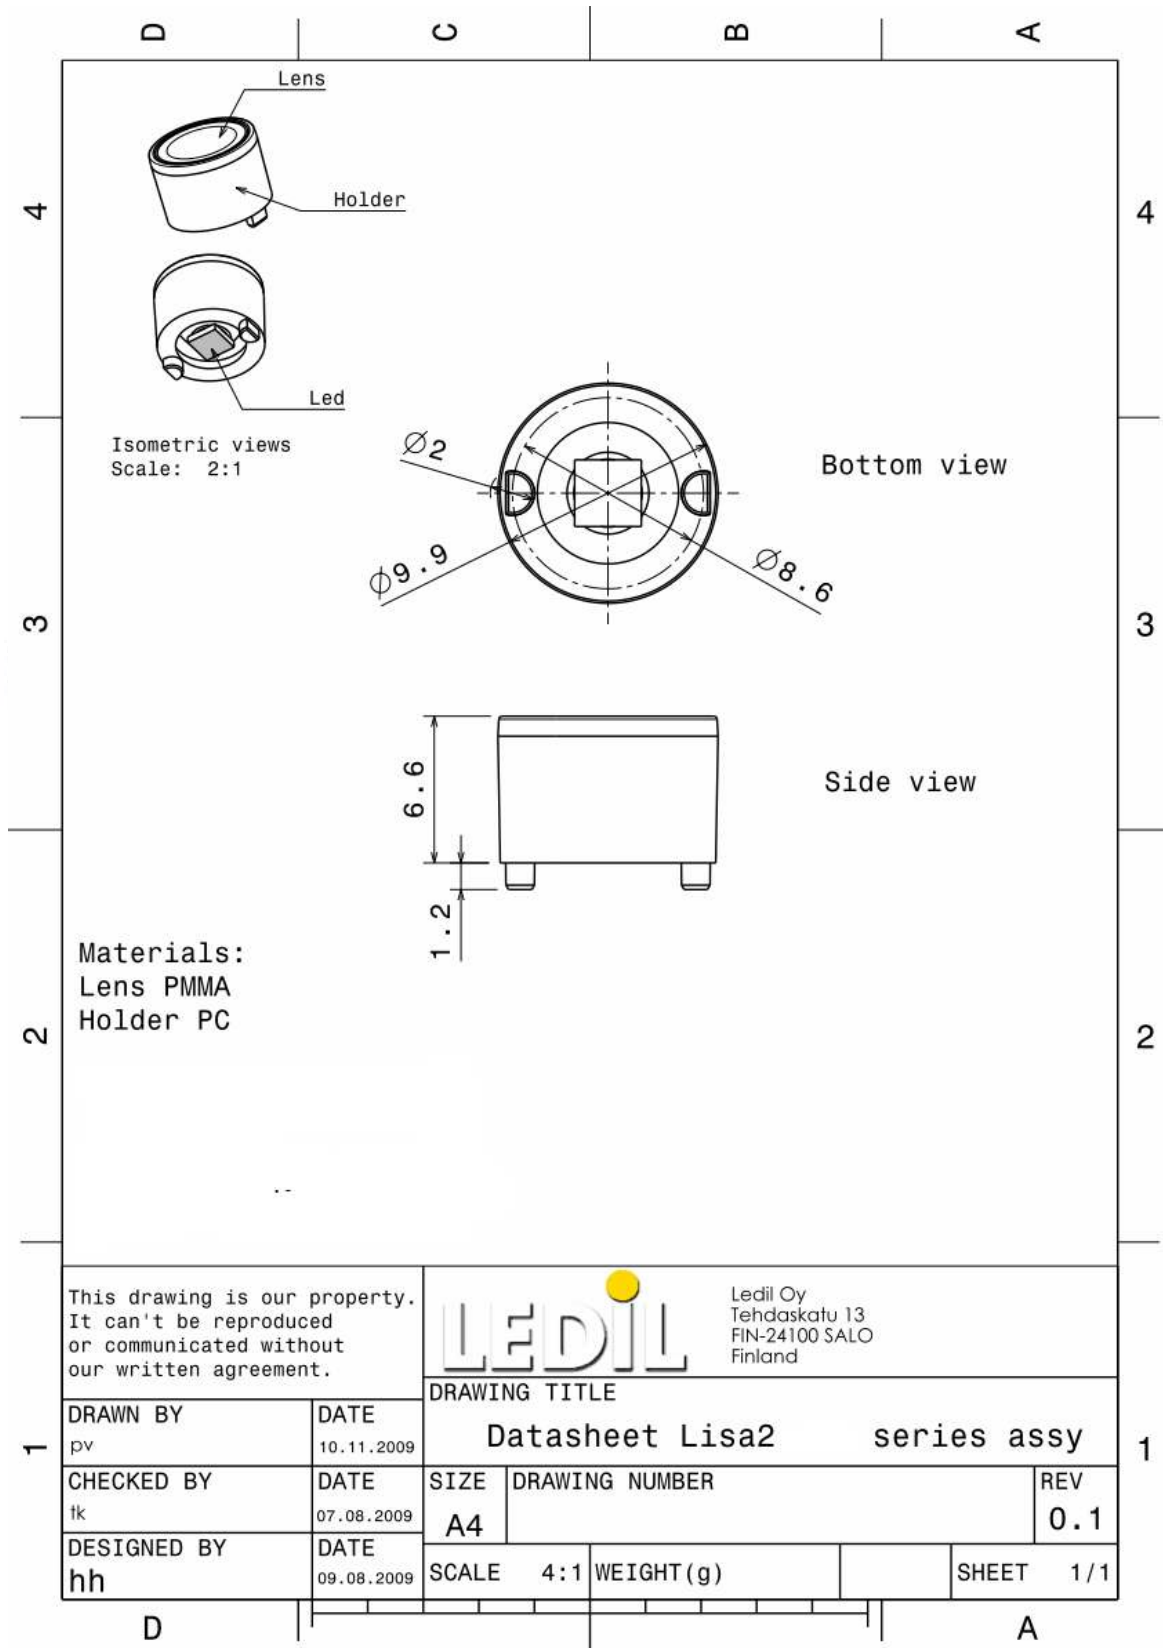

© Ledil Oy - PRELIMINARY - Subject to change without prior notice