
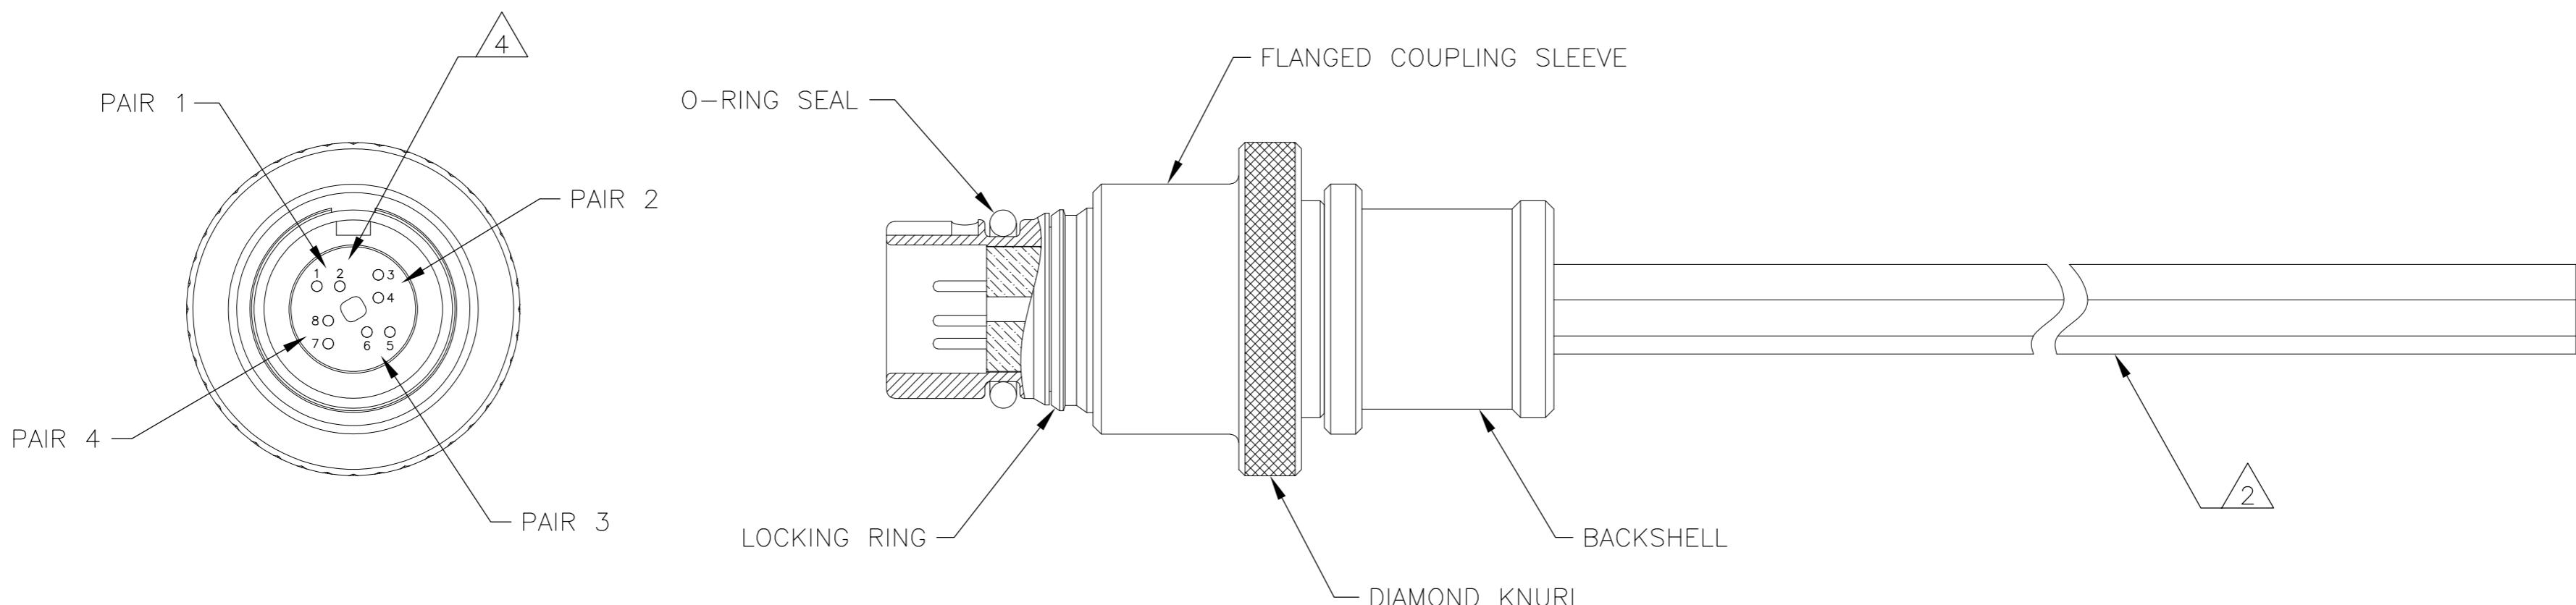


THIS DRAWING IS UNPUBLISHED.
 RELEASED FOR PUBLICATION
 - - -
 © COPYRIGHT - By -
 ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS				APVD
		P	LTR	DESCRIPTION	DATE	
	A	PRODUCTION RELEASE PER ECO-13-014747		9-18-13	CT	RL

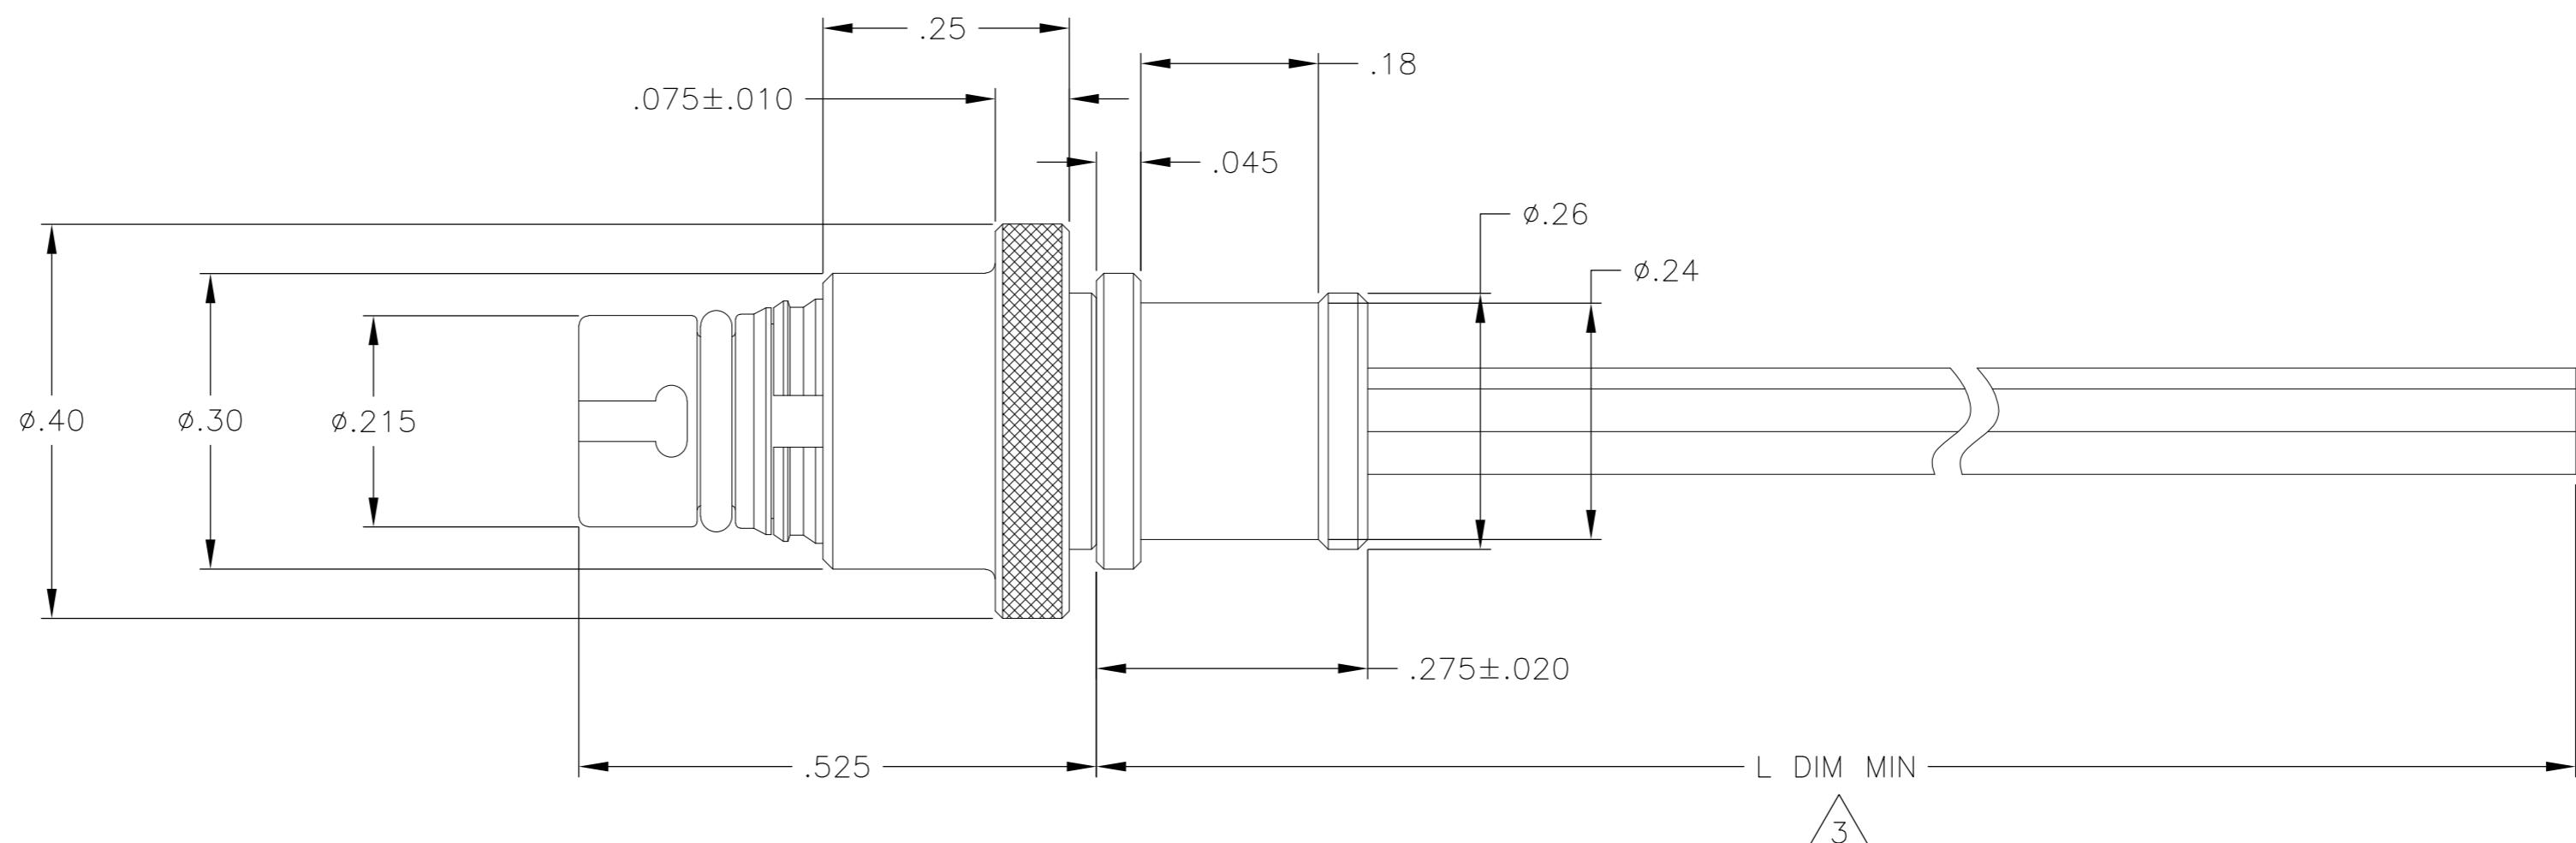

1 CONNECTOR BODY, COUPLING SLEEVE, AND BACKSHELL MATERIAL:
 6061-T6 ALUMINUM, ELECTROLESS NICKEL PLATED PER SAE-AMS-C-26074 OR SAE-AMS-2404
 LOCKING RING MATERIAL: BERYLLIUM COPPER, ELECTROLESS NICKEL PLATED PER SAE-AMS-C-26074 OR SAE-AMS-2404
 INSULATOR MATERIAL: LIQUID CRYSTAL POLYMER (LCP) PER ASTM D5138
 O-RING MATERIAL: FLUOROSILICONE PER SAE-AMS-R-25988

2 TERMINATED WITH MADISON CABLE 30 AWG 10G TURBO TWIN PAIR

3 CABLE LENGTH IS AS INDICATED IN THE CORRESPONDING NANONICS PART NUMBER

4 CAVITY POSITIONS ARE SHOWN FOR REFERENCE ONLY AND ARE NOT MARKED ON THE PART

5 BONDING RESISTANCE OF CONNECTOR BODY TO BACKSHELL SHALL BE 25 MILLIOHMS MAXIMUM

6 LUBRICATE O-RING WITH PARKER SUPER-O-LUBE PRIOR TO INSTALLATION

7 REFERENCE TE PRODUCT SPECIFICATION 108-32048 FOR PRODUCT DETAILS AND PERFORMANCE

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: INCHES	TOLERANCES UNLESS OTHERWISE SPECIFIED:	
	0 PLC	± -
1 PLC	± -	
2 PLC	± .010	
3 PLC	± .005	
4 PLC	± -	ANGLES ± 1°
MATERIAL SEE NOTES	FINISH	WEIGHT —
	SEE NOTES	
		CUSTOMER DRAWING
		SCALE 6:1
		REVIEWED
		1 OF 1
		REV A



TE Connectivity

NAME
 PLUG ASSEMBLY, CIRCULAR, QUICK DISCONNECT
 W/ FLANGED COUPLING SLEEVE, STRAIGHT BACKSHELL
 METAL, 8 POS, 10GbE, CeeLok FAS-T Nano Circular
 SIZE CAGE CODE DRAWING NO
 A2 OJPN9 C-1925255
 RESTRICTED TO