



THIS DRAWING IS UNPUBLISHED.		RELEASED FOR PUBLICATION		- , -	
(C) COPYRIGHT - By -		ALL RIGHTS RESERVED.			

LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
CM	53		AB6	REVISED PER ECR-17-006277	24MAY2017	BW	KR

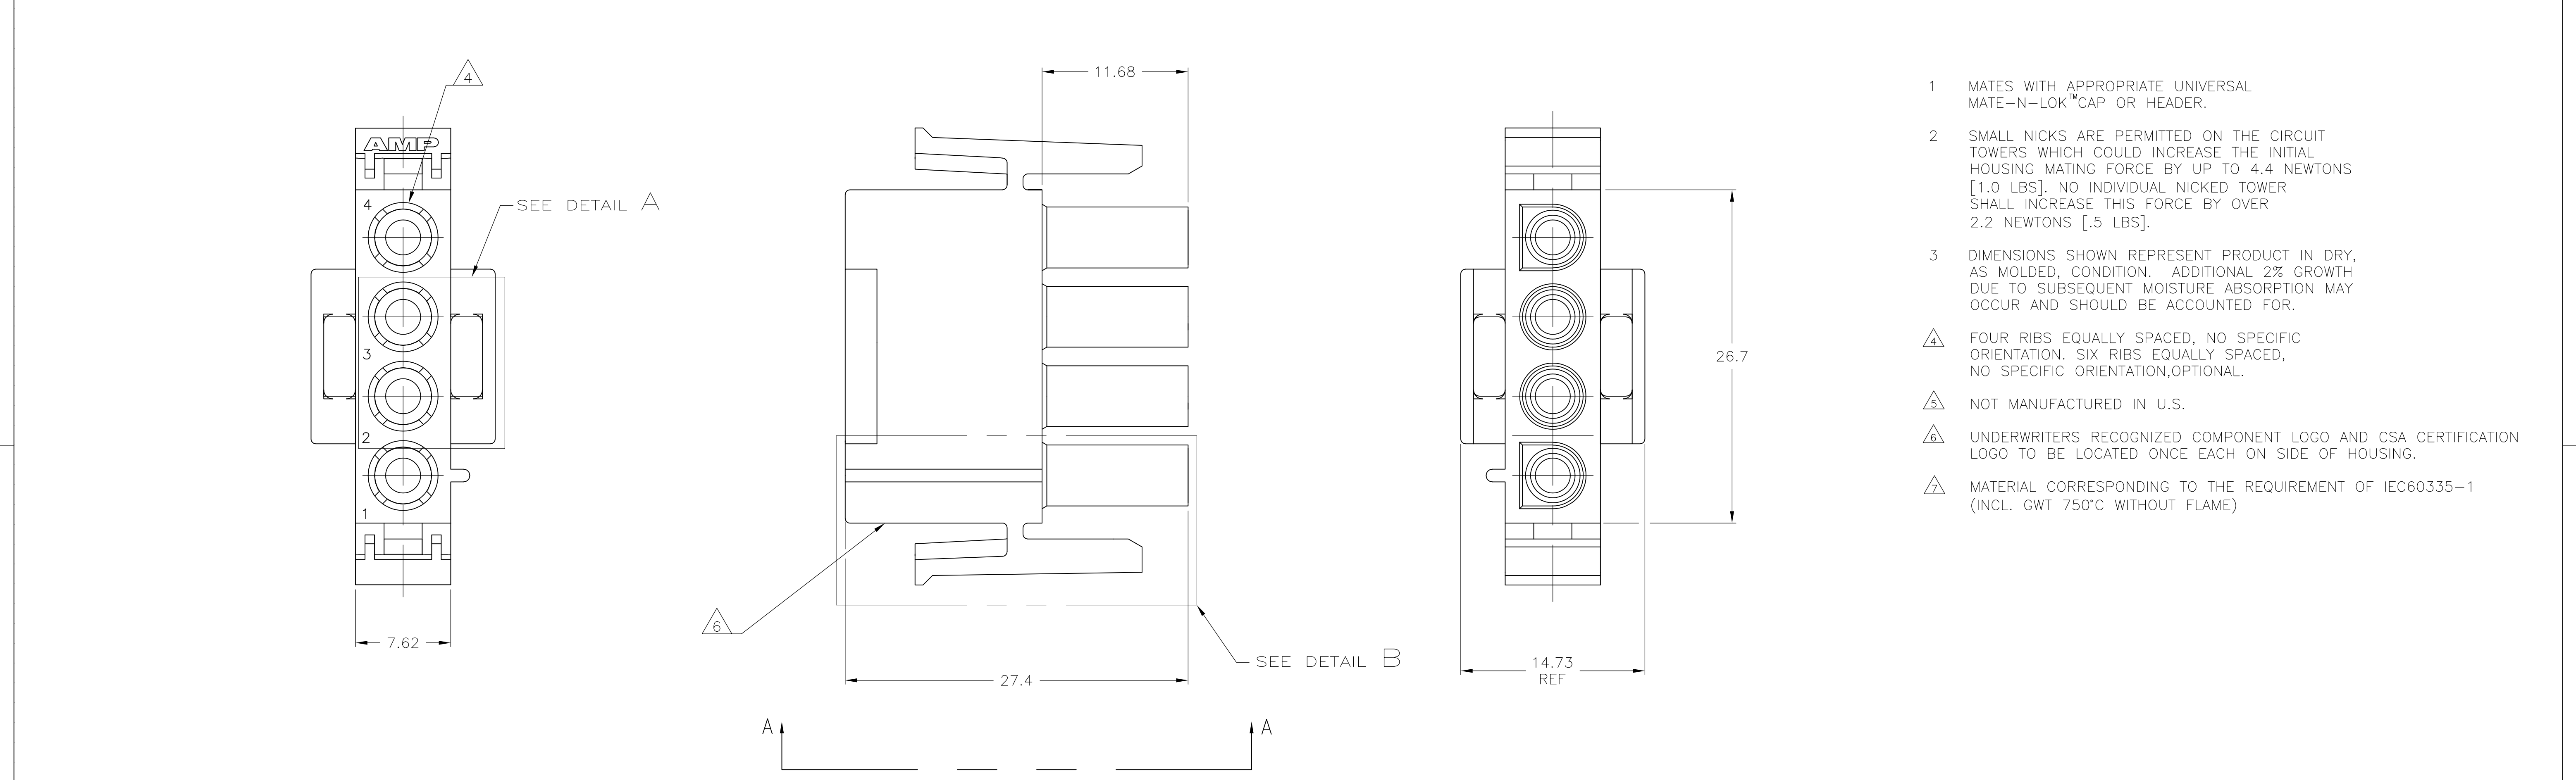

- MATES WITH APPROPRIATE UNIVERSAL MATE-N-LOK™CAP OR HEADER.
 - SMALL NICKS ARE PERMITTED ON THE CIRCUIT TOWERS WHICH COULD INCREASE THE INITIAL HOUSING MATING FORCE BY UP TO 4.4 NEWTONS [1.0 LBS]. NO INDIVIDUAL NICKED TOWER SHALL INCREASE THIS FORCE BY OVER 2.2 NEWTONS [.5 LBS].
 - DIMENSIONS SHOWN REPRESENT PRODUCT IN DRY, AS MOLDED, CONDITION. ADDITIONAL 2% GROWTH DUE TO SUBSEQUENT MOISTURE ABSORPTION MAY OCCUR AND SHOULD BE ACCOUNTED FOR.
- △4 FOUR RIBS EQUALLY SPACED, NO SPECIFIC ORIENTATION. SIX RIBS EQUALLY SPACED, NO SPECIFIC ORIENTATION,OPTIONAL.
- △5 NOT MANUFACTURED IN U.S.
- △6 UNDERWRITERS RECOGNIZED COMPONENT LOGO AND CSA CERTIFICATION LOGO TO BE LOCATED ONCE EACH ON SIDE OF HOUSING.
- △7 MATERIAL CORRESPONDING TO THE REQUIREMENT OF IEC60335-1 (INCL. GWT 750°C WITHOUT FLAME)

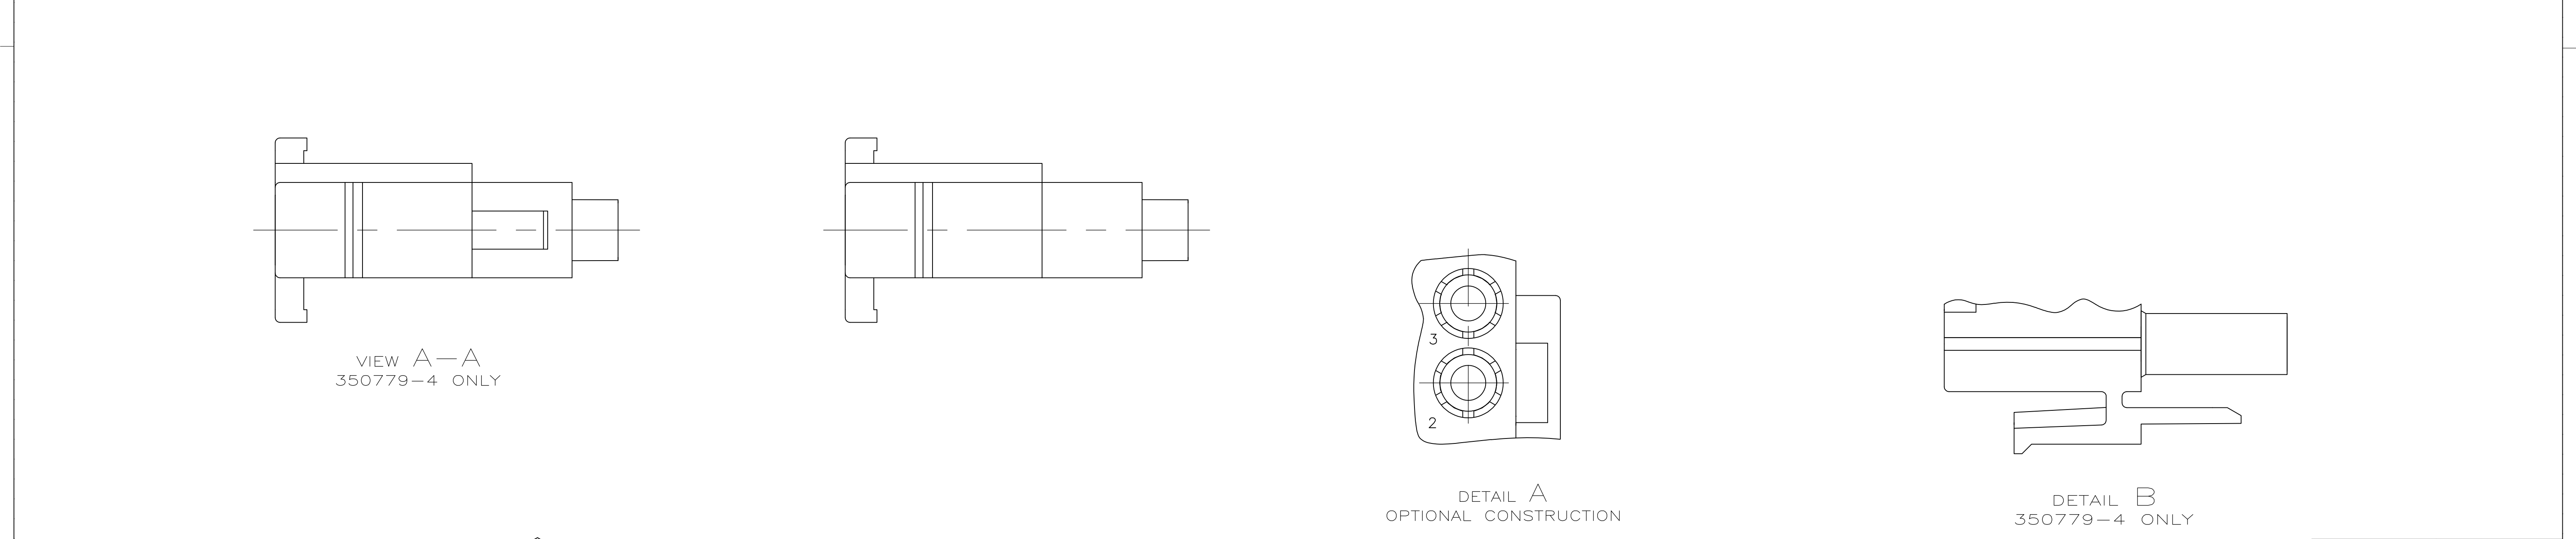

350779-4 3-DIMENSIONAL MODEL NTS

3-DIMENSIONAL MODEL NTS

△ NATURAL	350779-5
BLACK	1-350779-9
GRAY	1-350779-8
BLUE	1-350779-6
GREEN	1-350779-5
YELLOW	1-350779-4
ORANGE	1-350779-3
RED	1-350779-2
BROWN	1-350779-1
△	350779-4
NATURAL	350779-1
COLOR	PART NO.

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC ± -

1 PLC ± 0.4

2 PLC ± 0.20

3 PLC ± -

4 PLC ± -

ANGLES ± ± 0°30'

FINISH -

DWN R VESTAL 03FEB95

CHK R SWING 03FEB95

APVD D SELF 03FEB95

PRODUCT SPEC

APPLICATION SPEC

WEIGHT

NAME

SIZE CAGE CODE DRAWING NO

RESTRICTED TO

TE Connectivity

PLUG, 4 CIRCUIT, UNIVERSAL MATE-N-LOK™

—

A100779

350779

CUSTOMER DRAWING

SCALE 4:1

SHEET 1 OF 1

REV AB6