
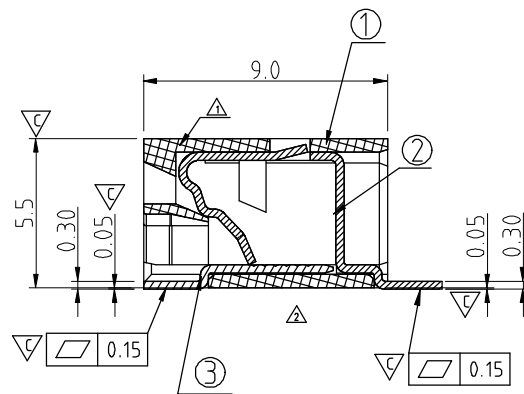


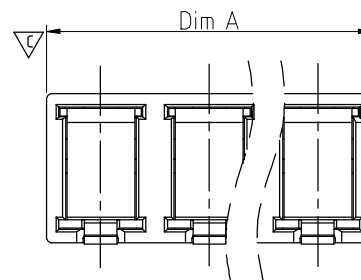

Dim.A	$N \times 4.0$
Dim.B	$(N-1) \times 4.0$

△	POLES	TOLERANCE
	2P - 3P	-0.20/+0.20

THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!

- ⚠ Item 1 Terminal housing:LCP (UL94 V-0)
- Item 2 Long solder pin: Copper alloy, Matte Tin plated(high temperature)
- Item 3 Short solder pin: Brass ,Matte Tin plated(high temperature)

- Voltage rating: 300VAC 300VAC
- Current rating: 9A 5A
- Wire range:
- Solid wire(AWG): 18-24
- Tin Dipped Stranded wire(AWG): 18-24
- Wire strip length: 6-7mm
- Withstanding Voltage: 1.6KV
- Operating temperature: -45°C to +130°C
- Reflow soldering temperature: 260°C/10
- Safety Approval:  

NQ xx 2 1 x 0 xxxx G

02: 2 POLES
03: 3 POLES

0 Black (RAL9005)
1 Natural color
8 Grey

0000: "@ Logo (Standard)
000A: "ANYTEK" Mark
Any special item by
customer request.
please contact sales
department.

ANYTEK

CUSTOMER COPY

ALL RIGHTS RESERVED. REPRODUCTION OR ISSUE TO THIRD PARTIES IN ANY FORM WHATEVER IS NOT PERMITTED WITHOUT WRITTEN AUTHORITY FROM THE PROPRIETOR. PROPERTY OF ANYTEK TECHNOLOGY CO., LTD

TITLE	NQ 4.0mm Series (SMT)						
PART NO.	NQxx21x0xxxxG				DWG NO.	8NQ0101	
APPROVED	CHECKED	DESIGNED	DRAWN	CUST NO.			Tolerance
		Airy min 2015/03/27	Airy min 2015/03/27		UNIT:	mm	X. ±0.50
					SCALE:	NONE	X.XX ±0.30
				SHEET: 01/01	REV:	C	X° ±1°