
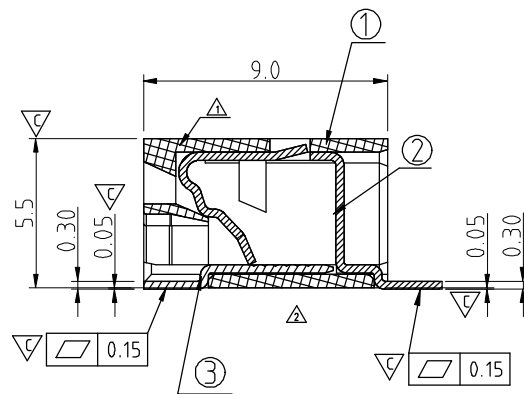


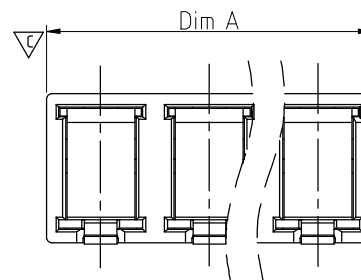

Dim.A	$N \times 4.0$
Dim.B	$(N-1) \times 4.0$

△	POLES	TOLERANCE
	2P - 3P	-0.20/+0.20

SIGN	DATE	DESCRIPTION	APPROVER
	03/27'13	Update the drawing	Jacky
	08/01'13	Change the view	Jacky
	12/23'13	Remove the stranded wire	Jacky
	03/27'15	Update the drawing	Airy min
	03/27'15	Add the safety certification icon	Airy min

THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!

- Item 1 Terminal housing:LCP (UL94V-0)
- Item 2 Long solder pin: Copper alloy, Matte Tin plated(high temperature)
- Item 3 Short solder pin: Brass, Matte Tin plated(high temperature)

 Electrical UL /cULus (UL1977Standard)

- Voltage rating: 300VAC 300VAC
- Current rating: 9A 5A
- Wire range:
- Solid wire(AWG): 18-24
- Tin Dipped Stranded wire(AWG): 18-24
- Wire strip length: 6-7mm
- Withstanding Voltage: 1.6KV
- Operating temperature: -45°C to +130°C
- Reflow soldering temperature: 260°C/10 Sec Max.
- Safety Approval:  

- Critical dimension: ∇C

NQ xx 2 1 x 0 xxxx G

Δ No. OF POLES

02: 2 POLES

03: 3 POLES

— G RoHS compliant
(lead<4%)
In copper Alloy

$\triangle_4$ color

0 Black (RAL9005)

1 Natural color

8 Grey

— 0000: "@ " Logo (Standard)

000A: "ANYTEK" Mark

Any special item by
customer request.
please contact sales
department.

ANYTEK

CUSTOMER COPY

ALL RIGHTS RESERVED. REPRODUCTION OR ISSUE TO THIRD PARTIES IN ANY FORM WHATEVER IS NOT PERMITTED WITHOUT WRITTEN AUTHORITY FROM THE PROPRIETOR. PROPERTY OF ANYTEK TECHNOLOGY CO., LTD

TITLE		NQ 4.0mm Series (SMT)							
PART NO.		NQxx21x0xxxxG			DWG NO.	8NQ0101			
APPROVED	CHECKED	DESIGNED	DRAWN	CUST NO.				Tolerance	
		Airy min 2015/03/27	Airy min 2015/03/27			UNIT: mm	X.	±0.50	
						SCALE: NONE	X.X	±0.30	
				SHEET: 01/01		REV: C	X°	±1°	