


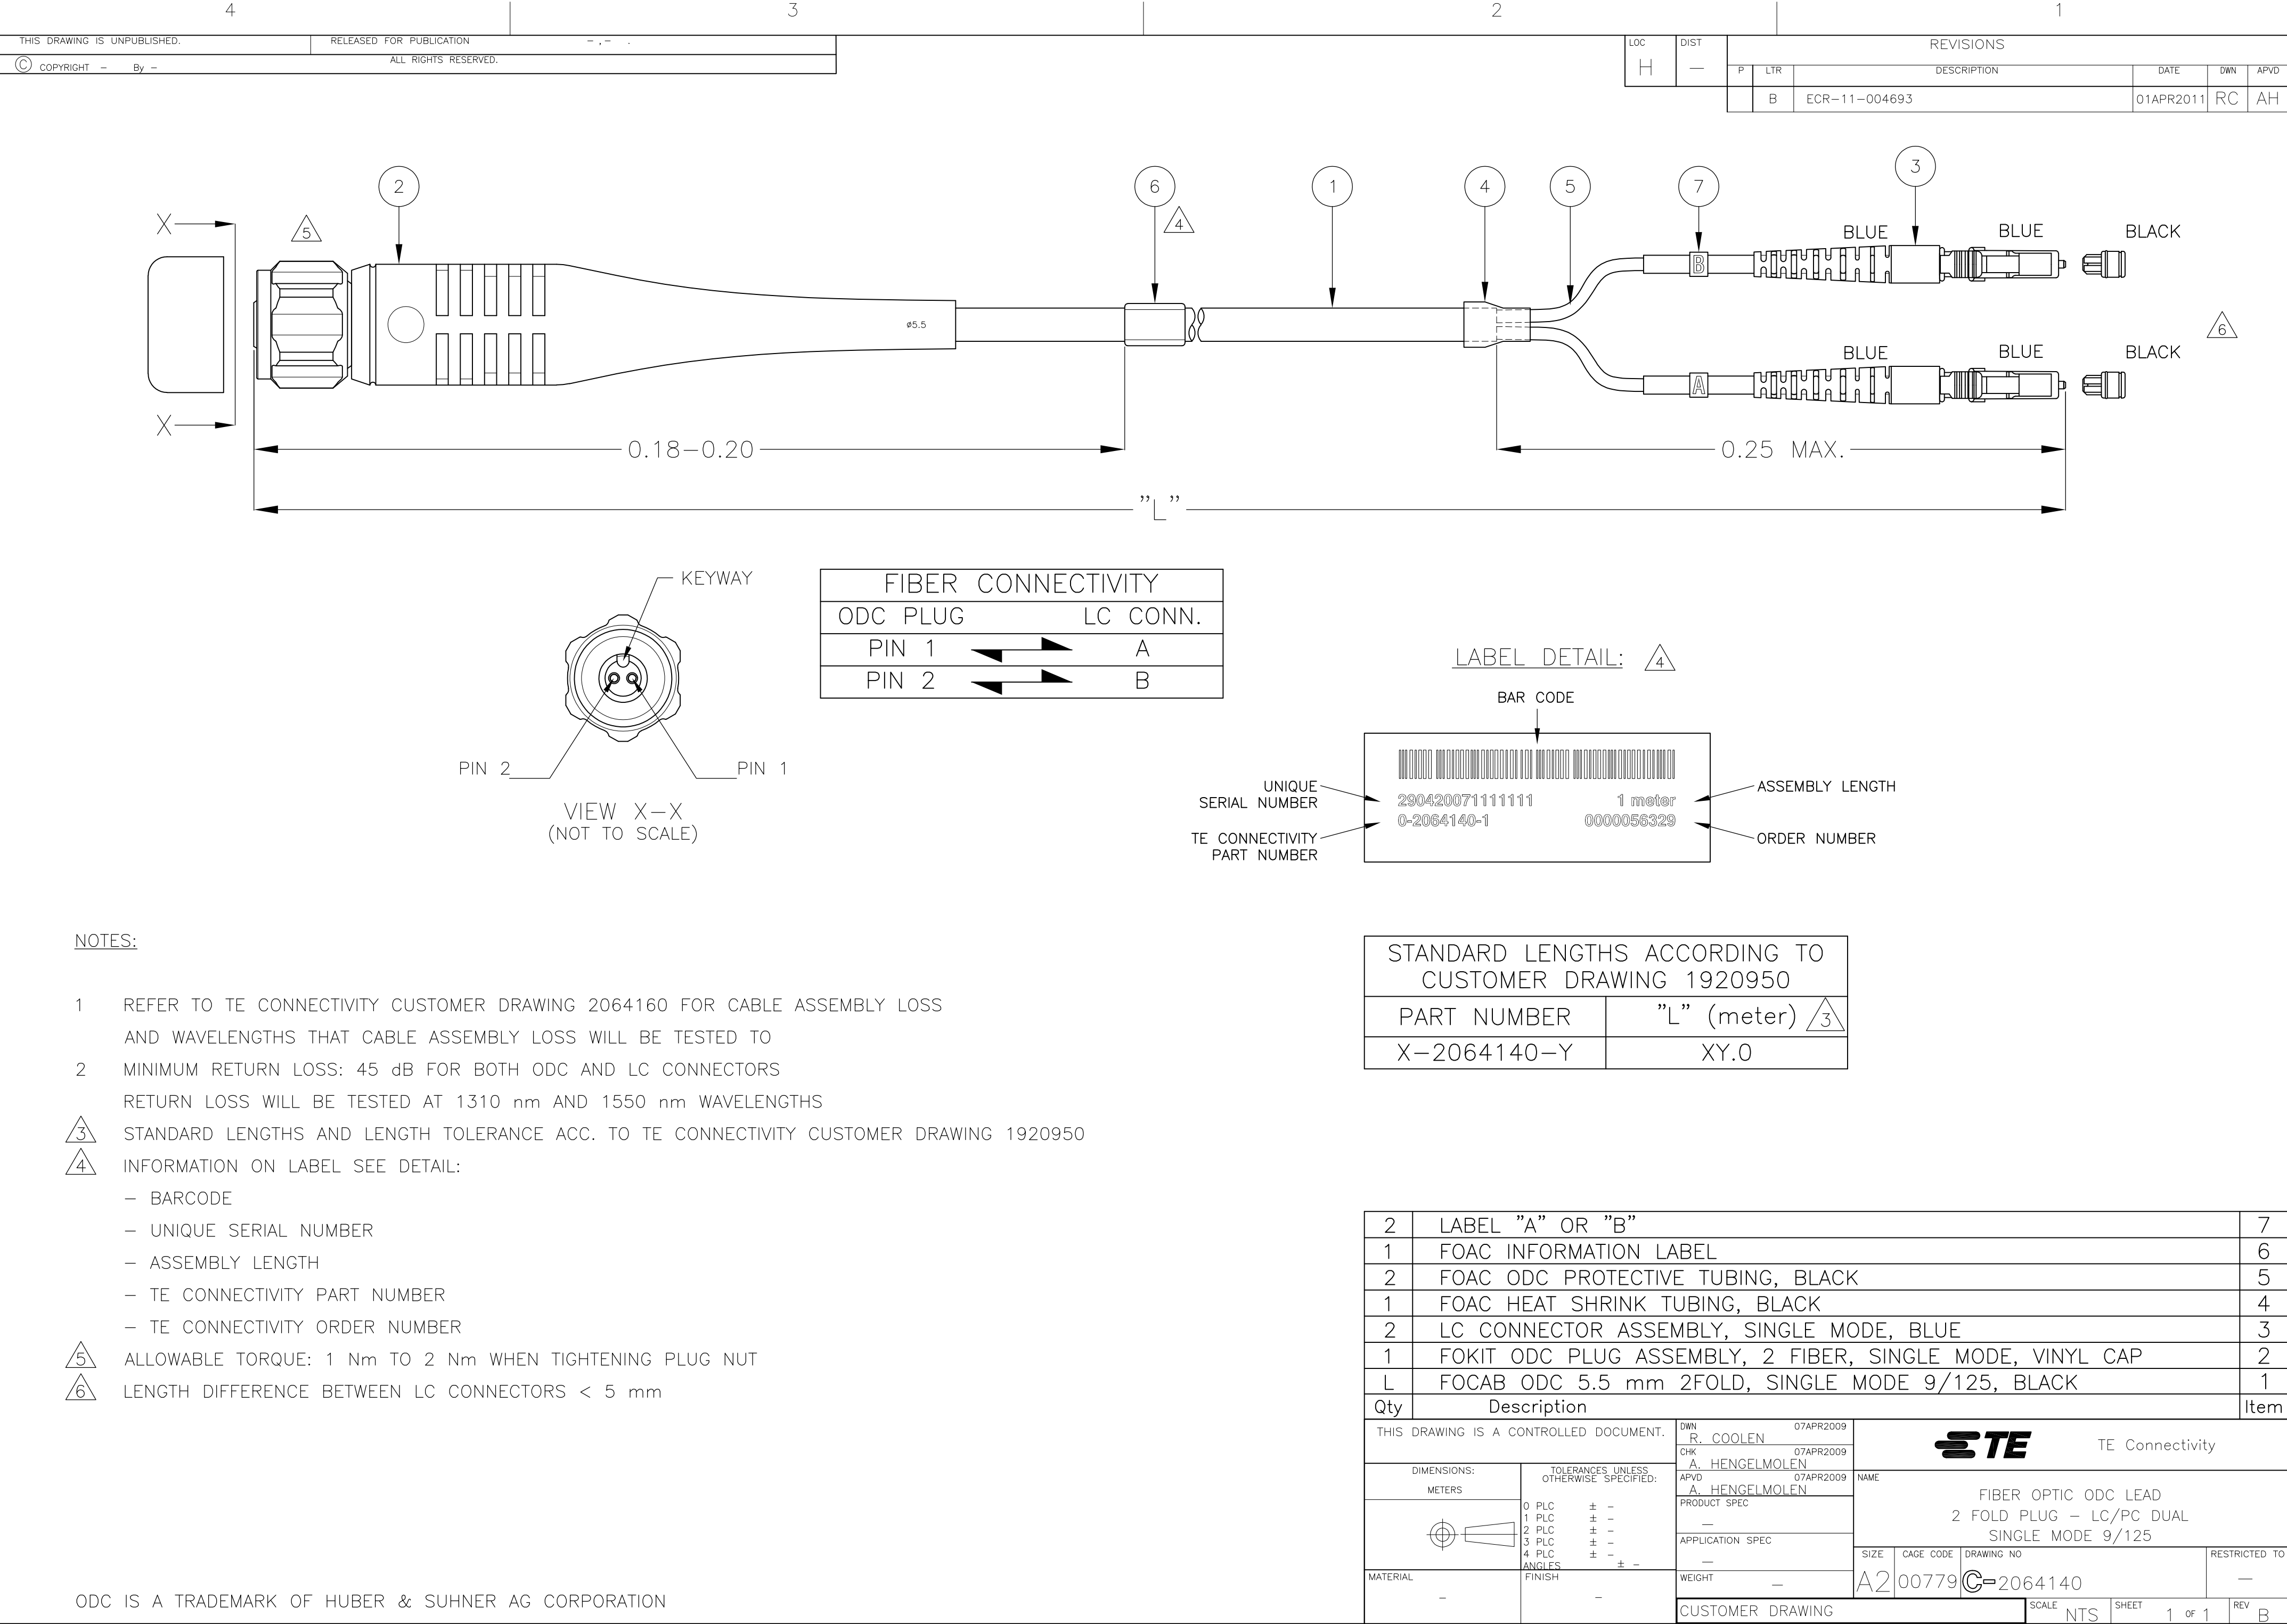

2

6

1

4

5

7

3

5

4

6

X

X

ø5.5

0.18-0.20

0.25 MAX.

ODC PLUG

LC CONN.

PIN 1

PIN 2

KEYWAY

PIN 2

PIN 1

VIEW X-X
(NOT TO SCALE)

FIBER CONNECTIVITY

ODC PLUG	LC CONN.
PIN 1	A
PIN 2	B

LABEL DETAIL:

BAR CODE

UNIQUE SERIAL NUMBER

290420071111111

0-2064140-1

ASSEMBLY LENGTH

1 meter

0000056329

TE CONNECTIVITY PART NUMBER

ORDER NUMBER

NOTES:

1

REFER TO TE CONNECTIVITY CUSTOMER DRAWING 2064160 FOR CABLE ASSEMBLY LOSS AND WAVELENGTHS THAT CABLE ASSEMBLY LOSS WILL BE TESTED TO

2

MINIMUM RETURN LOSS: 45 dB FOR BOTH ODC AND LC CONNECTORS

RETURN LOSS WILL BE TESTED AT 1310 nm AND 1550 nm WAVELENGTHS

3

STANDARD LENGTHS AND LENGTH TOLERANCE ACC. TO TE CONNECTIVITY CUSTOMER DRAWING 1920950

4

INFORMATION ON LABEL SEE DETAIL:

- BARCODE

- UNIQUE SERIAL NUMBER

- ASSEMBLY LENGTH

- TE CONNECTIVITY PART NUMBER

- TE CONNECTIVITY ORDER NUMBER

5

ALLOWABLE TORQUE: 1 Nm TO 2 Nm WHEN TIGHTENING PLUG NUT

6

LENGTH DIFFERENCE BETWEEN LC CONNECTORS < 5 mm

STANDARD LENGTHS ACCORDING TO CUSTOMER DRAWING 1920950

PART NUMBER	"L" (meter)
X-2064140-Y	XY.0

2	LABEL "A" OR "B"	7
1	FOAC INFORMATION LABEL	6
2	FOAC ODC PROTECTIVE TUBING, BLACK	5
1	FOAC HEAT SHRINK TUBING, BLACK	4
2	LC CONNECTOR ASSEMBLY, SINGLE MODE, BLUE	3
1	FOKIT ODC PLUG ASSEMBLY, 2 FIBER, SINGLE MODE, VINYL CAP	2
L	FOCAB ODC 5.5 mm 2FOLD, SINGLE MODE 9/125, BLACK	1
Qty	Description	Item

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN

R. COOLEN

07APR2009

CHK

A. HENGELMOLEN

07APR2009

APVD

A. HENGELMOLEN

07APR2009

DIMENSIONS:

METERS

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC	± -
1 PLC	± -
2 PLC	± -
3 PLC	± -
4 PLC	± -
ANGLES	± -

MATERIAL

-

FINISH

-

WEIGHT

-

CUSTOMER DRAWING

SCALE

NTS

SHEET

1 of 1

REV

B

TE Connectivity

FIBER OPTIC ODC LEAD

2 FOLD PLUG - LC/PC DUAL

SINGLE MODE 9/125

SIZE

A2

CAGE CODE

00779

DRAWING NO

C-2064140

RESTRICTED TO

-

ODC IS A TRADEMARK OF HUBER & SUHNER AG CORPORATION

1471-9 (3/11)