


THIS IS ISSUED IN STRICT CONFIDENCE THAT IT IS NOT USED AS A BASIS FOR MANUFACTURE OR SALE AND THAT IT IS NOT COPIED, REPRINTED OR DISCLOSED TO A THIRD PARTY EITHER WHOLLY OR IN PART WITHOUT THE PRIOR WRITTEN CONSENT OF CAL TEST ELECTRONICS, INC.

- DO-IT-YOURSELF (DIY) 4mm IN-LINE JACK, SCREW ATTACHMENT.
- SPECIFICATIONS:
INSULATOR BODY: POLYAMIDE (NYLON)
JACK BODY: BRASS, NICKEL PLATED
- RATING:
VOLTAGE: 1,200V AC/DC
CURRENT: 36A MAX.
TEMPERATURE: -20° C TO +80° C.
- MAXIMUM WIRE SIZES:
CONDUCTOR: Ø.090 (12AWG)
STRIP LENGTH: .25 (6.4)

PART NUMBER

CT2215-#


COLOR: 0 - BLACK
2 - RED
4 - YELLOW
5 - GREEN
6 - BLUE
9 - WHITE

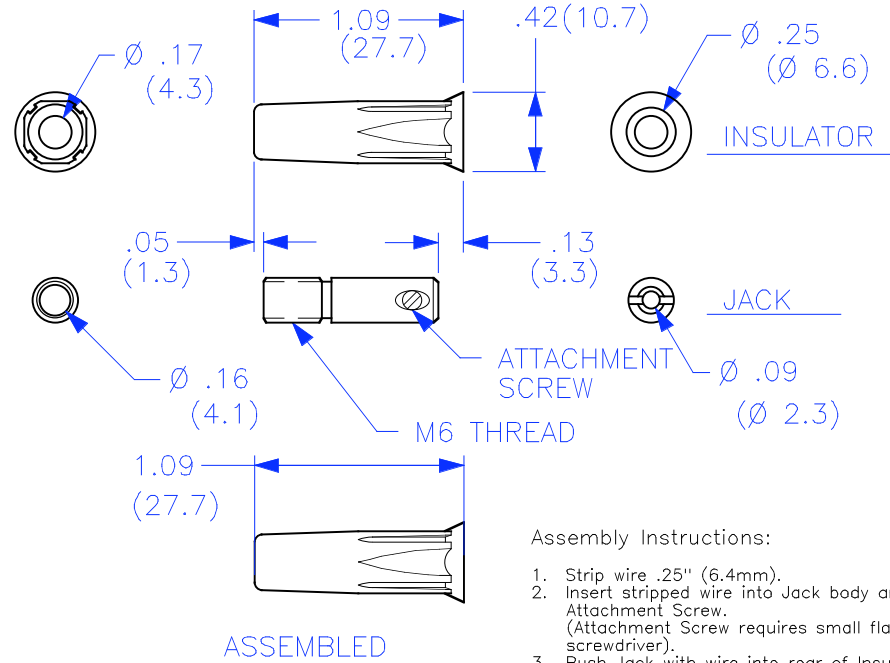

Assembly Instructions:

- Strip wire .25" (6.4mm).
- Insert stripped wire into Jack body and tighten Attachment Screw. (Attachment Screw requires small flat blade screwdriver).
- Push Jack with wire into rear of Insulator housing and thread.
- Using same small screwdriver, engage Jack slots through rear of Insulator and snug Jack into Insulator housing.

THIRD ANGLE PROJECTION



UNLESS OTHERWISE SPECIFIED
DIMENSIONS ARE IN INCHES
TOLERANCES ARE:
FRACTIONS DECIMALS
± 1/32 .XX ± .02
DO NOT SCALE DRAWING .XXX ± .005

MATERIAL

FINISH

CONTRACT NO.

APPROVALS

DATE

DRAWN WDH

7/11/99

CHECKED

ENGR.

DESIGN ACTIVITY

Cal Test Electronics

22820 Savi Ranch Parkway
Yorba Linda, CA 92887-4610

TITLE

DIY 4mm JACK, SCREW

SIZE
A

CAGE CODE
43F45

DWG. NO.

P221500

REV.

—

SCALE **1:1**

SHEET **1 OF 1**

NEXT ASSY

USED ON

APPLICATION