

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number:

0755860104

Status:

Active

Overview:

iPass™ Connector System

Description:

0.80mm Pitch, iPass™ I/O Surface Mount Receptacle, Right Angle, External Application, 38 Circuit, 0.76µm Gold (Au)

Documents:

3D Model

Drawing (PDF)

Product Specification PS-75586-001 (PDF)

Application Specification AS-75586-001 (PDF)

RoHS Certificate of Compliance (PDF)

Agency Certification

CSA

LR19980

UL

E29179

General

Product Family

I/O Connectors

Series

75586

Application

Wire-to-Board

Component Type

Receptacle

Electrical Model

Yes

Overview

iPass™ Connector System

Product Name

iPass™, Mini Multi-Lane, PCI Express*

Type

N/A

UPC

800756909219

Physical

Boot Color

N/A

Circuits (Loaded)

38

Circuits (maximum)

38

Color - Resin

Black

Durability (mating cycles max)

250

Flammability

94V-0

Gender

Female

Keying to Mating Part

None

Lock to Mating Part

None

Material - Metal

Copper-Nickel-Zinc, High Performance Alloy (HPA)

Material - Plating Mating

Gold

Material - Plating Termination

Tin

Material - Resin

High Temperature Thermoplastic

Net Weight

0.991/g

Number of Rows

2

Orientation

Right Angle

PCB Locator

Yes

PCB Retention

None

PCB Thickness - Recommended

1.35mm

Packaging Type

Embossed Tape on Reel

Panel Mount

No

Pitch - Mating Interface

0.80mm

Pitch - Termination Interface

0.80mm

Plating min - Mating

0.762µm

Plating min - Termination

2.540µm

Polarized to Mating Part

Yes

Polarized to PCB

Yes

Ports


1

Surface Mount Compatible (SMC)

Yes

Temperature Range - Operating

-40°C to +80°C

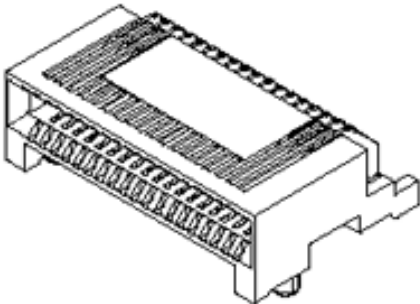

Series image - Reference only

EU ELV

Not Relevant

EU RoHS

Compliant

China RoHS

REACH SVHC

Contains SVHC(2014 December 17): No

Halogen-Free

Status

Low-Halogen

Need more information on product environmental compliance?

Email productcompliance@molex.com
Please visit the [Contact Us](#) section for any non-product compliance questions.

China ROHS

Green Image

ELV

Not Relevant

Search Parts in this Series

[75586](#) Series

Mates With

[74547](#) iPass™ Cable Assembly

Use With

[74548](#) I/O Connectors

Termination Interface: Style	Surface Mount
Waterproof / Dustproof	No
Wire Insulation Diameter	N/A
Wire Size AWG	N/A
Electrical	
Current - Maximum per Contact	0.5A
Grounding to Panel	N/A
Shielded	No
Voltage - Maximum	30V AC (RMS)/DC
Solder Process Data	
Duration at Max. Process Temperature (seconds)	020
Lead-freeProcess Capability	REFLOW
Max. Cycles at Max. Process Temperature	001
Process Temperature max. C	260
Material Info	
Reference - Drawing Numbers	
Application Specification	AS-75586-001
Electrical Model Document	EE-75586-001
Product Specification	PS-75586-001
S-Parameter Model	SP-75586-001
Sales Drawing	SD-75586-005
Signal Integrity Report	SI-75586-0001

This document was generated on 06/22/2015

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION