


## **Cable Assembly**

172-181142-E

Date Last Revised: 3/26/19

**DIMENSIONS: mm** 

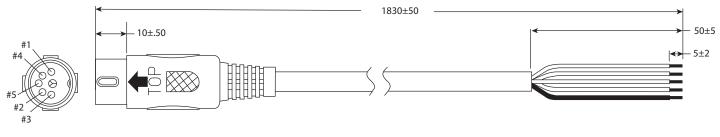

"P1"

"P2"

CONNECTION		
P1	WIRE COLOR	P2
1	YELLOW	TIN
2	BRAID	TIN
3	RED	TIN
4	WHITE	TIN
5	BLUE	TIN

## **Specifications:**

- Operating Temperature: -20°C ± 70°C
- Insulation Resistance: DC/300V 5MΩ MIN.
- Withstand Voltage: AC/300V 5mA For One Minute.
- Continuity Resistance: 5Ω MAX.
- Continuity Test: 100%
- Tensile Strength: Overmold to cable jacket shall withstand 5kgf pull min. for one minute.

## Notes:

· RoHS Compliant