

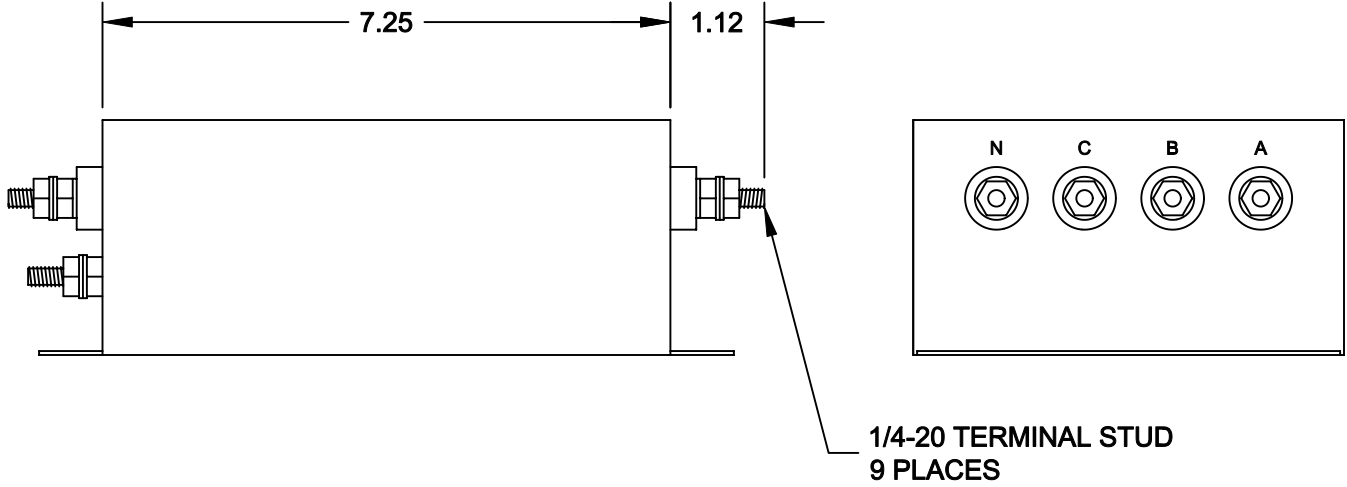
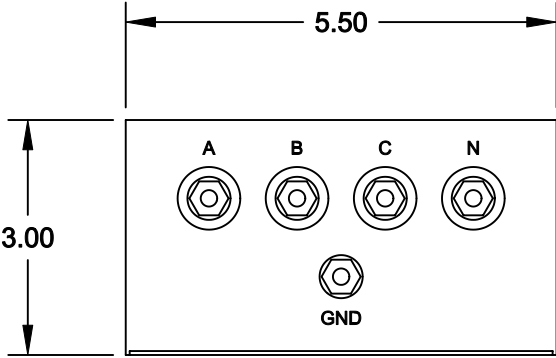


SPECIFICATIONS

1. CASE:
18 GA. (.048) CRS, TIN PLATED
2. RATED CURRENT:
3 x 35A
3. RATED VOLTAGE:
125/220VAC, 400Hz
4. TEST VOLTAGE:
LINE TO NEUTRAL: 1.7KVDC
LINE TO GROUND: 2.2KVDC
5. LEAKAGE CURRENT:
6.2mA MAX. @ 125VAC, 400Hz

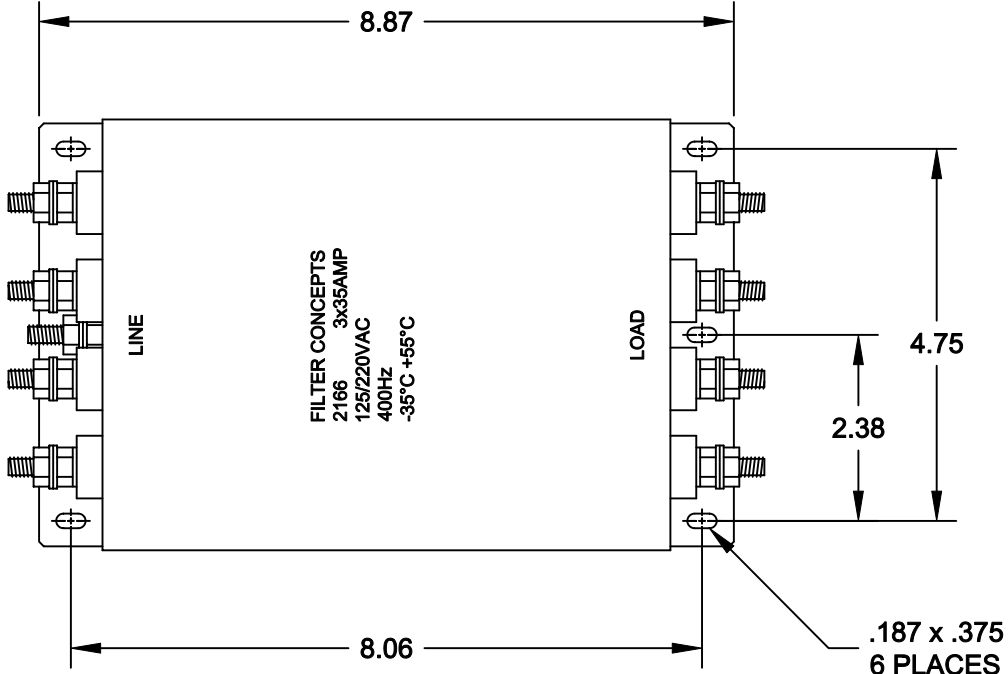

SCHEMATIC

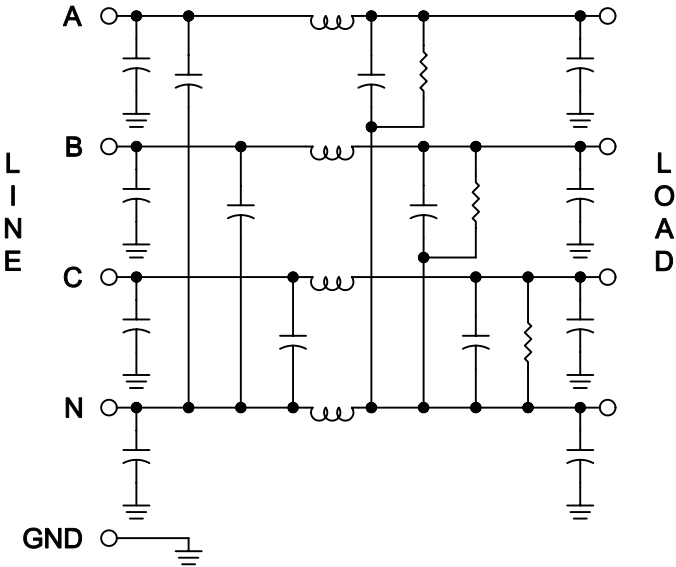

INSERTION LOSS (50Ω TYPICAL)

	.05 MHz	.15 MHz	.50 MHz	1.5 MHz	5.0 MHz	20 MHz
L/N	15 db	20 db	60 db	60 db	50 db	50 db
L/G	7 db	22 db	40 db	50 db	60 db	55 db

NEXT ASSY	USED ON
APPLICATION	

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE INCHES TOLERANCES ARE: FRACTIONS DECIMALS ANGLES ± .XX ±.030 ± .XXX ±.010		
MATERIAL		
FINISH		

CONTRACT NO.	
APPROVALS	DATE
DRAWN DV	01-12-10
CHECKED DV	01-12-10

FILTER CONCEPTS INC.			
APPLICATION DRAWING 2166 FILTER			
SIZE B	CODE IDENT NO.	DRAWING NO. 7128-1	
SCALE 2/5		SHEET 1	OF 1