

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

ALL RIGHTS RESERVED.

©

COPYRIGHT - By -

LOC

DIST

REVISIONS

BD

39

P

LTR

DESCRIPTION

DATE

DWN

APVD


F1

REVISED PER ECO-11-005027

11MAR11


RK

HMR

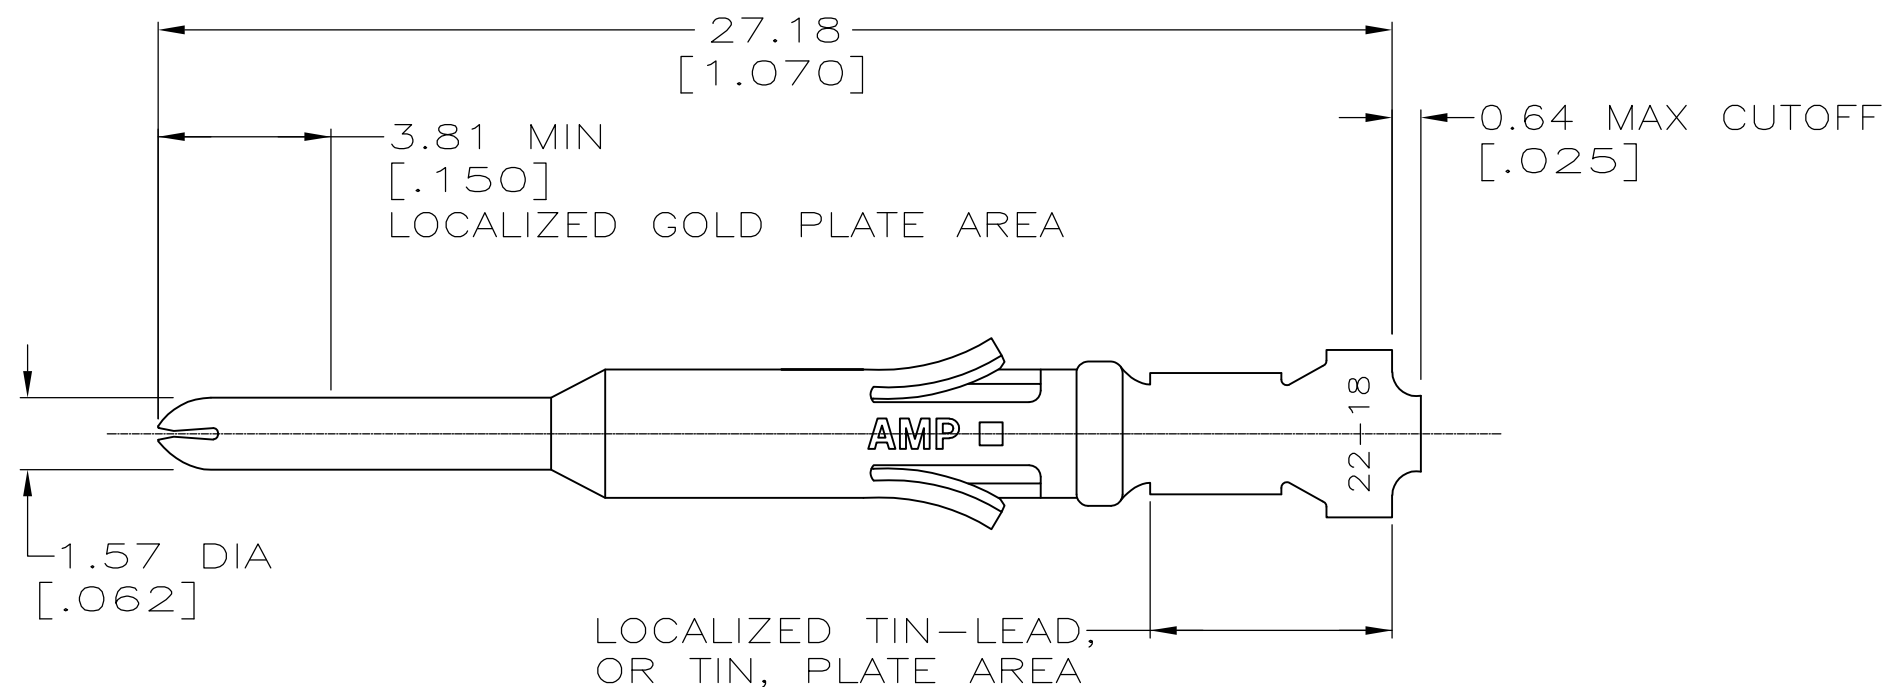

1. WIRE RANGE 22-18 AWG.
2. INSULATION RANGE 1.27-2.79[.050-.110] DIA.
3. 0.76 μ m [.000030] MIN GOLD IN LOCALIZED GOLD PLATE AREA,
1.27 μ m [.000050] MIN TIN-LEAD IN LOCALIZED TIN-LEAD PLATE AREA,
BOTH OVER 1.27 μ m [.000050] MIN NICKEL.
4. TIN PLATED.
5. GOLD PLATING PER MIL-G-45204, TIN PER MIL-T-10727
AND NICKEL PER QQ-N-290.
6. 0.76 μ m [.000030] MIN GOLD IN LOCALIZED GOLD PLATE AREA,
1.27 μ m [.000050] MIN TIN IN LOCALIZED TIN PLATE AREA,
BOTH OVER 1.27 μ m [.000050] MIN NICKEL.

66581-7	6	66591-4
66581-4	3	66591-2
66581-2	4	66591-1
STRIP REF	FINISH	PART NO

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN D.HARDY 06/15/94	 TE Connectivity			
DIMENSIONS: INCHES		CHK R.STONE 06/22/94				
		APVD G.STEINHAUER 06/27/94	NAME CONTACT, PIN, LOOSE PIECE, TYPE VI, MULTIMATE			
		PRODUCT SPEC				
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APPLICATION SPEC				
0 PLC ± - 1 PLC ± - 2 PLC ± 0.13 [.005] 3 PLC ± - 4 PLC ± - ANGLES ± -		WEIGHT -	SIZE A3	CAGE CODE 00779	DRAWING NO C-66591	RESTRICTED TO -
MATERIAL BRS PER MIL-C-50		FINISH 5 SEE TABLE	CUSTOMER DRAWING			
			SCALE 6:1	SHEET 1 OF 1	REV F1	