

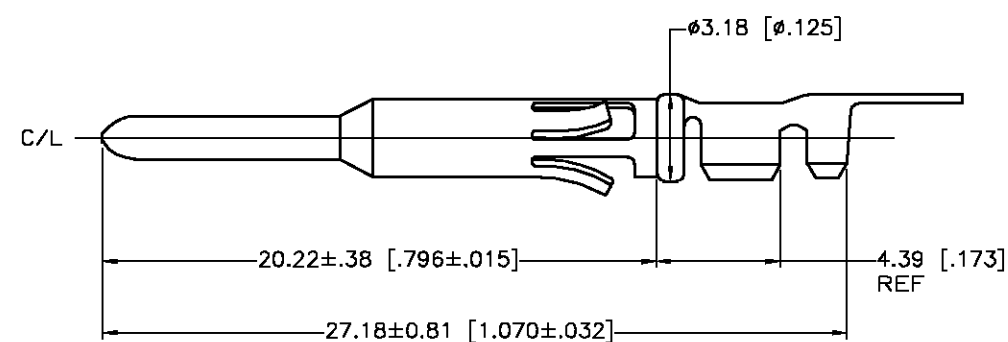


THIS DRAWING IS UNPUBLISHED.


RELEASED FOR PUBLICATION

© COPYRIGHT - BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.


LOC	DIST	REVISIONS				
P	LTR	DESCRIPTION	DATE	DWN	APVD	
	G	REV PER EC 0G3B-0317-03	24APR03	VF	GS	

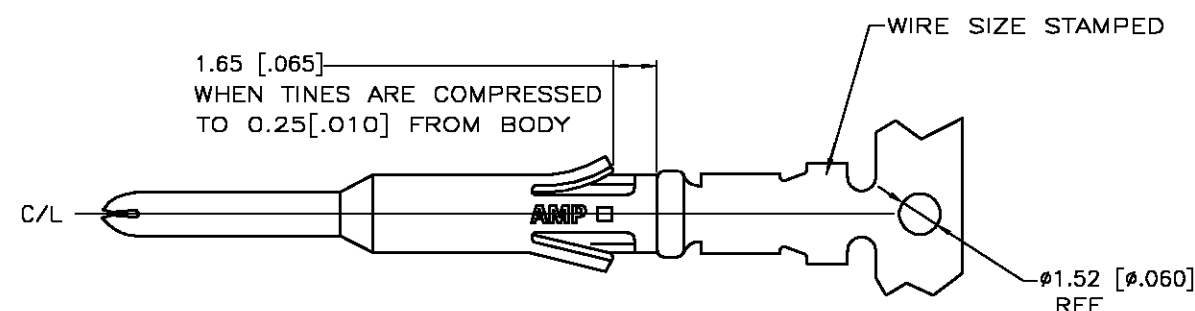

SECTION B-B

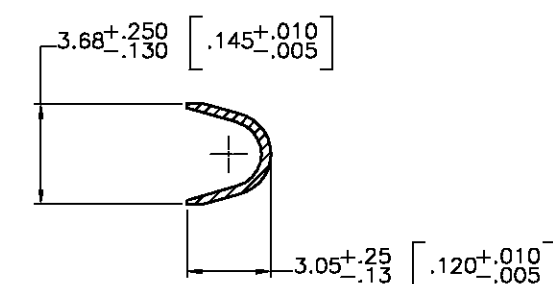

SECTION A-A

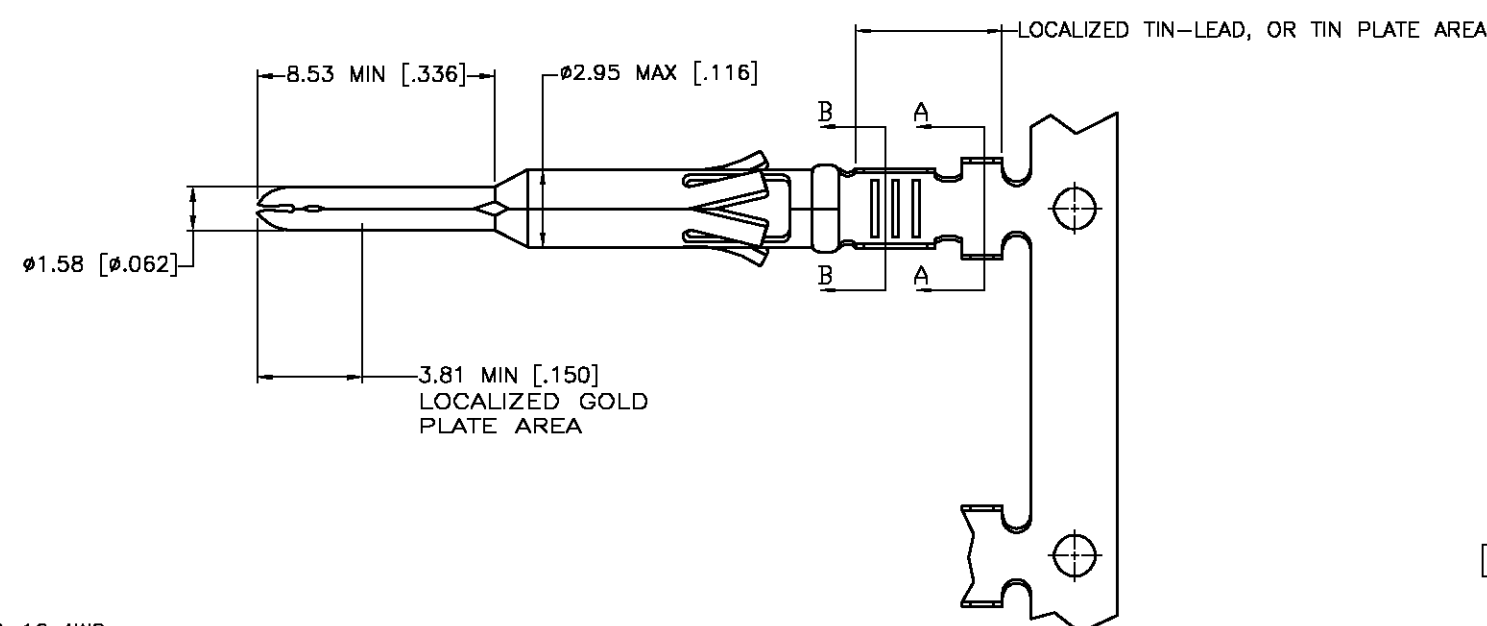

1. WIRE RANGE 18-16 AWG.
 2. INSULATION RANGE 2.54-2.03 [.100-.080] DIA.
 3. FOR LOOSE PIECE PART SEE DWG 66589.
- ⚠ 0.76µm [.000030] MIN GOLD IN LOCALIZED GOLD PLATE AREA,
1.27µm [.000050] MIN TIN-LEAD IN LOCALIZED TIN-LEAD PLATE AREA,
BOTH OVER 1.27µm [.000050] MIN NICKEL.
- ⚠ TIN PLATED.
- ⚠ 2.54µm [.000100] MIN SILVER OVER 1.27µm [.000050] MIN NICKEL.
- ⚠ GOLD PLATING PER MIL-G-45204, SILVER PER QQ-S-365, TIN PER MIL-T-10727
AND NICKEL PER QQ-N-290.
- ⚠ 0.76µm [.000030] MIN GOLD IN LOCALIZED GOLD PLATE AREA,
1.27µm [.000050] MIN TIN IN LOCALIZED TIN PLATE AREA,
BOTH OVER 1.27µm [.000050] MIN NICKEL.

OBSOLETE

REVERSE REELED FOR MINI-APPLICATOR	8	66579-7
-	6	66579-6
REVERSE REELED FOR MINI-APPLICATOR	4	66579-4
-	4	66579-3
REVERSE REELED FOR MINI-APPLICATOR	5	66579-2
-	5	66579-1
DESCRIPTION	FINISH	

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: MM [INCHES]	TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC	± -
1 PLC	± -
2 PLC	± 0.13 [.005]
3 PLC	± -
4 PLC	± -
ANGLES	± -
MATERIAL	FINISH
BRASS MIL-C-50	SEE TABLE

DWN V. FURLER	14MAY2003	tyco Electronics		Tyco Electronics Corporation	
CHK G. STEINHAUER	16MAY03			Harrisburg, PA 17105	
APVD G. STEINHAUER	16MAY03	NAME		CONTACT, PIN, STRIP, TYPE VI, MULTIMATE	
PRODUCT SPEC					
APPLICATION SPEC					
WEIGHT	-	SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
CUSTOMER DRAWING		A3	00779	C-66579	-
		SCALE	8:5	SHEET	1 OF 1
				REV	G