

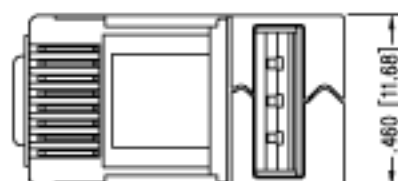





Bomar Interconnect

P/N 300668SEZ

- * EIGHT CONDUCTOR MODULAR PLUG
- * FOR CONDUCTORS WITH AN O.D. RANGE OF .037-.041
- * USE FOR SOLID OR STRANDED CONDUCTORS
- * SHIELDED VERSION MODULAR PLUG



SECTION VIEW
WITH NO SHIELD

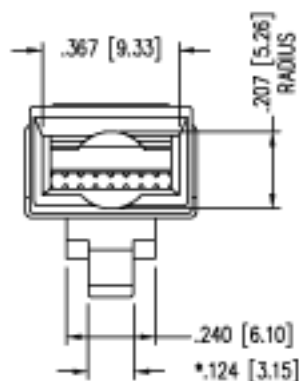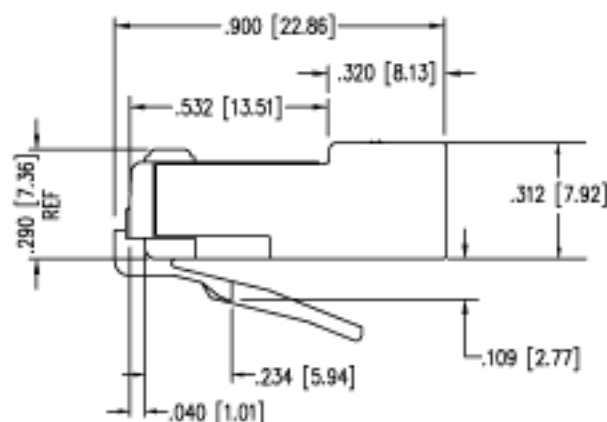

CONTACT MATERIAL:

PHOSPHOR BRONZE - .014 THK

CONTACT PLATING:

50 MICRO-INCH : OTHER PLATING OPTIONS AVAILABLE
SELECTIVE 24 CARAT HARD GOLD PLATE IN CONTACT AREA
OVER 100 MICRO-INCH MINIMUM NICKEL PLATE
PER CURRENT SELECTIVE GOLD PLATING REQUIREMENTS.

PLUG MATERIAL:

POLYCARBONATE

PLUG TOLERANCES
AND DIMENSIONS:

COMPLIES WITH F.C.C REQUIREMENTS

FLAME AUTO EXTINGUISH

94-V0 - File# E188111

OPERATION TEMPERATURE:

-40°C TO +70°C

INSERTION/EXTRACTION LIFE:

1000 CYCLES

CONTACT RESISTANCE:

10 MILLOHMS MAX.

CURRENT/VOLTAGE:

30 VAC/42 VDC AT 1.5 AMPS

(RoHS COMPLIANT)