


AVERY DENNISON MARKETING SPECIFICATION

HISTORY

REV.	DATE	DESCRIPTION
B	12.16.14	UPDATE FORMAT, CHG DIM 5 AND ADDED NOTE TO DIM 5; ADDED UL LOGO AND FLAME RATING NOTE

THE SUBJECT MATTER DISCLOSED HEREIN EMBODIES PROPRIETARY INFORMATION WHICH IS UNLAWFULLY REPRODUCED OR TRANSMITTED IN ANY MANNER OR IN ANY MEDIUM BE CLERK, REPRODUCED, DISCLOSED TO OTHERS, PUBLISHED OR USED IN WHOLE OR IN PART, FOR ANY PURPOSE OTHER THAN THAT FOR WHICH IT IS BEING MADE AVAILABLE WITHOUT THE EXPRESS ADVANCE WRITTEN PERMISSION OF A DULY AUTHORIZED AGENT OF THE COMPANY. THIS DOCUMENT IS THE PROPERTY OF THE AVERY DENNISON CO. AND IS TO BE RETURNED TO THE COMPANY ON DEMAND.

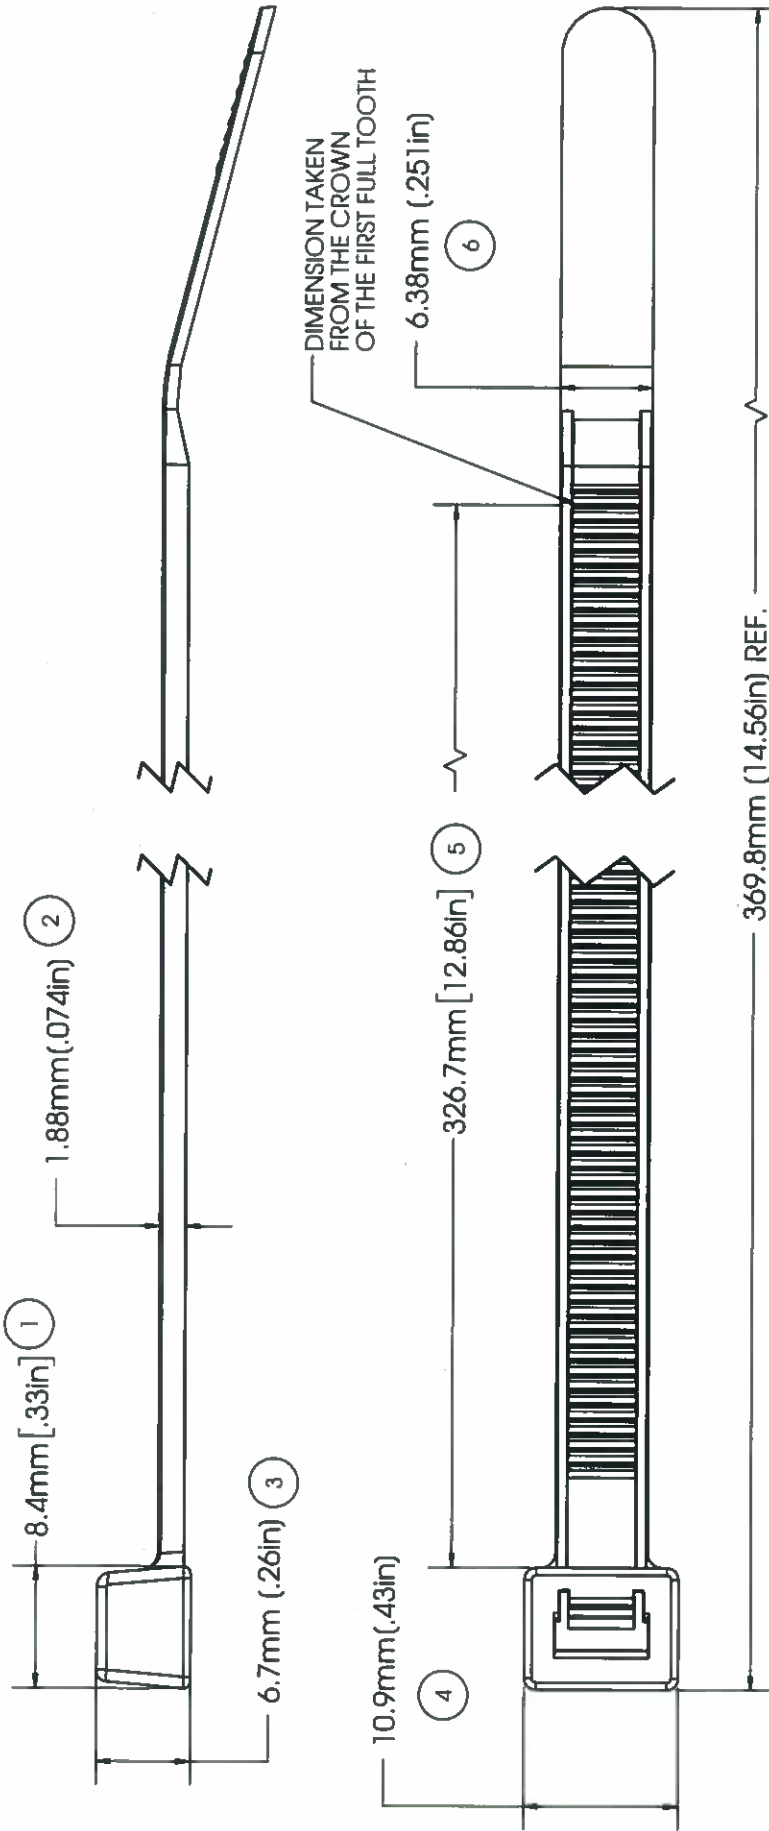

NOTE: THESE CABLE TIES ARE UV RESISTANT AND HAVE A FLAMMABILITY RATING OF V-2

MILITARY STANDARD:	MS-3367-3-0	ENG. APPR:	<i>R. O. M.</i> 12/16/14	AVERY DENNISON	
LOOP TENSILE STRENGTH:	120 LBF /534N MIN. PER AS-23190	G.A. APPR:	<i>F. B. ...</i> 12-16-14	FASTENER DIVISION FRITCHBURG, MA, 01540 U.S.A. TEL: 1-800-225-9713 FAX: 978-353-6157	
OPERATING TEMP:	-40°F(-40°C) TO 176°F (80°C)	SPECIFIED TOLERANCES ARE:		DESCRIPTION	
MIN. INSTALLATION TEMP:	32°F(0°C)			14.5" CABLE TIE, HEAVY DUTY	
WEIGHT:	.155 OZ./4.58g			STOCK NO. 08382-0	
BUNDLE DIAMETER:	Ø4.7mm(.19in) TO Ø101.6mm(4.00in)			REV. B	
TOOL:	12001 - HAND INSTALLATION TOOL 12500 - PNEUM. INSTALLATION TOOL				
TOOL TENSION SETTING:	6 - 8 ON HEAVY DUTY TOOL				
PACKAGING:	50/BAG, 1000/CASE				
MATERIAL: NYLON 6/6, WEATHER RESISTANT					
COLOR: BLACK					
ANGULAR: ± 2°					