


# High-Stability & Ultra-Low Phase Noise SMD OCXO/VCOCXO



AOC1409 Series



ESD Sensitive

14.9 x 9.7 x 7.0mm  
RoHS/RoHS II Compliant  
MSL = 1


## Features

- Extremely low long-term aging:  $\pm 700$ ppb over 20 years
- Stability over temperature:  $\pm 10$ ppb over  $-40^{\circ}\text{C}$  to  $+85^{\circ}\text{C}$
- Excellent phase noise:  
( $-138\text{dBc/Hz}$  typ. @ 100Hz offset,  $-148\text{dBc/Hz}$  typ. @ 1kHz offset)
- 20.0MHz carrier frequency
- 14.9 x 9.7mm, 6-pin SMD reflow-solderable package
- 3.3 V<sub>dd</sub> supply
- SC-Cut, High “Q” resonator-based design

## Applications

- Stratum 3 & Stratum 3E compliant
- Cellular infrastructure; Base stations
- Test & measurement equipment
- Switches & routers
- Time & frequency references
- Precision GPS


## Part Identification

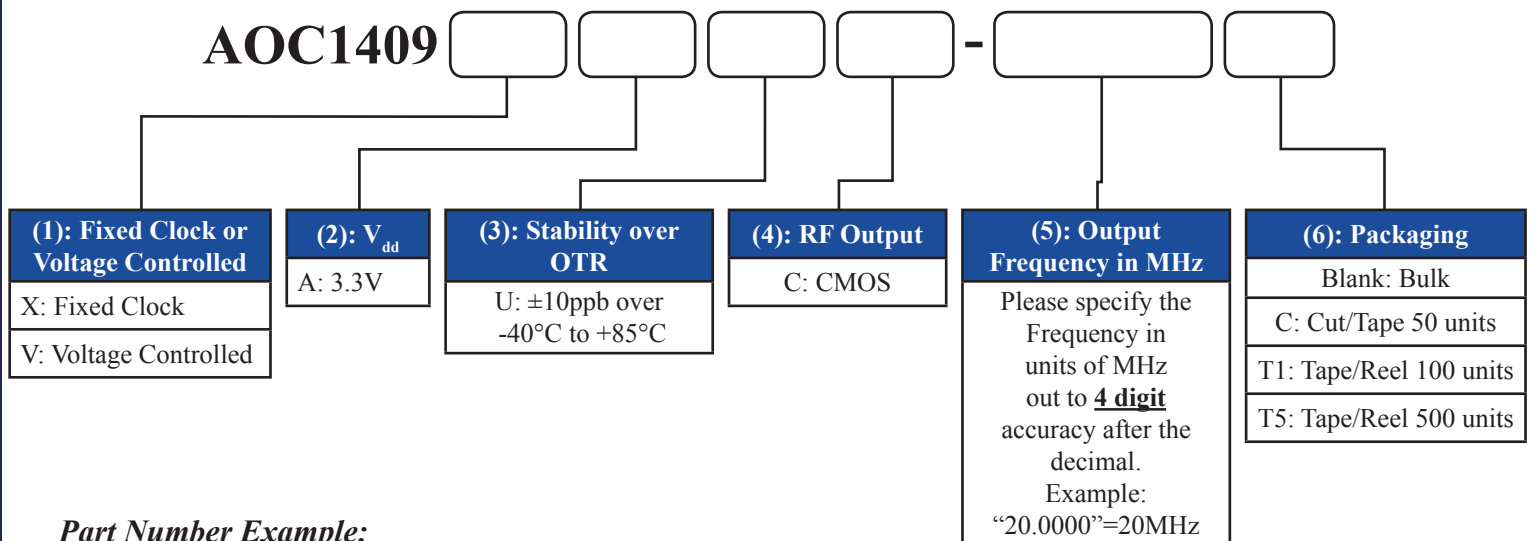

### Part Number Example:

**AOC1409VAUC-20.0000C**

# High-Stability & Ultra-Low Phase Noise SMD OCXO/VCOCXO



AOC1409 Series



ESD Sensitive

14.9 x 9.7 x 7.0mm  
RoHS/RoHS II Compliant  
MSL = 1

## Electrical Specifications

| Parameters                                                  | Min.               | Typical                | Max.                   | Unit   | Notes                                           |
|-------------------------------------------------------------|--------------------|------------------------|------------------------|--------|-------------------------------------------------|
| Frequency (Fc)                                              | 20.0000            |                        |                        | MHz    |                                                 |
| Operating Temperature Range                                 | -40                |                        | +85                    | °C     |                                                 |
| Storage Temperature Range                                   | -40                |                        | +100                   | °C     |                                                 |
| Supply Voltage (V <sub>dd</sub> )                           | +3.135             | +3.3                   | +3.465                 | V      |                                                 |
| Power Consumption (warm-up)                                 |                    |                        | 2.5                    | W      |                                                 |
| Current Consumption (warm-up)                               |                    |                        | 722                    | mA     | @ Max V <sub>dd</sub> = +3.465V                 |
| Power Consumption (steady-state @+25°C)                     |                    |                        | 1.0                    | W      |                                                 |
| Current Consumption (steady-state @+25°C)                   |                    |                        | 289                    | mA     | @ Max V <sub>dd</sub> = +3.465V                 |
| Frequency Accuracy (calibration)                            |                    | ≤ ±100                 | ±200                   | ppb    | See Note 1                                      |
| Frequency Stability over Operating Temperature Range        |                    |                        | ±10.0                  | ppb    | See Note 2                                      |
| Frequency Stability vs. Supply Voltage Change               |                    |                        | ±5.0                   | ppb    | V <sub>dd</sub> ±5%; (V <sub>c</sub> =constant) |
| Frequency Stability vs. Load Change                         |                    |                        | ±2.0                   | ppb    | Load=15pF±10%                                   |
| Aging Daily                                                 |                    |                        | ±1.0                   | ppb    |                                                 |
| Aging 1 <sup>st</sup> Year                                  |                    |                        | ±100                   | ppb    |                                                 |
| Aging 20 Years                                              |                    |                        | ±500                   | ppb    |                                                 |
| All-Inclusive Frequency Tolerance over 20 Year Product Life |                    |                        | ±700                   | ppb    | See Note 3                                      |
| Warm-Up Time                                                |                    |                        | 3                      | min.   | See Note 4                                      |
| Output Signal                                               | LVCMOS             |                        |                        |        |                                                 |
| Output Load                                                 | 13.5               | 15                     | 16.5                   | pF     |                                                 |
| Duty Cycle                                                  | 45                 | 50                     | 55                     | %      | @ 50% V <sub>dd</sub>                           |
| Output High Voltage (V <sub>OH</sub> )                      | V <sub>OH</sub>    | 0.9*(V <sub>dd</sub> ) |                        | V      | Load=15pF±10%;<br>V <sub>dd</sub> =+3.3V        |
| Output Low Voltage (V <sub>OL</sub> )                       | V <sub>OL</sub>    |                        | 0.1*(V <sub>dd</sub> ) |        |                                                 |
| Rise (Tr) / Fall (Tf) Time                                  |                    |                        | 6                      | ns     |                                                 |
| Center Control Voltage (V <sub>c</sub> )                    |                    | +1.65                  |                        | V      | Voltage-Controlled Option<br>(VCOCXO)           |
| Control Voltage Range                                       | +0.0               |                        | +3.3                   | V      |                                                 |
| Frequency Pullability                                       | ±0.7               |                        |                        | ppm    |                                                 |
| Control Port Input Impedance                                | 100                |                        |                        | kΩ     |                                                 |
| EFC Linearity                                               |                    |                        | ±10                    | %      |                                                 |
| Tuning Slope                                                | Positive Monotonic |                        |                        |        |                                                 |
| Phase Noise (@ 25 °C)                                       |                    | -85                    |                        | dBc/Hz | Offset @1Hz                                     |
|                                                             |                    | -115                   |                        |        | Offset @10Hz                                    |
|                                                             |                    | -138                   |                        |        | Offset @100Hz                                   |
|                                                             |                    | -148                   |                        |        | Offset @1kHz                                    |
|                                                             |                    | -152                   |                        |        | Offset @10kHz                                   |
|                                                             |                    | -154                   |                        |        | Offset @100kHz                                  |

Note 1: @ +25°C; initial set-tolerance frequency (relative to carrier) at time of shipment, pre-reflow

Note 2: Over -40°C to +85°C; relative to stabilized frequency after 1 hour of continuous operation, post-reflow

Note 3: Over -40°C to +85°C; includes stability over temperature, initial frequency accuracy (calibration), load pulling, power supply variation, and 20 years aging

Note 4: @ +25°C; within ±10ppb of F, where F is the stabilized frequency reached after 1 hour of continuous operation




5101 Hidden Creek Ln Spicewood TX 78669  
Phone: 512-371-6159 | Fax: 512-351-8858  
For terms and conditions of sales, please visit:  
www.abracon.com

REVISED: 03-19-19

ABRACON IS  
ISO9001-2015  
CERTIFIED

# High-Stability & Ultra-Low Phase Noise SMD OCXO/VCOCXO






AOC1409 Series




ESD Sensitive

14.9 x 9.7 x 7.0mm  
RoHS/RoHS II Compliant  
MSL = 1

## Mechanical Dimensions

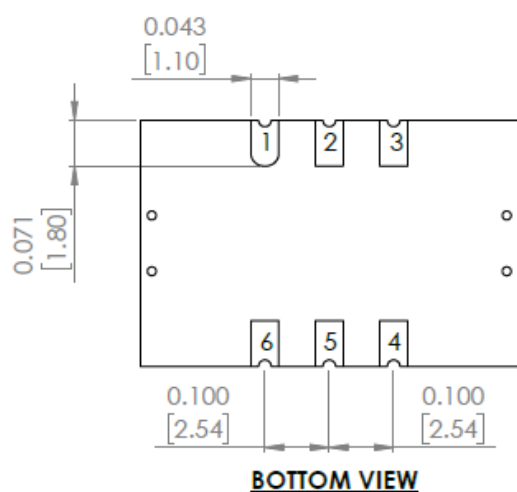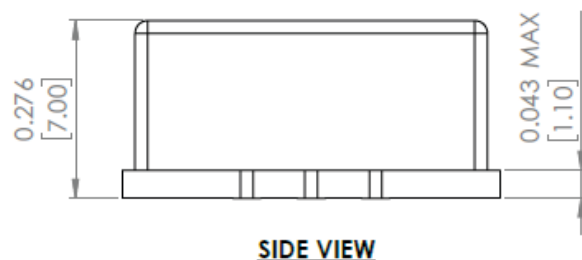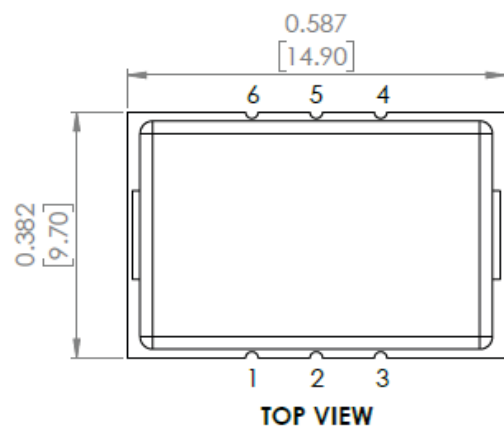

## RECOMMENDED LAND PATTERN

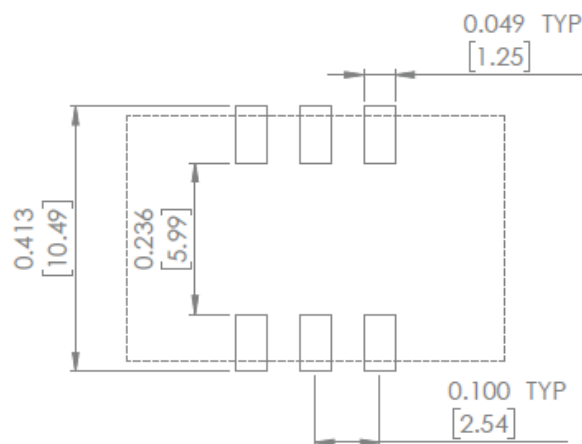

| Pin # | Function                                                     |
|-------|--------------------------------------------------------------|
| #1    | Option V:<br>Voltage-Control (Vc)<br>Option X:<br>No Connect |
| #2    | Do Not Connect (DNC) <sup>[Note 5]</sup>                     |
| #3    | GROUND                                                       |
| #4    | Output                                                       |
| #5    | Do Not Connect (DNC) <sup>[Note 5]</sup>                     |
| #6    | Supply Voltage (V <sub>dd</sub> )                            |

Dimensions: inches [mm]

Note 5: Do not electrically connect pins #2 & #5 as they are for factory use only.




5101 Hidden Creek Ln Spicewood TX 78669  
Phone: 512-371-6159 | Fax: 512-351-8858  
For terms and conditions of sales, please visit:  
[www.abracon.com](http://www.abracon.com)

REVISED: 03-19-19

ABRACON IS  
ISO9001-2015  
CERTIFIED

# High-Stability & Ultra-Low Phase Noise SMD OCXO/VCOCXO




AOC1409 Series



ESD Sensitive

14.9 x 9.7 x 7.0mm  
RoHS/RoHS II Compliant  
MSL = 1

## Recommended Reflow Profile <sup>[Note 6]</sup>

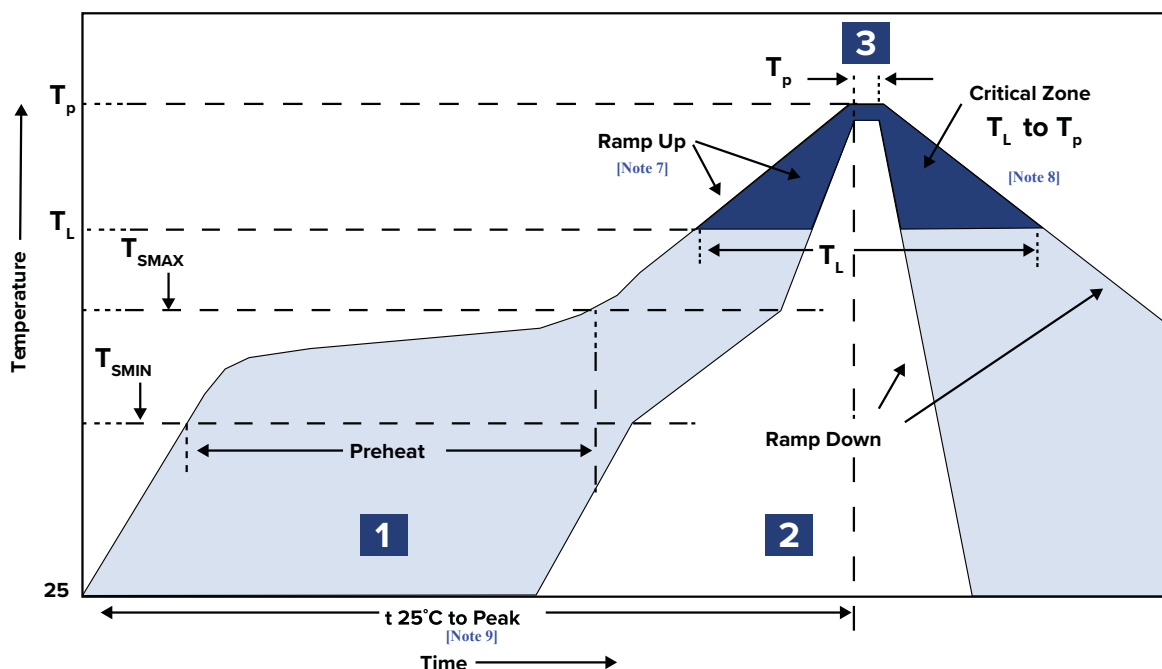

| Zone | Description    | Temperature                               | Time          |
|------|----------------|-------------------------------------------|---------------|
| 1    | Preheat / Soak | $T_{SMIN} \sim T_{SMAX}$<br>150°C ~ 200°C | 60 ~ 180 sec. |
| 2    | Reflow         | $T_L$<br>217°C                            | 60 ~ 150 sec. |
| 3    | Peak heat      | $T_P$<br>260°C ± 5°C                      | 20 ~ 40 sec.  |


Note 6: Can withstand 2 times reflow; all temperatures refer to topside of the package, measured on the package body surface

Note 7: Ramp Up Rate ( $T_L \rightarrow T_P$ ) = 3°C / sec. MAX

Note 8: Ramp Down Rate ( $T_P \rightarrow T_L$ ) = 6°C / sec. MAX

Note 9: Time 25°C to Peak Temperature ( $25^\circ\text{C} \rightarrow T_P$ ) = 8 minutes MAX

# High-Stability & Ultra-Low Phase Noise SMD OCXO/VCOCXO



AOC1409 Series



ESD Sensitive


14.9 x 9.7 x 7.0mm  
RoHS/RoHS II Compliant  
MSL = 1

## Packaging [Note 10]

C = Cut Tape 50 units

T1 = Tape & Reel 100 units/reel

T5 = Tape & Reel 500 units/reel

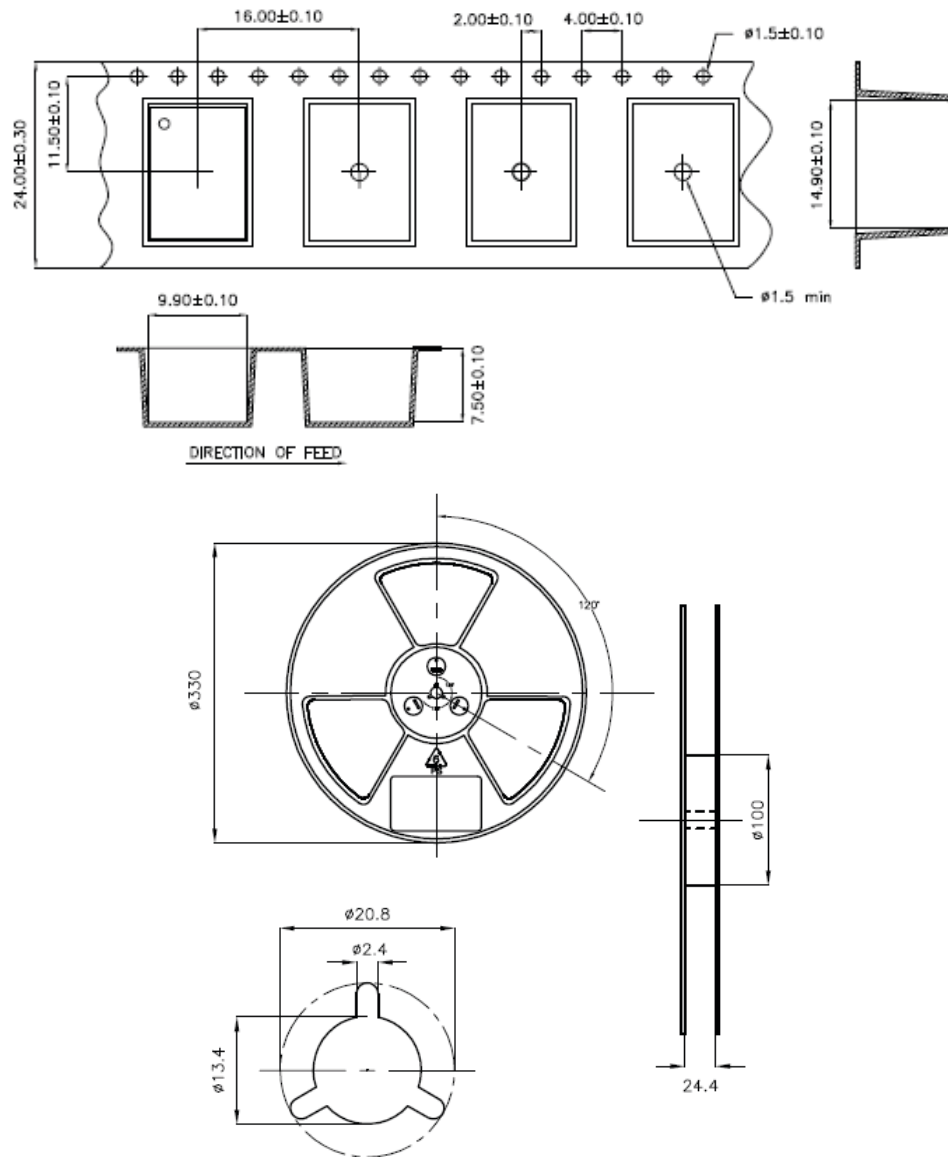

Dimensions: mm

Note 10: 500 units = maximum quantity per 330mm reel

**ATTENTION:** Abracon LLC's products are COTS – Commercial-Off-The-Shelf products; suitable for Commercial, Industrial and, where designated, Automotive Applications. Abracon's products are not specifically designed for Military, Aviation, Aerospace, Life-dependent Medical applications or any application requiring high reliability where component failure could result in loss of life and/or property. For applications requiring high reliability and/or presenting an extreme operating environment, written consent and authorization from Abracon LLC is required. Please contact Abracon LLC for more information.



5101 Hidden Creek Ln Spicewood TX 78669  
Phone: 512-371-6159 | Fax: 512-351-8858  
For terms and conditions of sales, please visit:  
[www.abracon.com](http://www.abracon.com)

REVISED: 03-19-19

ABRACON IS  
ISO9001-2015  
CERTIFIED