

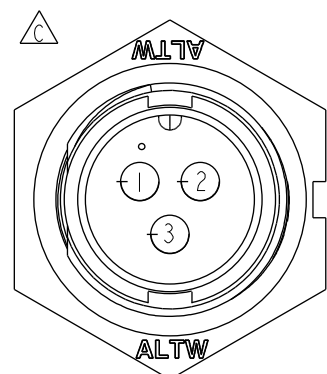

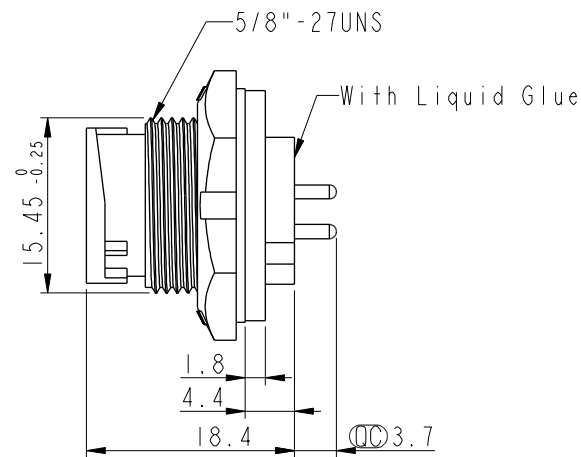
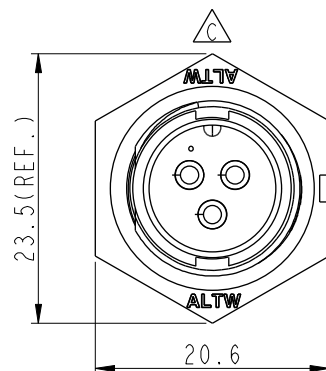




REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	LEN-8B0351	2008/09/17	Shin	Add Note and Update Drawing to New Format
C	LEN1540239	2014/12/23	Jinhai	Change Logo
D	CI90274	2019/02/20	Ruru	Modify Note



Pin Assignments
Front View



Recommended Panel Cut-Out

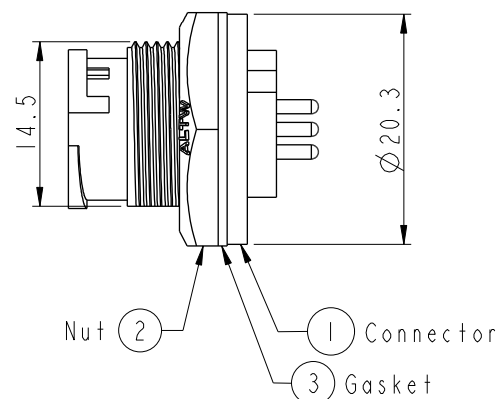

Note:

- * Important Dimensions To Check.
- * Waterproof Rate: IP67, Unmated
- * Housing: Thermoplastic, Black
- * Pin: Copper Alloy, Gold Plated
- * Nut: Thermoplastic, Black
- * Gasket: Rubber, Black

- Use with Waterproof Cap or Dustcap
Panel Thickness Max: 3.0mm
- Use without Waterproof Cap or Dustcap
Panel Thickness Max: 4.5mm
- * Gasket and Nut are packed separately in PE bags.

UNIT: mm		TOLERANCE		TITLE		ITEM NO.		DRAWN BY		DATE	
.X ±0.25		.XX ±0.1		Standard, Panel Lock 3Pin M Conn M Pin		BB-03PMMP-LC7001		Ruru		2019-02-20	
.XXX ±0.05		ANGLES ±1°		SCALE 1:1		DWG NO BB-03PMMP-LC7001		CHECKED BY Rita		DATE 2019-02-20	
REV. D		WC-REV. A.3		SIZE A4		CUSTOMER ALTW		APPROVED BY Max		DATE 2019-02-20	
				SHEET 1 OF 1							
				QC: Inspection item							

Amphenol LTW
安費諾亮泰企業股份有限公司