

## QUAD FREQUENCY CRYSTAL OSCILLATOR (XO) (10 MHz TO 1.4 GHz)

### Features

- Available with any-rate output frequencies from 10 MHz to 945 MHz and select frequencies to 1.4 GHz
- Four selectable output frequencies
- 3rd generation DSPLL® with superior jitter performance
- 3x better frequency stability than SAW-based oscillators
- Internal fixed crystal frequency ensures high reliability and low aging
- Available CMOS, LVPECL, LVDS, and CML outputs
- 3.3, 2.5, and 1.8 V supply options
- Industry-standard 5 x 7 mm package and pinout
- Pb-free/RoHS-compliant

### Applications

- SONET/SDH
- Networking
- SD/HD video
- Test and measurement
- Clock and data recovery
- FPGA/ASIC clock generation

### Description

The Si534 quad frequency XO utilizes Silicon Laboratories' advanced DSPLL® circuitry to provide a low jitter clock at high frequencies. The Si534 is available with any-rate output frequency from 10 to 945 MHz and select frequencies to 1400 MHz. Unlike a traditional XO where a different crystal is required for each output frequency, the Si534 uses one fixed crystal to provide a wide range of output frequencies. This IC-based approach allows the crystal resonator to provide exceptional frequency stability and reliability. In addition, DSPLL clock synthesis provides superior supply noise rejection, simplifying the task of generating low jitter clocks in noisy environments typically found in communication systems. The Si534 IC-based XO is factory configurable for a wide variety of user specifications including frequency, supply voltage, output format, and temperature stability. Specific configurations are factory programmed at time of shipment, thereby eliminating long lead times associated with custom oscillators.

### Functional Block Diagram



### Ordering Information:

See page 7.

### Pin Assignments:

See page 6.

(Top View)



(LVDS/LVPECL/CML)



(CMOS)

## 1. Electrical Specifications

**Table 1. Recommended Operating Conditions**

| Parameter                                                                                                                                                                                                               | Symbol   | Test Condition           | Min                  | Typ | Max  | Units |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------|--------------------------|----------------------|-----|------|-------|
| Supply Voltage <sup>1</sup>                                                                                                                                                                                             | $V_{DD}$ | 3.3 V option             | 2.97                 | 3.3 | 3.63 | V     |
|                                                                                                                                                                                                                         |          | 2.5 V option             | 2.25                 | 2.5 | 2.75 | V     |
|                                                                                                                                                                                                                         |          | 1.8 V option             | 1.71                 | 1.8 | 1.89 | V     |
| Supply Current                                                                                                                                                                                                          | $I_{DD}$ | Output enabled<br>LVPECL | —                    | 111 | 121  | mA    |
|                                                                                                                                                                                                                         |          | CML                      | —                    | 99  | 108  |       |
|                                                                                                                                                                                                                         |          | LVDS                     | —                    | 90  | 98   |       |
|                                                                                                                                                                                                                         |          | CMOS                     | —                    | 81  | 88   |       |
|                                                                                                                                                                                                                         |          | Tristate mode            | —                    | 60  | 75   | mA    |
| Output Enable (OE)<br>and Frequency Select FS[1:0] <sup>2</sup>                                                                                                                                                         |          | $V_{IH}$                 | $0.75 \times V_{DD}$ | —   | —    | V     |
|                                                                                                                                                                                                                         |          | $V_{IL}$                 | —                    | —   | 0.5  | V     |
| Operating Temperature Range                                                                                                                                                                                             | $T_A$    |                          | −40                  | —   | 85   | °C    |
| <b>Notes:</b><br>1. Selectable parameter specified by part number. See Section 3. "Ordering Information" on page 7 for further details.<br>2. OE and FS[1:0] pins include a 17 k $\Omega$ pullup resistor to $V_{DD}$ . |          |                          |                      |     |      |       |

**Table 2. CLK± Output Frequency Characteristics**

| Parameter                                                                                                                                                                                                                                                                                                                            | Symbol         | Test Condition                         | Min              | Typ         | Max              | Units |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------|----------------------------------------|------------------|-------------|------------------|-------|
| Nominal Frequency <sup>1,2</sup>                                                                                                                                                                                                                                                                                                     | f <sub>O</sub> | LVPECL/LVDS/CML                        | 10               | —           | 945              | MHz   |
|                                                                                                                                                                                                                                                                                                                                      |                | CMOS                                   | 10               | —           | 160              | MHz   |
| Initial Accuracy                                                                                                                                                                                                                                                                                                                     | f <sub>i</sub> | Measured at +25 °C at time of shipping | —                | ±1.5        | —                | ppm   |
| Temperature Stability <sup>1,3</sup>                                                                                                                                                                                                                                                                                                 |                |                                        | −7<br>−20<br>−50 | —<br>—<br>— | +7<br>+20<br>+50 | ppm   |
| Aging                                                                                                                                                                                                                                                                                                                                | f <sub>a</sub> | Frequency drift over first year        | —                | —           | ±3               | ppm   |
|                                                                                                                                                                                                                                                                                                                                      |                | Frequency drift over 20-year life      | —                | —           | ±10              | ppm   |
| Total Stability                                                                                                                                                                                                                                                                                                                      |                | Temp stability = ±7 ppm                | —                | —           | ±20              | ppm   |
|                                                                                                                                                                                                                                                                                                                                      |                | Temp stability = ±20 ppm               | —                | —           | ±31.5            | ppm   |
|                                                                                                                                                                                                                                                                                                                                      |                | Temp stability = ±50 ppm               | —                | —           | ±61.5            | ppm   |
| <b>Notes:</b><br>1. See Section 3. "Ordering Information" on page 7 for further details.<br>2. Specified at time of order by part number. Also available in frequencies from 970 to 1134 MHz and 1213 to 1417 MHz.<br>3. Selectable parameter specified by part number.<br>4. Time from powerup or tristate mode to f <sub>O</sub> . |                |                                        |                  |             |                  |       |

Table 2. CLK± Output Frequency Characteristics (Continued)

| Parameter                                                                                                                                                                                                                                                                                                                                                                                              | Symbol    | Test Condition                               | Min | Typ | Max | Units |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------|----------------------------------------------|-----|-----|-----|-------|
| Powerup Time <sup>4</sup>                                                                                                                                                                                                                                                                                                                                                                              | $t_{OSC}$ |                                              | —   | —   | 10  | ms    |
| Settling Time After FS[1:0] Change                                                                                                                                                                                                                                                                                                                                                                     | $t_{FRQ}$ | Both FS[1] and FS[0] changing simultaneously | —   | —   | 20  | ms    |
| <b>Notes:</b> <ol style="list-style-type: none"> <li>1. See Section 3. "Ordering Information" on page 7 for further details.</li> <li>2. Specified at time of order by part number. Also available in frequencies from 970 to 1134 MHz and 1213 to 1417 MHz.</li> <li>3. Selectable parameter specified by part number.</li> <li>4. Time from powerup or tristate mode to <math>f_O</math>.</li> </ol> |           |                                              |     |     |     |       |

Table 3. CLK± Output Levels and Symmetry

| Parameter                                                                                                                                                                                                                     | Symbol     | Test Condition                                                             | Min                 | Typ             | Max             | Units    |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------|----------------------------------------------------------------------------|---------------------|-----------------|-----------------|----------|
| LVPECL Output Option <sup>1</sup>                                                                                                                                                                                             | $V_O$      | mid-level                                                                  | $V_{DD} - 1.42$     | —               | $V_{DD} - 1.25$ | V        |
|                                                                                                                                                                                                                               | $V_{OD}$   | swing (diff)                                                               | 1.1                 | —               | 1.9             | $V_{PP}$ |
|                                                                                                                                                                                                                               | $V_{SE}$   | swing (single-ended)                                                       | 0.55                | —               | 0.95            | $V_{PP}$ |
| LVDS Output Option <sup>2</sup>                                                                                                                                                                                               | $V_O$      | mid-level                                                                  | 1.125               | 1.20            | 1.275           | V        |
|                                                                                                                                                                                                                               | $V_{OD}$   | swing (diff)                                                               | 0.5                 | 0.7             | 0.9             | $V_{PP}$ |
| CML Output Option <sup>2</sup>                                                                                                                                                                                                | $V_O$      | 2.5/3.3 V option mid-level                                                 | —                   | $V_{DD} - 1.30$ | —               | V        |
|                                                                                                                                                                                                                               |            | 1.8 V option mid-level                                                     | —                   | $V_{DD} - 0.36$ | —               | V        |
|                                                                                                                                                                                                                               | $V_{OD}$   | 2.5/3.3 V option swing (diff)                                              | 1.10                | 1.50            | 1.90            | $V_{PP}$ |
|                                                                                                                                                                                                                               |            | 1.8 V option swing (diff)                                                  | 0.35                | 0.425           | 0.50            | $V_{PP}$ |
| CMOS Output Option <sup>3</sup>                                                                                                                                                                                               | $V_{OH}$   | $I_{OH} = 32$ mA                                                           | $0.8 \times V_{DD}$ | —               | $V_{DD}$        | V        |
|                                                                                                                                                                                                                               | $V_{OL}$   | $I_{OL} = 32$ mA                                                           | —                   | —               | 0.4             | V        |
| Rise/Fall time (20/80%)                                                                                                                                                                                                       | $t_R, t_F$ | LVPECL/LVDS/CML                                                            | —                   | —               | 350             | ps       |
|                                                                                                                                                                                                                               |            | CMOS with $C_L = 15$ pF                                                    | —                   | 1               | —               | ns       |
| Symmetry (duty cycle)                                                                                                                                                                                                         | SYM        | LVPECL: $V_{DD} - 1.3$ V (diff)<br>LVDS: 1.25 V (diff)<br>CMOS: $V_{DD}/2$ | 45                  | —               | 55              | %        |
| <b>Notes:</b> <ol style="list-style-type: none"> <li>1. <math>50 \Omega</math> to <math>V_{DD} - 2.0</math> V.</li> <li>2. <math>R_{term} = 100 \Omega</math> (differential).</li> <li>3. <math>C_L = 15</math> pF</li> </ol> |            |                                                                            |                     |                 |                 |          |

Table 4. CLK± Output Phase Jitter

| Parameter                                                                                                                                                                                                                       | Symbol         | Test Condition                         | Min | Typ  | Max  | Units |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------|----------------------------------------|-----|------|------|-------|
| Phase Jitter (RMS) <sup>1</sup><br>for F <sub>OUT</sub> ≥ 500 MHz                                                                                                                                                               | ϕ <sub>J</sub> | 12 kHz to 20 MHz (OC-48)               | —   | 0.25 | 0.40 | ps    |
|                                                                                                                                                                                                                                 |                | 50 kHz to 80 MHz (OC-192)              | —   | 0.26 | 0.37 | ps    |
| Phase Jitter (RMS) <sup>1</sup><br>for F <sub>OUT</sub> of 125 to 500 MHz                                                                                                                                                       | ϕ <sub>J</sub> | 12 kHz to 20 MHz (OC-48)               | —   | 0.36 | 0.50 | ps    |
|                                                                                                                                                                                                                                 |                | 50 kHz to 80 MHz (OC-192) <sup>2</sup> | —   | 0.34 | 0.42 | ps    |
| Phase Jitter (RMS)<br>for F <sub>OUT</sub> of 10 to 160 MHz<br>CMOS Output Only                                                                                                                                                 | ϕ <sub>J</sub> | 12 kHz to 20 MHz (OC-48) <sup>2</sup>  | —   | 0.62 | —    | ps    |
|                                                                                                                                                                                                                                 |                | 50 kHz to 20 MHz <sup>2</sup>          | —   | 0.61 | —    | ps    |
| <b>Notes:</b><br>1. Refer to AN256 for further information.<br>2. Max offset frequencies: 80 MHz for F <sub>OUT</sub> ≥ 250 MHz, 20 MHz for 50 MHz ≤ F <sub>OUT</sub> <250 MHz,<br>2 MHz for 10 MHz ≤ F <sub>OUT</sub> <50 MHz. |                |                                        |     |      |      |       |

Table 5. CLK± Output Period Jitter

| Parameter                                                                                                           | Symbol           | Test Condition | Min | Typ | Max | Units |
|---------------------------------------------------------------------------------------------------------------------|------------------|----------------|-----|-----|-----|-------|
| Period Jitter*                                                                                                      | J <sub>PER</sub> | RMS            | —   | 2   | —   | ps    |
|                                                                                                                     |                  | Peak-to-Peak   | —   | 14  | —   | ps    |
| *Note: Any output mode, including CMOS, LVPECL, LVDS, CML. N = 1000 cycles. Refer to AN279 for further information. |                  |                |     |     |     |       |

Table 6. CLK± Output Phase Noise (Typical)

| Offset Frequency (f) | 120.00 MHz<br>LVDS | 156.25 MHz<br>LVPECL | 622.08 MHz<br>LVPECL | Units  |
|----------------------|--------------------|----------------------|----------------------|--------|
| 100 Hz               | −112               | −105                 | −97                  | dBc/Hz |
| 1 kHz                | −122               | −122                 | −107                 |        |
| 10 kHz               | −132               | −128                 | −116                 |        |
| 100 kHz              | −137               | −135                 | −121                 |        |
| 1 MHz                | −144               | −144                 | −134                 |        |
| 10 MHz               | −150               | −147                 | −146                 |        |
| 100 MHz              | n/a                | n/a                  | −148                 |        |

**Table 7. Environmental Compliance**

The Si534 meets the following qualification test requirements.

| Parameter                  | Conditions/Test Method   |
|----------------------------|--------------------------|
| Mechanical Shock           | MIL-STD-883, Method 2002 |
| Mechanical Vibration       | MIL-STD-883, Method 2007 |
| Solderability              | MIL-STD-883, Method 2003 |
| Gross & Fine Leak          | MIL-STD-883, Method 1014 |
| Resistance to Solder Heat  | MIL-STD-883, Method 2036 |
| Moisture Sensitivity Level | J-STD_020, MSL1          |
| Contact Pads               | Gold over Nickel         |

**Table 8. Thermal Characteristics**

(Typical values  $T_A = 25\text{ }^{\circ}\text{C}$ ,  $V_{DD} = 3.3\text{ V}$ )

| Parameter                              | Symbol        | Test Condition | Min | Typ  | Max | Unit                 |
|----------------------------------------|---------------|----------------|-----|------|-----|----------------------|
| Thermal Resistance Junction to Ambient | $\theta_{JA}$ | Still Air      | —   | 84.6 | —   | $^{\circ}\text{C/W}$ |
| Thermal Resistance Junction to Case    | $\theta_{JC}$ | Still Air      | —   | 38.8 | —   | $^{\circ}\text{C/W}$ |
| Ambient Temperature                    | $T_A$         |                | −40 | —    | 85  | $^{\circ}\text{C}$   |
| Junction Temperature                   | $T_J$         |                | —   | —    | 125 | $^{\circ}\text{C}$   |

**Table 9. Absolute Maximum Ratings<sup>1</sup>**

| Parameter                                                              | Symbol     | Rating                 | Units              |
|------------------------------------------------------------------------|------------|------------------------|--------------------|
| Maximum Operating Temperature                                          | $T_{AMAX}$ | 85                     | $^{\circ}\text{C}$ |
| Supply Voltage, 1.8 V Option                                           | $V_{DD}$   | −0.5 to +1.9           | V                  |
| Supply Voltage, 2.5/3.3 V Option                                       | $V_{DD}$   | −0.5 to +3.8           | V                  |
| Input Voltage (any input pin)                                          | $V_I$      | −0.5 to $V_{DD} + 0.3$ | V                  |
| Storage Temperature                                                    | $T_S$      | −55 to +125            | $^{\circ}\text{C}$ |
| ESD Sensitivity (HBM, per JESD22-A114)                                 | ESD        | 2000                   | V                  |
| Soldering Temperature (Pb-free profile) <sup>2</sup>                   | $T_{PEAK}$ | 260                    | $^{\circ}\text{C}$ |
| Soldering Temperature Time @ $T_{PEAK}$ (Pb-free profile) <sup>2</sup> | $t_P$      | 20–40                  | seconds            |

**Notes:**

1. Stresses beyond those listed in Absolute Maximum Ratings may cause permanent damage to the device. Functional operation or specification compliance is not implied at these conditions. Exposure to maximum rating conditions for extended periods may affect device reliability.
2. The device is compliant with JEDEC J-STD-020C. Refer to Si5xx Packaging FAQ available for download at [www.silabs.com/VCXO](http://www.silabs.com/VCXO) for further information, including soldering profiles.

## 2. Pin Descriptions

(Top View)

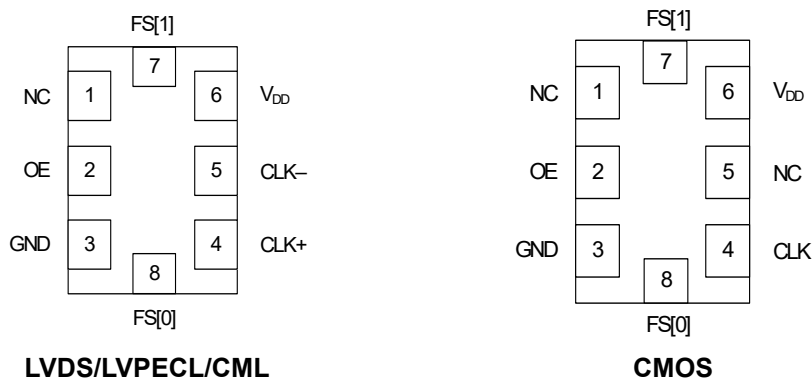


Table 10. Pin Descriptions

| Pin                                                                                                                                                                        | Symbol          | LVDS/LVPECL/CML Function                                                                   | CMOS Function                                                                              |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------|--------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------|
| 1                                                                                                                                                                          | NC              | No connection                                                                              | No connection                                                                              |
| 2                                                                                                                                                                          | OE*             | Output enable<br>0 = clock output disabled (outputs tristated)<br>1 = clock output enabled | Output enable<br>0 = clock output disabled (outputs tristated)<br>1 = clock output enabled |
| 3                                                                                                                                                                          | GND             | Electrical and Case Ground                                                                 | Electrical and Case Ground                                                                 |
| 4                                                                                                                                                                          | CLK+            | Oscillator Output                                                                          | Oscillator Output                                                                          |
| 5                                                                                                                                                                          | CLK-            | Complementary Output                                                                       | No connection                                                                              |
| 6                                                                                                                                                                          | V <sub>DD</sub> | Power Supply Voltage                                                                       | Power Supply Voltage                                                                       |
| 7                                                                                                                                                                          | FS[1]*          | Frequency Select MSB                                                                       | Frequency Select MSB                                                                       |
| 8                                                                                                                                                                          | FS[0]*          | Frequency Select LSB                                                                       | Frequency Select LSB                                                                       |
| <b>*Note:</b> FS[1:0] and OE include a 17 kΩ pullup resistor to V <sub>DD</sub> . See Section 3. "Ordering Information" on page 7 for details on frequency value ordering. |                 |                                                                                            |                                                                                            |

### 3. Ordering Information


The Si534 XO supports a variety of options including frequency, temperature stability, output format, and  $V_{DD}$ . Specific device configurations are programmed into the Si534 at time of shipment. Configurations can be specified using the Part Number Configuration chart below. Silicon Laboratories provides a web browser-based part number configuration utility to simplify this process. Refer to [www.silabs.com/VCXOPartNumber](http://www.silabs.com/VCXOPartNumber) to access this tool and for further ordering instructions. The Si534 is supplied in an industry-standard, RoHS compliant, 6-pad, 5 x 7 mm package.



**Figure 1. Part Number Convention**

## 4. Outline Diagram and Suggested Pad Layout

Figure 2 illustrates the package details for the Si534. Table 11 lists the values for the dimensions shown in the illustration.

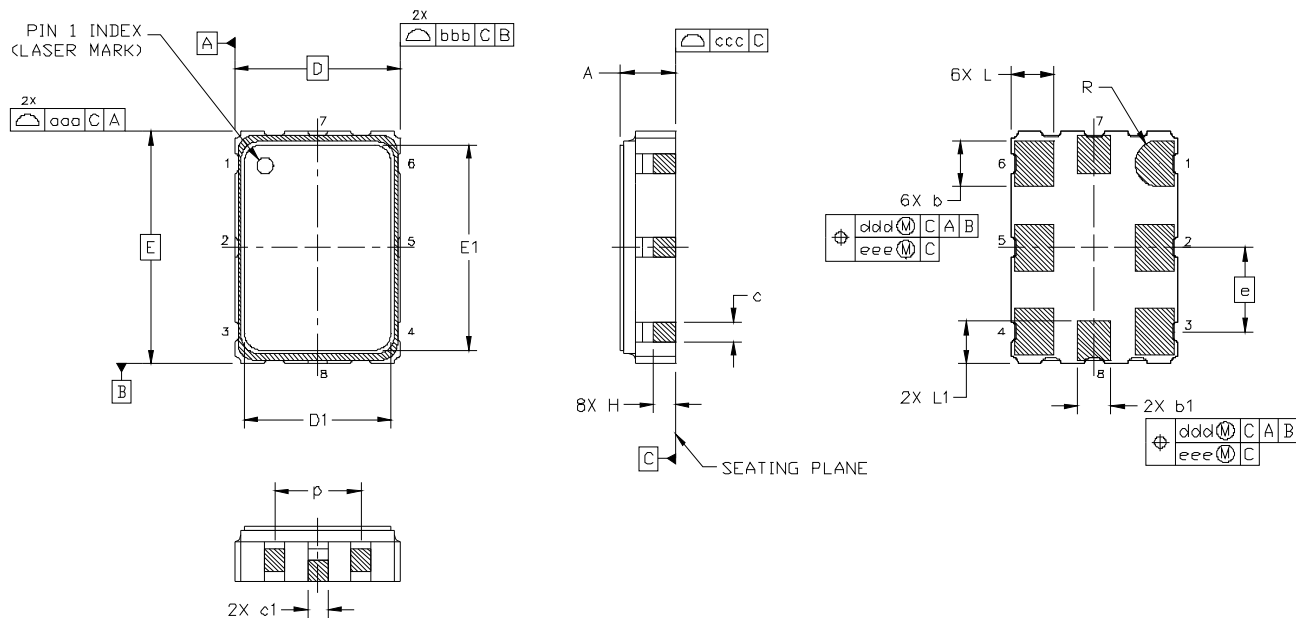

**Figure 2. Si534 Outline Diagram**

**Table 11. Package Diagram Dimensions (mm)**

| Dimension | Min      | Nom  | Max  |
|-----------|----------|------|------|
| A         | 1.50     | 1.65 | 1.80 |
| b         | 1.30     | 1.40 | 1.50 |
| b1        | 0.90     | 1.00 | 1.10 |
| c         | 0.50     | 0.60 | 0.70 |
| c1        | 0.30     | —    | 0.60 |
| D         | 5.00 BSC |      |      |
| D1        | 4.30     | 4.40 | 4.50 |
| e         | 2.54 BSC |      |      |
| E         | 7.00 BSC |      |      |
| E1        | 6.10     | 6.20 | 6.30 |
| H         | 0.55     | 0.65 | 0.75 |
| L         | 1.17     | 1.27 | 1.37 |
| L1        | 1.07     | 1.17 | 1.27 |
| p         | 1.80     | —    | 2.60 |
| R         | 0.70 REF |      |      |
| aaa       | —        | —    | 0.15 |
| bbb       | —        | —    | 0.15 |
| ccc       | —        | —    | 0.10 |
| ddd       | —        | —    | 0.10 |
| eee       | —        | —    | 0.05 |

**Note:**

1. All dimensions shown are in millimeters (mm) unless otherwise noted.
2. Dimensioning and Tolerancing per ANSI Y14.5M-1994.

## 5. Si534 Mark Specification

Figure 3 illustrates the mark specification for the Si534. Table 12 lists the line information.



**Figure 3. Mark Specification**

**Table 12. Si53x Top Mark Description**

| Line | Position          | Description                                                                                                                                            |
|------|-------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------|
| 1    | 1–10              | “SiLabs 534”                                                                                                                                           |
| 2    | 1–10              | Si530, Si531: Option1 + Option2 + Freq(7) + Temp<br>Si532, Si533, Si534, Si530/Si531 w/ 8-digit resolution:<br>Option1 + Option2 + ConfigNum(6) + Temp |
| 3    | <b>Trace Code</b> |                                                                                                                                                        |
|      | Position 1        | Pin 1 orientation mark (dot)                                                                                                                           |
|      | Position 2        | Product Revision (D)                                                                                                                                   |
|      | Position 3–6      | Tiny Trace Code (4 alphanumeric characters per assembly release instructions)                                                                          |
|      | Position 7        | Year (least significant year digit), to be assigned by assembly site (ex: 2007 = 7)                                                                    |
|      | Position 8–9      | Calendar Work Week number (1–53), to be assigned by assembly site                                                                                      |
|      | Position 10       | “+” to indicate Pb-Free and RoHS-compliant                                                                                                             |

## 6. 8-Pin PCB Land Pattern

Figure 4 illustrates the 8-pin PCB land pattern for the Si554. Table 13 lists the values for the dimensions shown in the illustration.



**Figure 4. Si534 PCB Land Pattern**

**Table 13. PCB Land Pattern Dimensions (mm)**

| Dimension                                                               | Min       | Max  |
|-------------------------------------------------------------------------|-----------|------|
| D2                                                                      | 5.08 REF  |      |
| D3                                                                      | 5.705 REF |      |
| e                                                                       | 2.54 BSC  |      |
| E2                                                                      | 4.20 REF  |      |
| GD                                                                      | 0.84      | —    |
| GE                                                                      | 2.00      | —    |
| VD                                                                      | 8.20 REF  |      |
| VE                                                                      | 7.30 REF  |      |
| X1                                                                      | 1.70 TYP  |      |
| X2                                                                      | 1.545 TYP |      |
| Y1                                                                      | 2.15 REF  |      |
| Y2                                                                      | 1.3 REF   |      |
| ZD                                                                      | —         | 6.78 |
| ZE                                                                      | —         | 6.30 |
| <b>Note:</b>                                                            |           |      |
| 1. Dimensioning and tolerancing per the ANSI Y14.5M-1994 specification. |           |      |
| 2. Land pattern design follows IPC-7351 guidelines.                     |           |      |
| 3. All dimensions shown are at maximum material condition (MMC).        |           |      |
| 4. Controlling dimension is in millimeters (mm).                        |           |      |

## DOCUMENT CHANGE LIST

### Revision 1.0 to Revision 1.1

- Updated Table 1, "Recommended Operating Conditions," on page 2.
  - Device maintains stable operation over  $-40$  to  $+85$  °C operating temperature range.
  - Supply current specifications updated for revision D.
- Updated Table 2, "CLK± Output Frequency Characteristics," on page 2.
  - Added specification for  $\pm 20$  ppm lifetime stability ( $\pm 7$  ppm temperature stability) XO.
- Updated Table 3, "CLK± Output Levels and Symmetry," on page 3.
  - Updated LVDS differential peak-peak swing specifications.
- Updated Table 4, "CLK± Output Phase Jitter," on page 4.
- Updated Table 5, "CLK± Output Period Jitter," on page 4.
  - Revised period jitter specifications.
- Updated Table 9, "Absolute Maximum Ratings<sup>1</sup>," on page 5 to reflect the soldering temperature time at  $260$  °C is 20–40 sec per JEDEC J-STD-020C.
- Updated 3. "Ordering Information" on page 7.
  - Changed ordering instructions to revision D.
- Added 5. "Si534 Mark Specification" on page 9.

### Revision 1.1 to Revision 1.2

- Updated 2.5 V/3.3 V and 1.8 V CML output level specifications for Table 3 on page 3.
- Added footnotes clarifying max offset frequency test conditions for Table 4 on page 4.
- Removed the words "Differential Modes: LVPECL/LVDS/CML" in the footnote referring to AN256 in Table 4 on page 4.
- Added CMOS phase jitter specs to Table 4 on page 4.
- Updated ESD HBM sensitivity rating in Table 9 on page 5.
- Updated Table 7 on page 5 to include the "Moisture Sensitivity Level" and "Contact Pads" rows.
- Revised Figure 2 on page 8 to reflect current package outline diagram.
- Updated Figure 3 and Table 12 on page 9 to reflect specific marking information. Previously, Figure 3 was generic.

### Revision 1.2 to Revision 1.3

- Added Table 8, "Thermal Characteristics," on page 5.

### Revision 1.3 to Revision 1.4

June, 2018

- Changed "Trays" to "Coil Tape" in section 3. "Ordering Information".

## ClockBuilder Pro

One-click access to Timing tools, documentation, software, source code libraries & more. Available for Windows and iOS (CBGo only).

[www.silabs.com/CBPro](http://www.silabs.com/CBPro)



**Timing Portfolio**  
[www.silabs.com/timing](http://www.silabs.com/timing)



**SW/HW**  
[www.silabs.com/CBPro](http://www.silabs.com/CBPro)



**Quality**  
[www.silabs.com/quality](http://www.silabs.com/quality)



**Support and Community**  
[community.silabs.com](http://community.silabs.com)

### Disclaimer

Silicon Labs intends to provide customers with the latest, accurate, and in-depth documentation of all peripherals and modules available for system and software implementers using or intending to use the Silicon Labs products. Characterization data, available modules and peripherals, memory sizes and memory addresses refer to each specific device, and "Typical" parameters provided can and do vary in different applications. Application examples described herein are for illustrative purposes only. Silicon Labs reserves the right to make changes without further notice to the product information, specifications, and descriptions herein, and does not give warranties as to the accuracy or completeness of the included information. Without prior notification, Silicon Labs may update product firmware during the manufacturing process for security or reliability reasons. Such changes will not alter the specifications or the performance of the product. Silicon Labs shall have no liability for the consequences of use of the information supplied in this document. This document does not imply or expressly grant any license to design or fabricate any integrated circuits. The products are not designed or authorized to be used within any FDA Class III devices, applications for which FDA premarket approval is required or Life Support Systems without the specific written consent of Silicon Labs. A "Life Support System" is any product or system intended to support or sustain life and/or health, which, if it fails, can be reasonably expected to result in significant personal injury or death. Silicon Labs products are not designed or authorized for military applications. Silicon Labs products shall under no circumstances be used in weapons of mass destruction including (but not limited to) nuclear, biological or chemical weapons, or missiles capable of delivering such weapons. Silicon Labs disclaims all express and implied warranties and shall not be responsible or liable for any injuries or damages related to use of a Silicon Labs product in such unauthorized applications.

### Trademark Information

Silicon Laboratories Inc.®, Silicon Laboratories®, Silicon Labs®, SiLabs® and the Silicon Labs logo®, Bluegiga®, Bluegiga Logo®, ClockBuilder®, CMEMS®, DSPLL®, EFM®, EFM32®, EFR®, Ember®, Energy Micro, Energy Micro logo and combinations thereof, "the world's most energy friendly microcontrollers", Ember®, EZLink®, EZRadio®, EZRadioPRO®, Gecko®, Gecko OS, Gecko OS Studio, ISOModem®, Precision32®, ProSLIC®, Simplicity Studio®, SiPHY®, Telegesis, the Telegesis Logo®, USBXpress®, Zentri, the Zentri logo and Zentri DMS, Z-Wave®, and others are trademarks or registered trademarks of Silicon Labs. ARM, CORTEX, Cortex-M3 and THUMB are trademarks or registered trademarks of ARM Holdings. Keil is a registered trademark of ARM Limited. Wi-Fi is a registered trademark of the Wi-Fi Alliance. All other products or brand names mentioned herein are trademarks of their respective holders.



Silicon Laboratories Inc.  
400 West Cesar Chavez  
Austin, TX 78701  
USA

<http://www.silabs.com>