

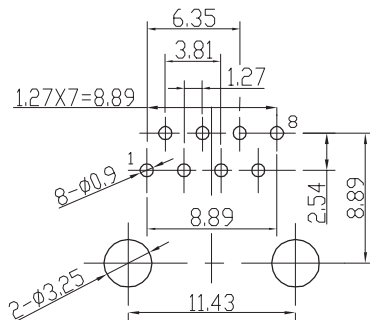
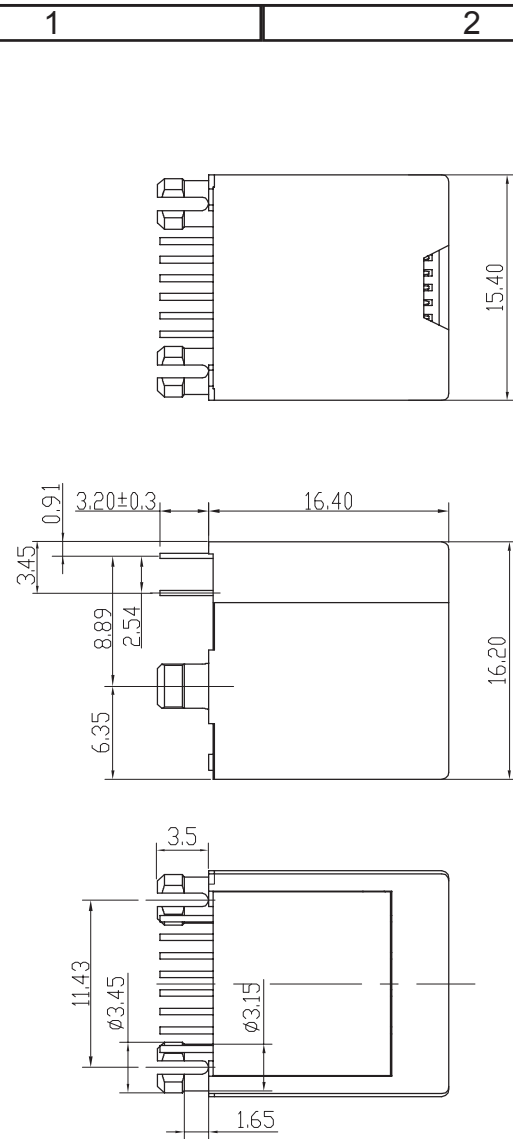




PCB LAYOUT - COMPONENT VIEW

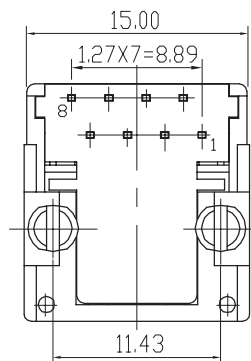

TECHNICAL CHARACTERISTICS

MATERIAL
INSULATOR MATERIAL: PBT
FLAMMABILITY RATING UL94-V0
COLOUR: BLACK
CONTACT MATERIAL: COPPER ALLOY
CONTACT TYPE: STAMPED
CONTACT PLATING: SELECTIVE GOLD
QUALITY CLASS: 500 MATING CYCLES


ENVIRONMENTAL
OPERATING TEMPERATURE: -25 °C UP TO 85 °C
COMPLIANCE: LEAD FREE AND ROHS

ELECTRICAL
CURRENT RATING: 1.5 A
WORKING VOLTAGE: 120 VAC
INSULATION RESISTANCE: >500 MOHM
DIELECTRIC WITHSTANDING VOLTAGE: 1 000 VAC/MN
CONTACT RESISTANCE: 20 mOHM MAX

STANDARD
CERTIFIED: E324776 / MODEL NUMBER 615-V2

SOLDERING
WAVE PROCESS ONLY

PACKAGING
TRAY

RoHS Compliant							
G	22-JUN-12	STD	GG	PROJECTION: 	GENERAL TOLERANCE .X = $\pm$ 0.2 .XX = $\pm$ 0.15		
F	07-MAY-10	NEW DRAW	JP				
E	17-DEC-09	DIMENSION	JP				
D	27-JUL-09	UL STANDARD	JP				
C	17-APR-08	PIN POSITION	CH	APPROVAL: RJ	UNIT: MM	DESCRIPTION: VERTICAL PLASTIC 8P8C MODULAR JACK	SIZE A4
B	05-DEC-07	MODIFICATIONS	CH		SCALE:		
A	20-NOV-07	PDF	EC		SHEET: 1/1	WERI PART NO: 615 008 138 021	
REV	DATE	FILE	BY		DRAW:		