



- NOTES:
- 1.0 ELECTRICAL SPECIFICATIONS:
- 1.1 FREQUENCY RANGE: 4.0 to 8.0 GHz
- 1.2 FREQ. SENSITIVITY: ±0.75dB
- 1.3 COUPLING: SEE TABLE
- 1.4 VSWR (MAX): 1.30:1
- 1.5 INSERTION LOSS (EXC. COUPLED POWER):
0.50dB MAX.
- 1.6 DIRECTIVITY: 18dB MIN.
- 1.7 POWER: SEE TABLE
- 1.8 RF IMPEDANCE: 50 OHMS
- 1.9 WEIGHT (MAX.): 6.8 oz.

- 2.0 FINISHING:
- 2.1 GREY OVER MIL-E-15090 TYPE II, CLASS 2
OVER MIL-C-5541 CLASS 3A
MEETS MIL-F-14072
MEETS MIL-E-5400 AND MIL-E-16400V.
- 2.2 MARK UNIT AS SHOWN.
(REF.: SLK-08139-82-[12-15])
- 3.0 DIMENSIONS IN PARENTHESIS
ARE IN MILLIMETERS.

CPL-5214-30-TNC-79	30dB	50	50	4,000
CPL-5214-20-TNC-79	20dB	50	50	4,000
CPL-5214-10-TNC-79	10dB	50	10	4,000
CPL-5214-06-TNC-79	6dB	50	4	4,000
CPL-5214-XX-TNC-79 MODEL NUMBER	-XX ±1.0dB COUPLING	INPUT	REF.	PEAK
		POWER (WATTS)		

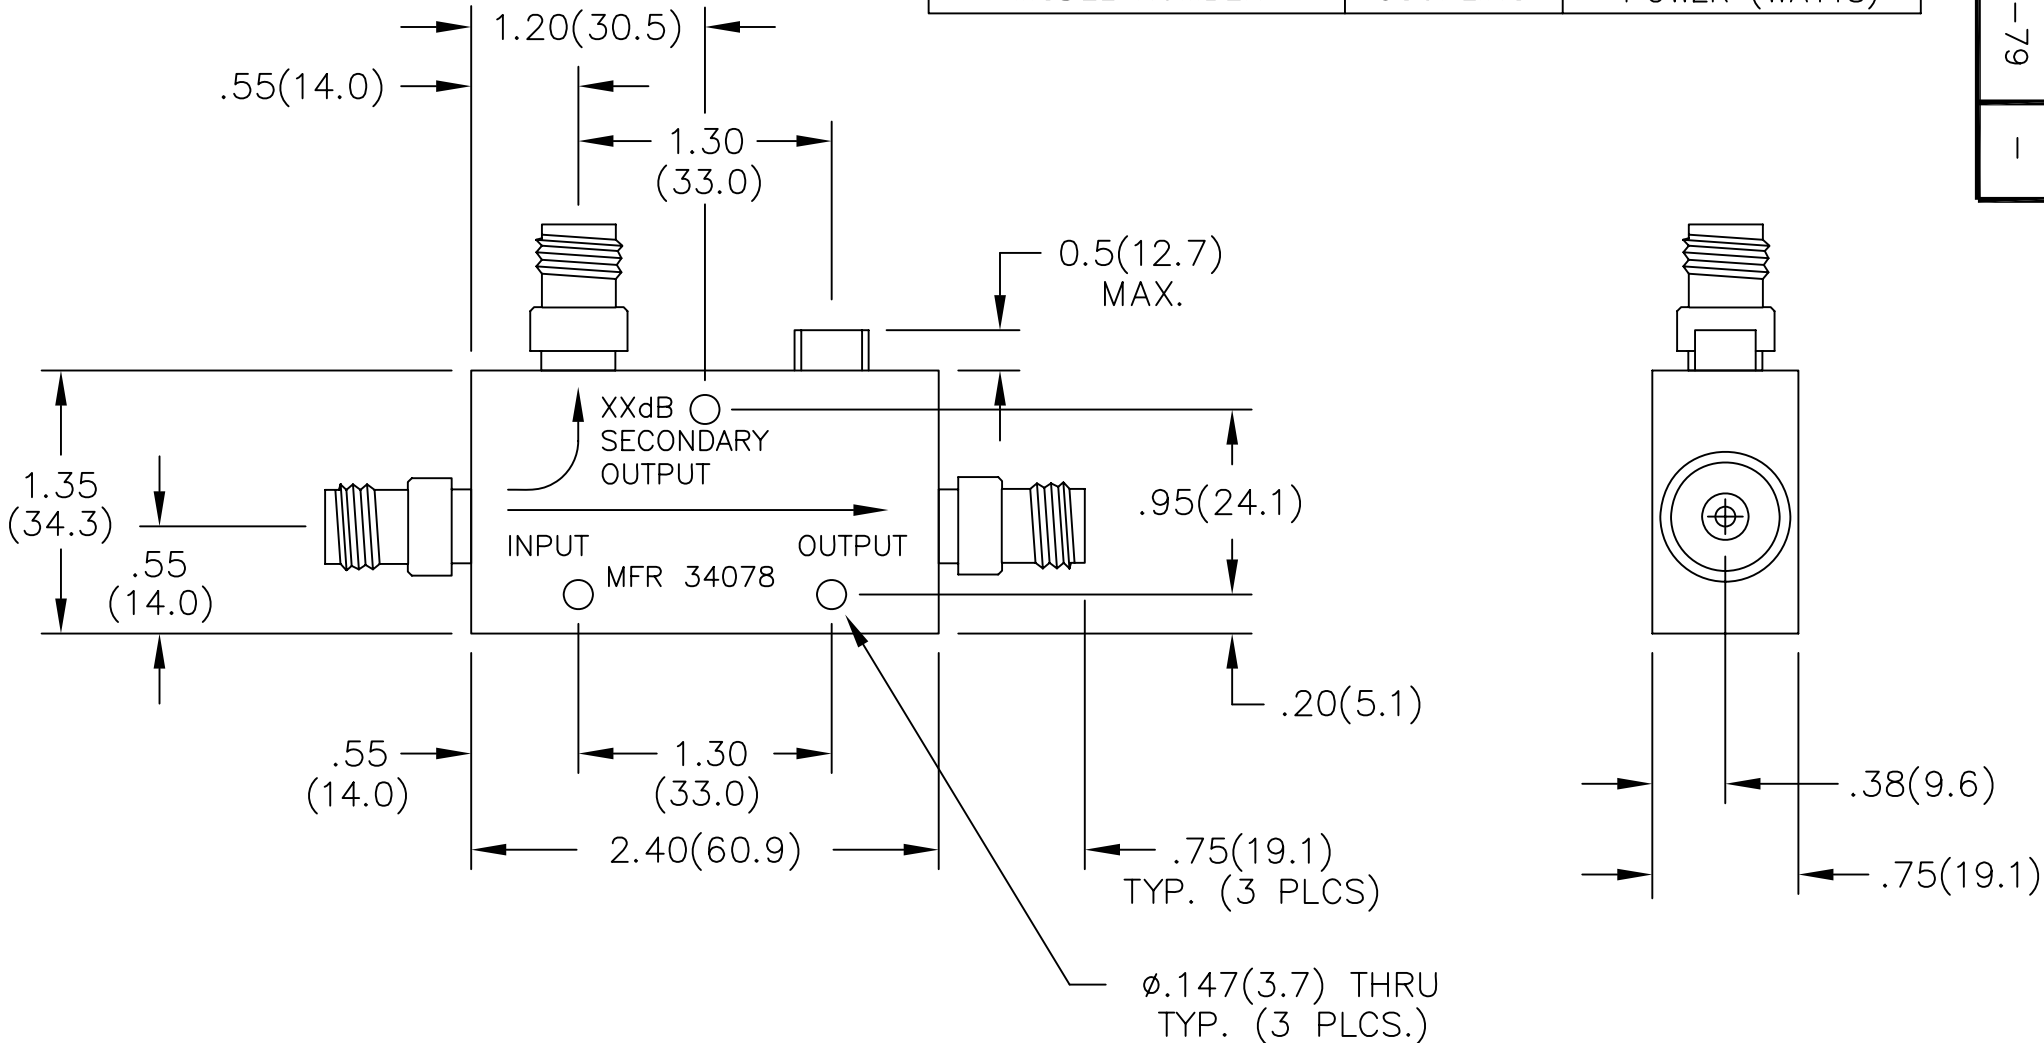

TYPE TNCA JACK
INTERFACE PER
MIL-STD-348A
FIG. 313-44
(INTERFACE ALSO
MEETS TYPE TNC
18 GHz, GRADE 1
PER IEC 169-26,
FIG 2) TYP.
(3 PLCS.)

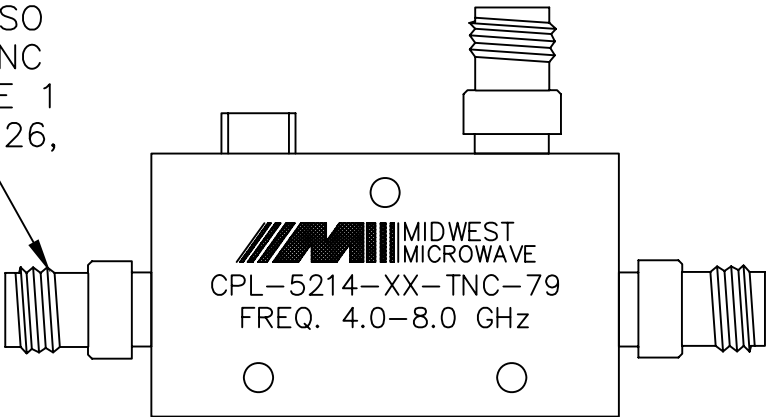

UNLESS OTHERWISE NOTED DIMENSIONS ARE IN INCHES AND TOLERANCES ARE:	FSCM NO. 34078	MIDWEST MICROWAVE	
	NOTICE: The information contained in this drawing is proprietary and must not be used without the permission of Midwest Microwave		TITLE DIRECTIONAL COUPLER
	DRAWN/DATE S.ORLOV 5/9/06	ENG./DATE R.HALL 5/9/06	DRAWING NUMBER CPL-5214-XX-TNC-79
	CHECKED/DATE	APPROVED/DATE	SCALE: 1=1 SHEET 1 of 1