

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number:

0761451726

Status:


Active

Overview:

Impact™ Backplane Connectors and Cable Assemblies

Description:

Impact™ 100 Ohm 6 Pair Vertical Backplane Header, Unguided, Dual Endwall, 14 Columns, 252 Circuits, Pin Length 4.50mm, Plated Through Hole Dimension 0.39mm, Lead-Free

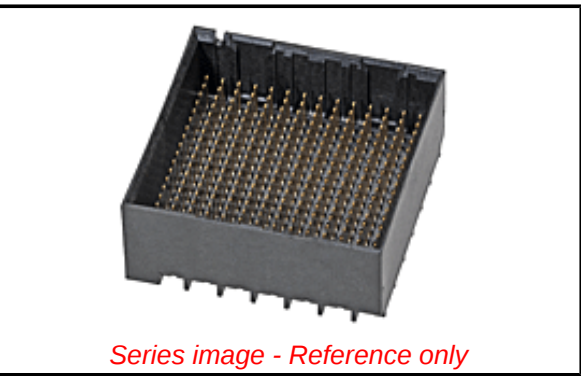

|                                                          |                                                              |
|----------------------------------------------------------|--------------------------------------------------------------|
| Documents:                                               |                                                              |
| <a href="#">3D Model</a>                                 | <a href="#">Application Specification AS-76060-990 (PDF)</a> |
| <a href="#">Drawing (PDF)</a>                            | <a href="#">Packaging Specification PK-70873-7703 (PDF)</a>  |
| <a href="#">Product Specification PS-76060-999 (PDF)</a> | <a href="#">RoHS Certificate of Compliance (PDF)</a>         |

|                                |                                                   |
|--------------------------------|---------------------------------------------------|
| Agency Certification           |                                                   |
| UL                             | E29179                                            |
| General                        |                                                   |
| Product Family                 | Backplane Connectors                              |
| Series                         | 76145                                             |
| Application                    | Conventional                                      |
| Application Tooling Documents  | TM-622018799                                      |
| Component Type                 | PCB Header                                        |
| Overview                       | Impact™ Backplane Connectors and Cable Assemblies |
| Product Name                   | Impact™                                           |
| UPC                            | 884982938632                                      |
| Physical                       |                                                   |
| Circuits (Loaded)              | 252                                               |
| Circuits (maximum)             | 252                                               |
| Color - Resin                  | Black                                             |
| Durability (mating cycles max) | 200                                               |
| First Mate / Last Break        | No                                                |
| Flammability                   | 94V-0                                             |
| Guide to Mating Part           | No                                                |
| Keying to Mating Part          | None                                              |
| Material - Metal               | High Performance Alloy (HPA)                      |
| Material - Plating Mating      | Gold                                              |
| Material - Plating Termination | Tin                                               |
| Material - Resin               | High Temperature Thermoplastic                    |
| Net Weight                     | 5.965/g                                           |
| Number of Columns              | 14                                                |
| Number of Pairs                | 6                                                 |
| Number of Rows                 | 18                                                |
| Orientation                    | Vertical                                          |
| PC Tail Length                 | 1.40mm                                            |
| PCB Locator                    | No                                                |
| PCB Retention                  | None                                              |
| PCB Thickness - Recommended    | 1.00mm                                            |
| Packaging Type                 | Tray                                              |
| Pitch - Mating Interface       | 1.90mm                                            |
| Pitch - Termination Interface  | 1.90mm                                            |
| Plating min - Mating           | 0.762µm                                           |
| Polarized to PCB               | No                                                |
| Stackable                      | No                                                |
| Temperature Range - Operating  | -55°C to +85°C                                    |
| Termination Interface: Style   | Through Hole - Compliant Pin                      |
| Electrical                     |                                                   |

EU ELV

Not Relevant

EU RoHS

Compliant

China RoHS

REACH SVHC

Not Contained Per

-ED/79/2015 (17

December 2015)

Halogen-Free

Status

Low-Halogen

Need more information on product

environmental compliance?

Email [productcompliance@molex.com](mailto:productcompliance@molex.com)

Please visit the [Contact Us](#) section for any

non-product compliance questions.

China ROHS

ELV

Green Image

Not Relevant

Search Parts in this Series

76145 Series

Mates With

76150 Impact™ 100 Ohm Daughtercard

Use With

75234 Backplane Free Standing Guide Pin

Application Tooling | FAQ

Tooling specifications and manuals are

found by selecting the products below.

Crimp Height Specifications are then

contained in the Application Tooling

Specification document.

Global

Description

Product #

Press-In Tool for 6-

Pair by 14-Column

Backplane

0622018639

|                                    |                 |                                                                                                                        |
|------------------------------------|-----------------|------------------------------------------------------------------------------------------------------------------------|
| Current - Maximum per Contact      | 0.75A           | Backplane Header <u>0621009610</u><br>Removal Tool for<br>GbX® U-Series, GbX<br>I-Trac™, Impact™,<br>or Z-PACK Tinman* |
| Data Rate                          | 25.0 Gbps       |                                                                                                                        |
| Impedance                          | 100#            |                                                                                                                        |
| Shield Type                        | N/A             |                                                                                                                        |
| Shielded                           | No              |                                                                                                                        |
| Voltage - Maximum                  | 30V AC (RMS)/DC |                                                                                                                        |
| <b>Solder Process Data</b>         |                 |                                                                                                                        |
| Lead-freeProcess Capability        | N/A             |                                                                                                                        |
| <b>Material Info</b>               |                 |                                                                                                                        |
| <b>Reference - Drawing Numbers</b> |                 |                                                                                                                        |
| Application Specification          | AS-76060-990    |                                                                                                                        |
| Packaging Specification            | PK-70873-7703   |                                                                                                                        |
| Product Specification              | PS-76060-999    |                                                                                                                        |
| Sales Drawing                      | SD-76145-001    |                                                                                                                        |
| Symbol/Footprint Data              | SYM-76145-1726  |                                                                                                                        |

This document was generated on 06/09/2016

PLEASE CHECK [WWW.MOLEX.COM](http://WWW.MOLEX.COM) FOR LATEST PART INFORMATION