
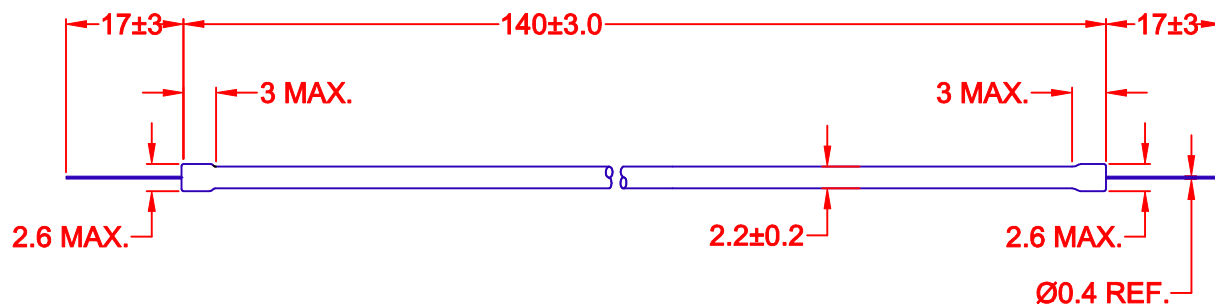


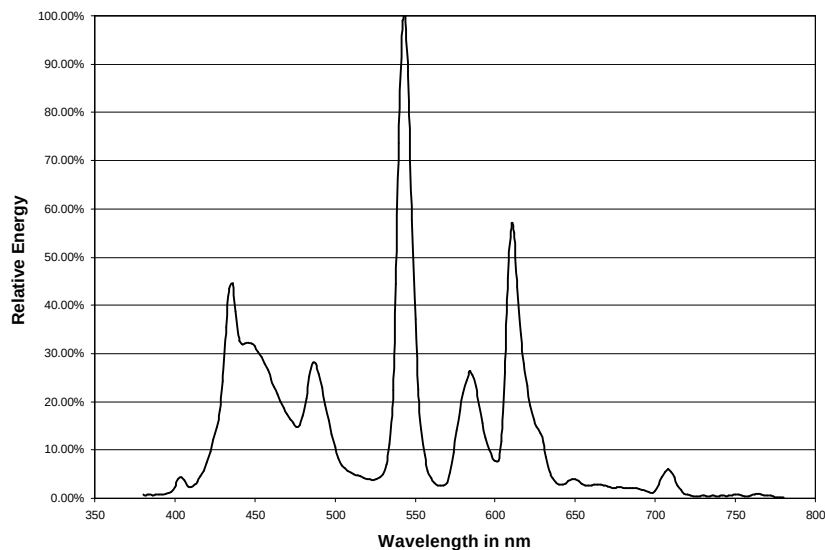

JKL LAMP PART NUMBER	COLOR	STARTING CIRCUIT VOLTAGE VS (Vrms)	OPERATING LAMP VOLTAGE VL (Vrms)	OPERATING LAMP CURRENT IL (mAmps)	BRIGHTNESS (CANDELA/m2)	*RATED LIFE (HRS)
BF22140-24B	LCD HIGH OUTPUT WHITE 8400°k RGB	730 @ 0°C	340	5	38,000 ± 10%	20,000

* RATED LIFE IS DEFINED AS THE POINT AT WHICH THE INTENSITY BECOMES 50% OF THE INITIAL RATING.

			METRIC THIRD ANGLE PROJECTION		DIMENSIONS ARE IN MILLIMETERS TOLERANCE UNLESS OTHERWISE SPECIFIED 1 PL +/- 0.2 2 PL +/- 0 ANGLE +/- 0		JKL COMPONENTS CORPORATION			
			DRAWN BY L. WENGSTROM		APPVD BY DATE FD 10/17/00		TITLE MINIATURE COLD CATHODE FLUORESCENT LAMP			
A			DIM LINE CORRECT. AND 140 +/- 5.0 TO 140 +/- 3.0		10/17/00		SIZE A			
RELEASED			6/7/00				FSCM NO. 55335			
REV. NO.			DESCRIPTION/ECO NUMBER		APPVD DATE		DRAWING NO. BF22140-24B			
							SCALE NONE			
							RELEASED DATE 6/7/00			
							REVISION DATE 10/17/00			
							REV. NO. A			
							SHEET 1 OF 1			