
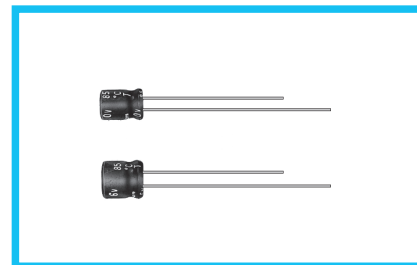


UMA

5mmL, Standard, For General Purposes

Anti-Solvent  
Feature


- Standard series with 5mm height.
- Compliant to the RoHS directive (2011/65/EU, (EU)2015/863).

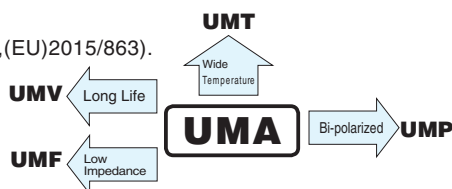

## Specifications


| Item                          | Performance Characteristics                                                                                                                                                                                                            |                 |             |             |             |             |             |    |                             |  |                                                                                |  |  |  |  |  |
|-------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------|-------------|-------------|-------------|-------------|-------------|----|-----------------------------|--|--------------------------------------------------------------------------------|--|--|--|--|--|
| Category Temperature Range    | -40 to +85°C                                                                                                                                                                                                                           |                 |             |             |             |             |             |    |                             |  |                                                                                |  |  |  |  |  |
| Rated Voltage Range           | 4 to 50V                                                                                                                                                                                                                               |                 |             |             |             |             |             |    |                             |  |                                                                                |  |  |  |  |  |
| Rated Capacitance Range       | 1 to 470μF                                                                                                                                                                                                                             |                 |             |             |             |             |             |    |                             |  |                                                                                |  |  |  |  |  |
| Rated Capacitance Tolerance   | ±20% at 120Hz, 20°C                                                                                                                                                                                                                    |                 |             |             |             |             |             |    |                             |  |                                                                                |  |  |  |  |  |
| Leakage Current               | After 2 minutes' application of rated voltage at 20°C, leakage current is not more than 0.01CV or 3(μA), whichever is greater.                                                                                                         |                 |             |             |             |             |             |    |                             |  |                                                                                |  |  |  |  |  |
| Tangent of loss angle (tan δ) | Measurement frequency : 120Hz at 20°C                                                                                                                                                                                                  |                 |             |             |             |             |             |    |                             |  |                                                                                |  |  |  |  |  |
|                               | Rated voltage (V)                                                                                                                                                                                                                      | 4               | 6.3         | 10          | 16          | 25          | 35          | 50 | Figures in ( ) are for UMR. |  |                                                                                |  |  |  |  |  |
| tan δ (MAX.)                  | 0.35                                                                                                                                                                                                                                   | 0.24 (0.30)     | 0.20 (0.24) | 0.16 (0.20) | 0.14 (0.18) | 0.12 (0.16) | 0.10 (0.13) |    |                             |  |                                                                                |  |  |  |  |  |
| Stability at Low Temperature  | Measurement frequency : 120Hz                                                                                                                                                                                                          |                 |             |             |             |             |             |    |                             |  |                                                                                |  |  |  |  |  |
|                               | Rated voltage (V)                                                                                                                                                                                                                      |                 | 4           | 6.3         | 10          | 16          | 25          | 35 | 50                          |  |                                                                                |  |  |  |  |  |
|                               | Impedance ratio (MAX.)                                                                                                                                                                                                                 | Z-25°C / Z+20°C | 7           | 4           | 3           | 2           | 2           | 2  | 2                           |  |                                                                                |  |  |  |  |  |
| Z-40°C / Z+20°C               |                                                                                                                                                                                                                                        | 15              | 8           | 6           | 4           | 4           | 3           | 3  |                             |  |                                                                                |  |  |  |  |  |
| Endurance                     | The specifications listed at right shall be met when the capacitors are restored to 20°C after the rated voltage is applied for 2000 hours at 85°C.                                                                                    |                 |             |             |             |             |             |    |                             |  |                                                                                |  |  |  |  |  |
|                               |                                                                                                                                                                                                                                        |                 |             |             |             |             |             |    | Capacitance change          |  | Within ±20% of the initial capacitance value (UMR & φ 3 product : Within ±25%) |  |  |  |  |  |
|                               |                                                                                                                                                                                                                                        |                 |             |             |             |             |             |    | tan δ                       |  | 200% or less than the initial specified value                                  |  |  |  |  |  |
| Shelf Life                    | After storing the capacitors under no load at 85°C for 1000 hours and then performing voltage treatment based on JIS C 5101-4 clause 4.1 at 20°C, they shall meet the specified values for the endurance characteristics listed above. |                 |             |             |             |             |             |    |                             |  |                                                                                |  |  |  |  |  |
|                               |                                                                                                                                                                                                                                        |                 |             |             |             |             |             |    | Leakage current             |  | Less than or equal to the initial specified value                              |  |  |  |  |  |
| Marking                       | Printed with white color letter on black sleeve.                                                                                                                                                                                       |                 |             |             |             |             |             |    |                             |  |                                                                                |  |  |  |  |  |

## Radial Lead Type

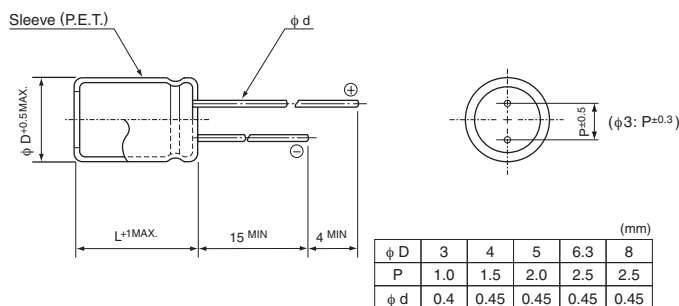

● Please refer to page 20 about the end seal configuration.

## Type numbering system (Example : 25V 10μF)

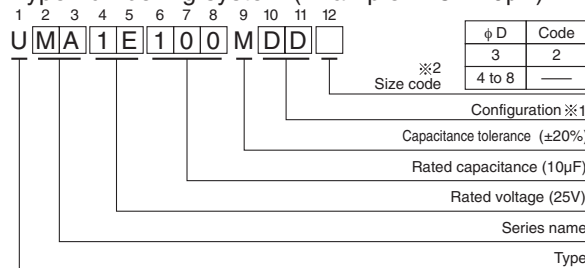

### ※ 1 Configuration

| φ D    | Pb-free leadwire<br>Pb-free PET sleeve |
|--------|----------------------------------------|
| 3      | CD                                     |
| 4 to 8 | DD                                     |

※ 2 In case at φ 3 units, put [2] as size code.

## Dimensions

| V        | 4   | 6.3      | 10             | 16             | 25             | 35           | 50                  |
|----------|-----|----------|----------------|----------------|----------------|--------------|---------------------|
| Cap.(μF) | 0G  | 0J       | 1A             | 1C             | 1E             | 1V           | 1H                  |
| 1        | 010 |          |                |                |                |              | 4×5(3×5) 8.4(8.0)   |
| 2.2      | 2R2 |          |                |                |                |              | ● 4×5 13(10)        |
| 3.3      | 3R3 |          |                |                |                |              | 4×5 17              |
| 4.7      | 4R7 |          |                |                |                |              | 5×5 20              |
| 10       | 100 | 3×5 15   |                | ● 4×5 23(18)   | 5×5 27         | 5×5 29       | 6.3×5 33            |
| 22       | 220 | 3×5 19   | ● 4×5 28(21)   | 5×5 33         | 5×5 37         | 6.3×5 42     | 6.3×5 46            |
| 33       | 330 | 4×5 28   | 5×5 37         | 5×5 41         | ○ 6.3×5 49(43) | 6.3×5 52     | □ 8×5 62(52)        |
| 47       | 470 | 4×5 33   | 5×5 45         | ○ 6.3×5 52(43) | 6.3×5 58       | □ 8×5 70(62) | 8×5 80              |
| 100      | 101 | 5×5 56   | ○ 6.3×5 70(68) | □ 8×5 80(76)   | □ 8×5 92(86)   | 8×5 110      |                     |
| 220      | 221 | 6.3×5 96 | □ 8×5 110(90)  | 8×5 135        |                |              |                     |
| 330      | 331 | 8×5 145  | 8×5 170        |                |                |              |                     |
| 470      | 471 | 8×5 185  |                |                |                |              |                     |
|          |     |          |                |                |                |              | Case size φD×L (mm) |
|          |     |          |                |                |                |              | Rated ripple        |

Size φ3×5 is available for capacitors marked. "●"/ Size φ5×5 is available for capacitors marked. "○"

Size φ6.3×5 is available for capacitors marked. "□" In such a case, [M][R] will be put at 2nd and 3rd digit of type numbering system.

## Frequency coefficient of rated ripple current

| Frequency   | 50 Hz | 120 Hz | 300 Hz | 1 kHz | 10kHz or more |
|-------------|-------|--------|--------|-------|---------------|
| Coefficient | 0.70  | 1.00   | 1.17   | 1.36  | 1.50          |

Rated ripple current (mA rms) at 85°C 120Hz  
( ) = φ3 units and UMR.

Please refer to page 20, 21, 22 about the formed or taped product spec.  
Please refer to page 4 for the minimum order quantity.