

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number:

0758272154

Status:

Active

Overview:

gbx_backplane_connector_system

Description:

1.85mm by 1.85mm (.073 by .073") Pitch 2-Pair GbX® Backplane Connector System, Right Guide Header, 40 Circuits, Gold (Au) 0.76µm (30µ"), Pin Length 4.55mm (.179")

Documents:

Drawing (PDF)

Product Specification PS-75221-999 (PDF)

RoHS Certificate of Compliance (PDF)

Agency Certification

UL

E29179

General

Product Family

Backplane Connectors

Series

75827

Application

Backplane

Application Tooling Documents

Tooling Manual

Comments

Left Guide Header, Keying Position E

Component Type

PCB Header

Overview

gbx_backplane_connector_system

Product Name

GbX®

Style

N/A

Physical

Circuits (Loaded)

40

Circuits (maximum)

40

Color - Resin

Gray (Dark)

Durability (mating cycles max)

200

First Mate / Last Break

No

Flammability

94V-0

Guide to Mating Part

Yes

Keying to Mating Part

Yes

Material - Metal

High Performance Alloy (HPA), Stainless Steel

Material - Plating Mating

Gold

Material - Plating Termination

Tin-Lead

Material - Resin

High Temperature Thermoplastic

Number of Columns

10

Number of Pairs

2

Number of Rows

4

Orientation

Vertical

PC Tail Length (in)

0.091 In

PC Tail Length (mm)

2.30 mm

PCB Locator

No

PCB Retention

Yes

PCB Thickness Recommended (in)

0.063 In

PCB Thickness Recommended (mm)

1.60 mm

Packaging Type

Tube

Pitch - Mating Interface (in)

0.073 In

Pitch - Mating Interface (mm)

1.85 mm

Pitch - Term. Interface (in)

0.073 In

Pitch - Term. Interface (mm)

1.85 mm

Plating min: Mating (µin)

30

Plating min: Mating (µm)

0.76

Plating min: Termination (µin)

30




image - Reference only

Series

EU RoHS

RoHS Compliant by Exemption

REACH SVHC

Not Reviewed

Halogen-Free

Status

Not Reviewed

China RoHS

50

Pb

Need more information on product environmental compliance?

Email productcompliance@molex.com

For a multiple part number RoHS Certificate of Compliance, [click here](#)

Please visit the [Contact Us](#) section for any non-product compliance questions.

Search Parts in this Series

75827Series

Mates With

75650 GbX® Daughtercard

Application Tooling | FAQ

Tooling specifications and manuals are found by selecting the products below. Crimp Height Specifications are then contained in the Application Tooling Specification document.

Global

Description

Product #

GbX® 2 Pair by 10

0622022410

Wide Differential

Insertion Tool

Plating min: Termination (μm)	0.76
Polarized to PCB	No
Stackable	No
Surface Mount Compatible (SMC)	Yes
Temperature Range - Operating	105°C
Termination Interface: Style	Through Hole - Compliant Pin

Electrical

Current - Maximum per Contact	1A
Data Rate	8.0 Gbps
Real Signals (per 25mm)	54
Shield Type	Ground Plane Shield
Shielded	Yes
Voltage - Maximum	120V AC (RMS)/DC

Material Info



Reference - Drawing Numbers

Packaging Specification	PK-70873-5058
Product Specification	PS-75221-999
Sales Drawing	SD-75827-210


GbX is a registered trademark of Amphenol Corporation.

This document was generated on 05/14/2010
PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION


20 19 18 17 16 15 14 13 12 11 75827 9 8 7 6 5 4 3 2 1

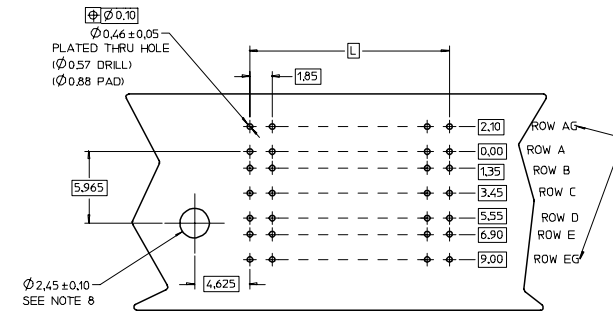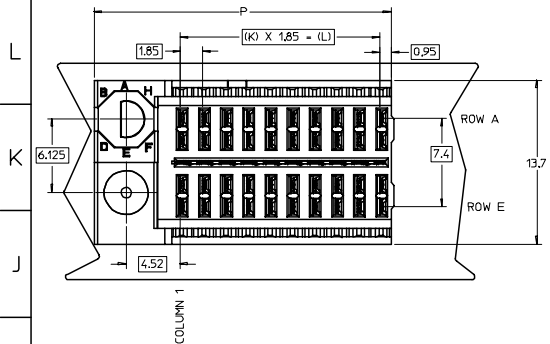

ROW AG & EG RECOMMENDED FOR ALL APPLICATIONS. THESE ROWS SHOULD BE CONNECTED TO GROUND.

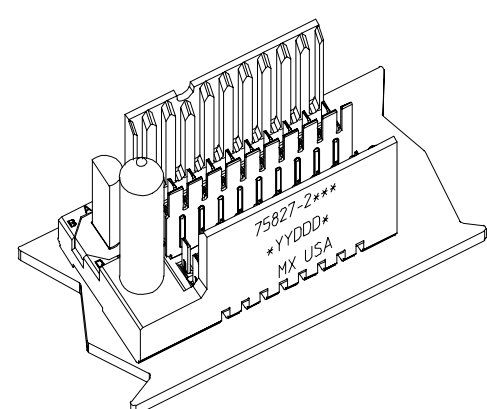




BACKPLANE HOLE PATTERN (COMPONENT SIDE-10 POS SHOWN)

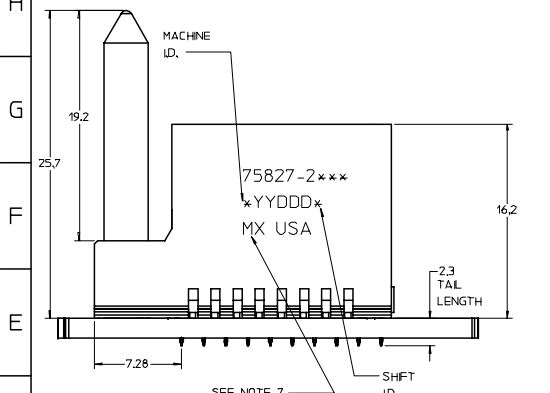


SEE NOTE 7

PART NUMBER TABLE				
ASSY PART NO.	K	L	P	TOTAL NO. OF DIFFERENTIAL PAIRS
75827-21**	9	16.65	24.78	20
75827-22**	24	44.40	52.53	50

- NOTES:
- MATERIAL: HOUSING - LIQUID CRYSTAL POLYMER (LCP) GLASS-FILLED, UL 94V-0, COLOR - GRAY, SIGNAL CONTACT AND GROUND BLADE - HIGH PERFORMANCE COPPER ALLOY.
 - FINISHES: SELECTIVE GOLD (Au) ON CONTACT AREA, SELECTIVE TIN/LEAD (Sn/Pb) ON PCB TAILS, NICKEL (Ni) OVERALL.
 - THIS PART CONFORMS TO MOLEX PRODUCT SPECIFICATION PS-75221-999.
 - FOR MIXED CONTACT MATING LENGTHS CONSULT MOLEX FOR AVAILABILITY. CONTACT PAIRS MUST BE THE SAME LENGTH.
 - FOR SPECIFIC PART NUMBER AND MATING INFORMATION PLEASE REFER TO CHART.
 - PACKAGE PER PK-70873-5058.
 - EITHER MARK PART NUMBER AND DATE CODE APPROXIMATELY WHERE SHOWN OR PLACE A LABEL ON THE TUBE.
 - OPTIONAL HOLE LOCATION FOR GROUNDED GUIDE PIN OR ADDITIONAL GUIDE PIN SUPPORT, FOR GROUNDED GUIDE, HOLE TO BE PLATED, DRILL SIZE $\phi 2.58$ PAD SIZE $\phi 5.50$.
 - THESE PARTS CONFORM TO MOLEX COSMETIC SPECIFICATION PS-45499-002 CLASS B.

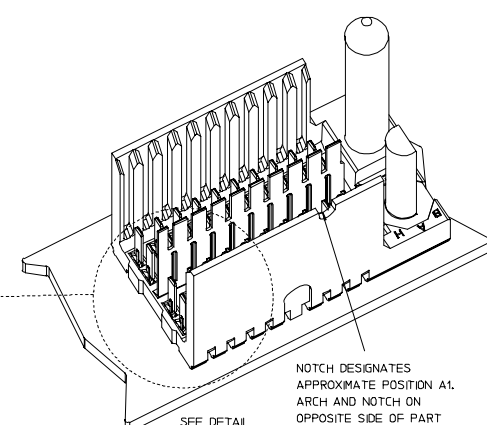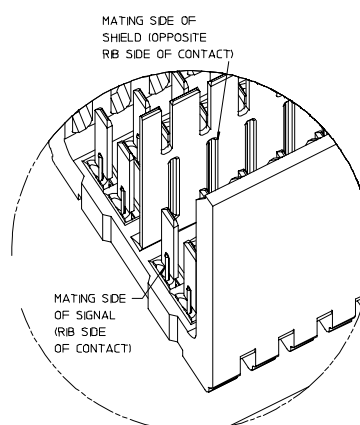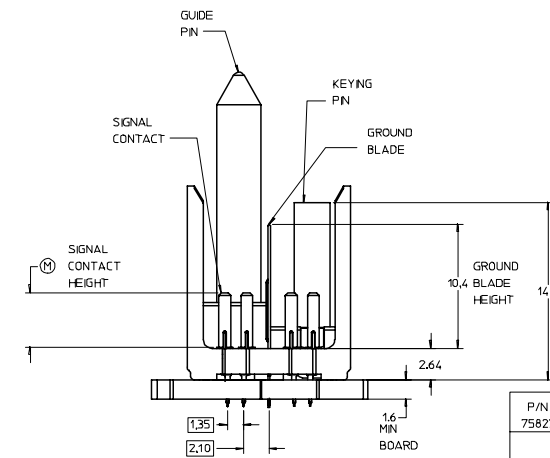

P/N 75827-1)	-**0*	-**1*	-**2*	-**3*	-**4*	-**5*	-**6*	-**7*	-**8*
KEYING PIN ORIENTATION									



REVISED EC NO: UCP2007-2580 DRAWN: JINGHAM 2007/05/02 CHKD: 2007/05/02 APPR: SREED 2007/05/02	QUALITY SYMBOLS 0 0	GENERAL TOLERANCES (UNLESS SPECIFIED) 4 PLACES ±--- 3 PLACES ±--- 2 PLACES ±--- 1 PLACE ±--- ANGULAR ±---° DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS	SCALE 5:1	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION	REVISE ON CAD ONLY	TITLE GBX 2-PAIR LEFT END BACKPLANE SALES ASSEMBLY	MATERIAL NO. SEE CHART	DOCUMENT NO. SD-75827-210	SHEET NO. 1 OF 1

19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1