310-045 Composite shrink boot adapter
MIL-DTL-38999

STANDARD PROFILE WITH SELF-LOCKING ROTATABLE COUPLING NUT

How To Order 310-045									
Sample Part Number	**310**	**F**	**S**	**045**	**XM**	**15**	**D**	**T**
Product Series	Composite shrink boot adapter							
Connector Designator	**H** = MIL-DTL-38999 Series III							
Angle	**S** = Straight							
Basic Number	**045**							
Finish	**XB** = No plating, black **XM** = Electroless Nickel **XD** = No Plating, Desert Tan **XMT** = Nickel-PTFE *1000 Hour Gray* **XW** = Cadmium O/D over Electroless Nickel							
Connector Shell Size	See Dimensions Table							
Drain Holes	**D** = Drain Holes, omit for none.							
Shrink Boot Option	**T** = Shrink Boot, omit for none.							

Composite

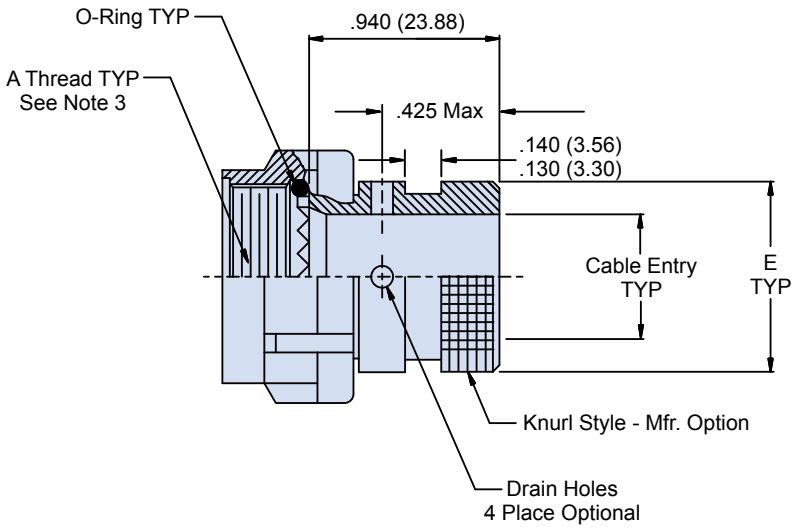

Dimensions		
H Code Shell Size	**E Max**	**Cable Entry Min.**
09	.533 (13.5)	.250 (6.4)
11	.605 (15.4)	.355 (9.0)
13	.774 (19.7)	.491 (12.5)
15	.838 (21.3)	.565 (14.4)
17	.963 (24.5)	.690 (17.5)
19	1.042 (26.5)	.769 (19.5)
21	1.217 (30.9)	.894 (22.7)
23	1.355 (34.4)	1.019 (25.9)
25	1.443 (36.7)	1.134 (28.8)

NOTES

1. (Straight) 770-001S**-0 shrink boot supplied with "T" option.
2. Coupling nut supplied unplated.
3. Refer to connector-to-backshell interface standards page in this section.

 © 2014 Glenair, Inc • 1211 Air Way, Glendale, CA 91201 • 818-247-6000 • www.glenair.com • U.S. CAGE code 06324 • Series 23® SuperNine Catalog