
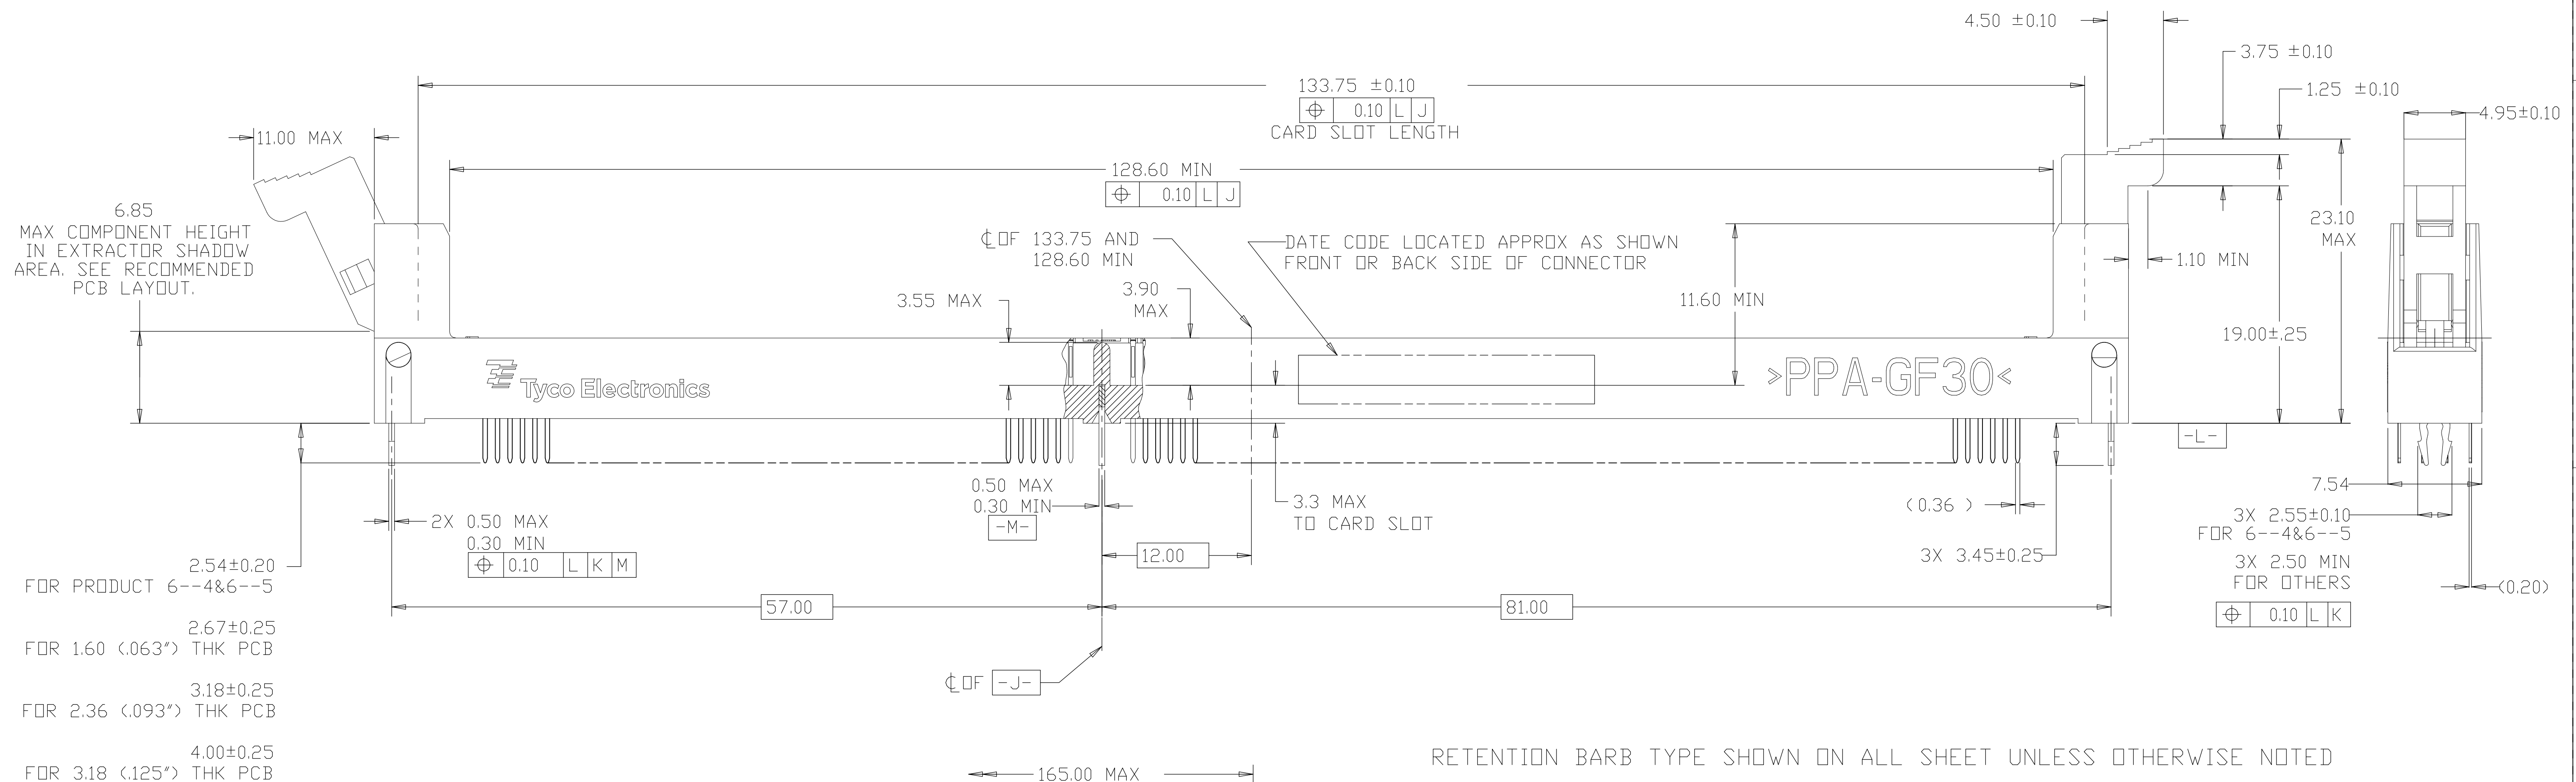


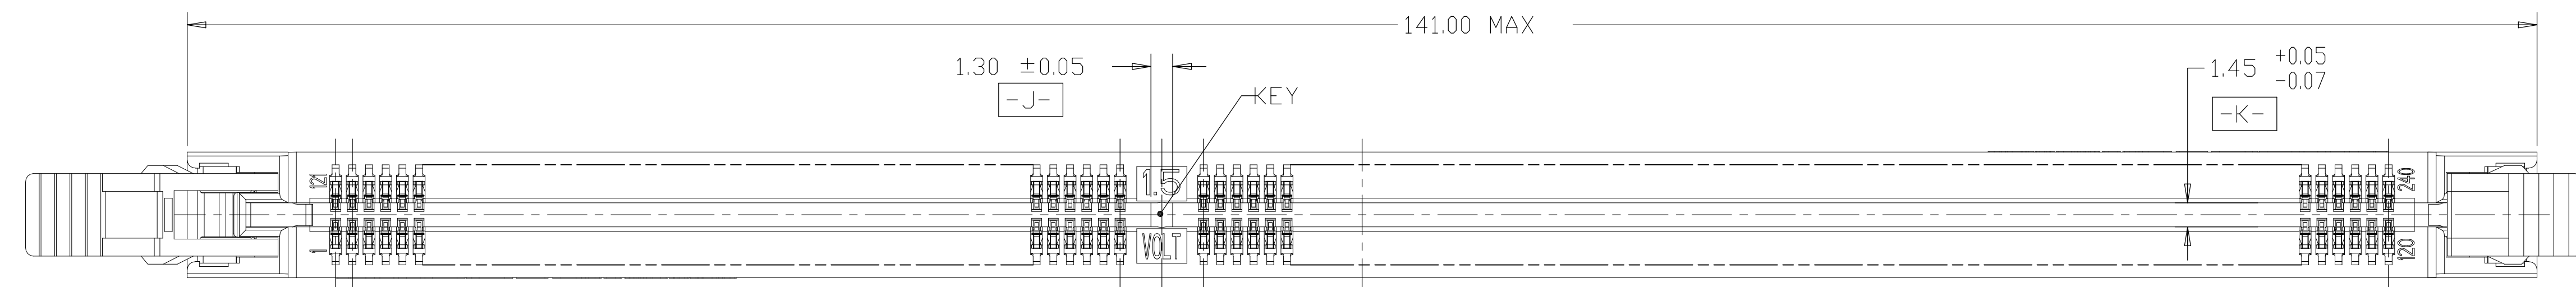

RETENTION BARB TYPE SHOWN ON ALL SHEET UNLESS OTHERWISE NOTED

 MATERIALS:

HOUSING: HIGH TEMPERATURE NYLON, UL94 V-0
EXTRACTOR: HIGH TEMPERATURE NYLON, UL94 V-0
CONTACTS: COPPER ALLOY
RETENTION BARB: BRASS, TIN PLATED

2 INTERFACE FINISH:

(1) 0.00038 MIN THK GOLD OVER 0.00127 MIN THK NICKEL.
(2) 0.00008 MIN THK GOLD OVER 0.00127 MIN THK NICKEL.
(3) 0.00076 MIN THK GOLD OVER 0.00127 MIN THK NICKEL.

△₃ FINISHED HOLE SIZE. 0.15 MAXIMUM ANNULAR RING.

4 KEEP OUT ZONE.


5 KEEP OUT AREA RESERVED FOR SOCKET EXTRACTORS, BOTH ENDS.


△6 SOLDER TAIL FINISH:

0.00300 MIN THK MATTE TIN OVER 0.00127 MIN THK NICKEL.


 LED LOCATION AS APPLICABLE PER CUSTOMER.

 DATUM -G- IS CONNECTOR SIDE SURFACE OF PCB.

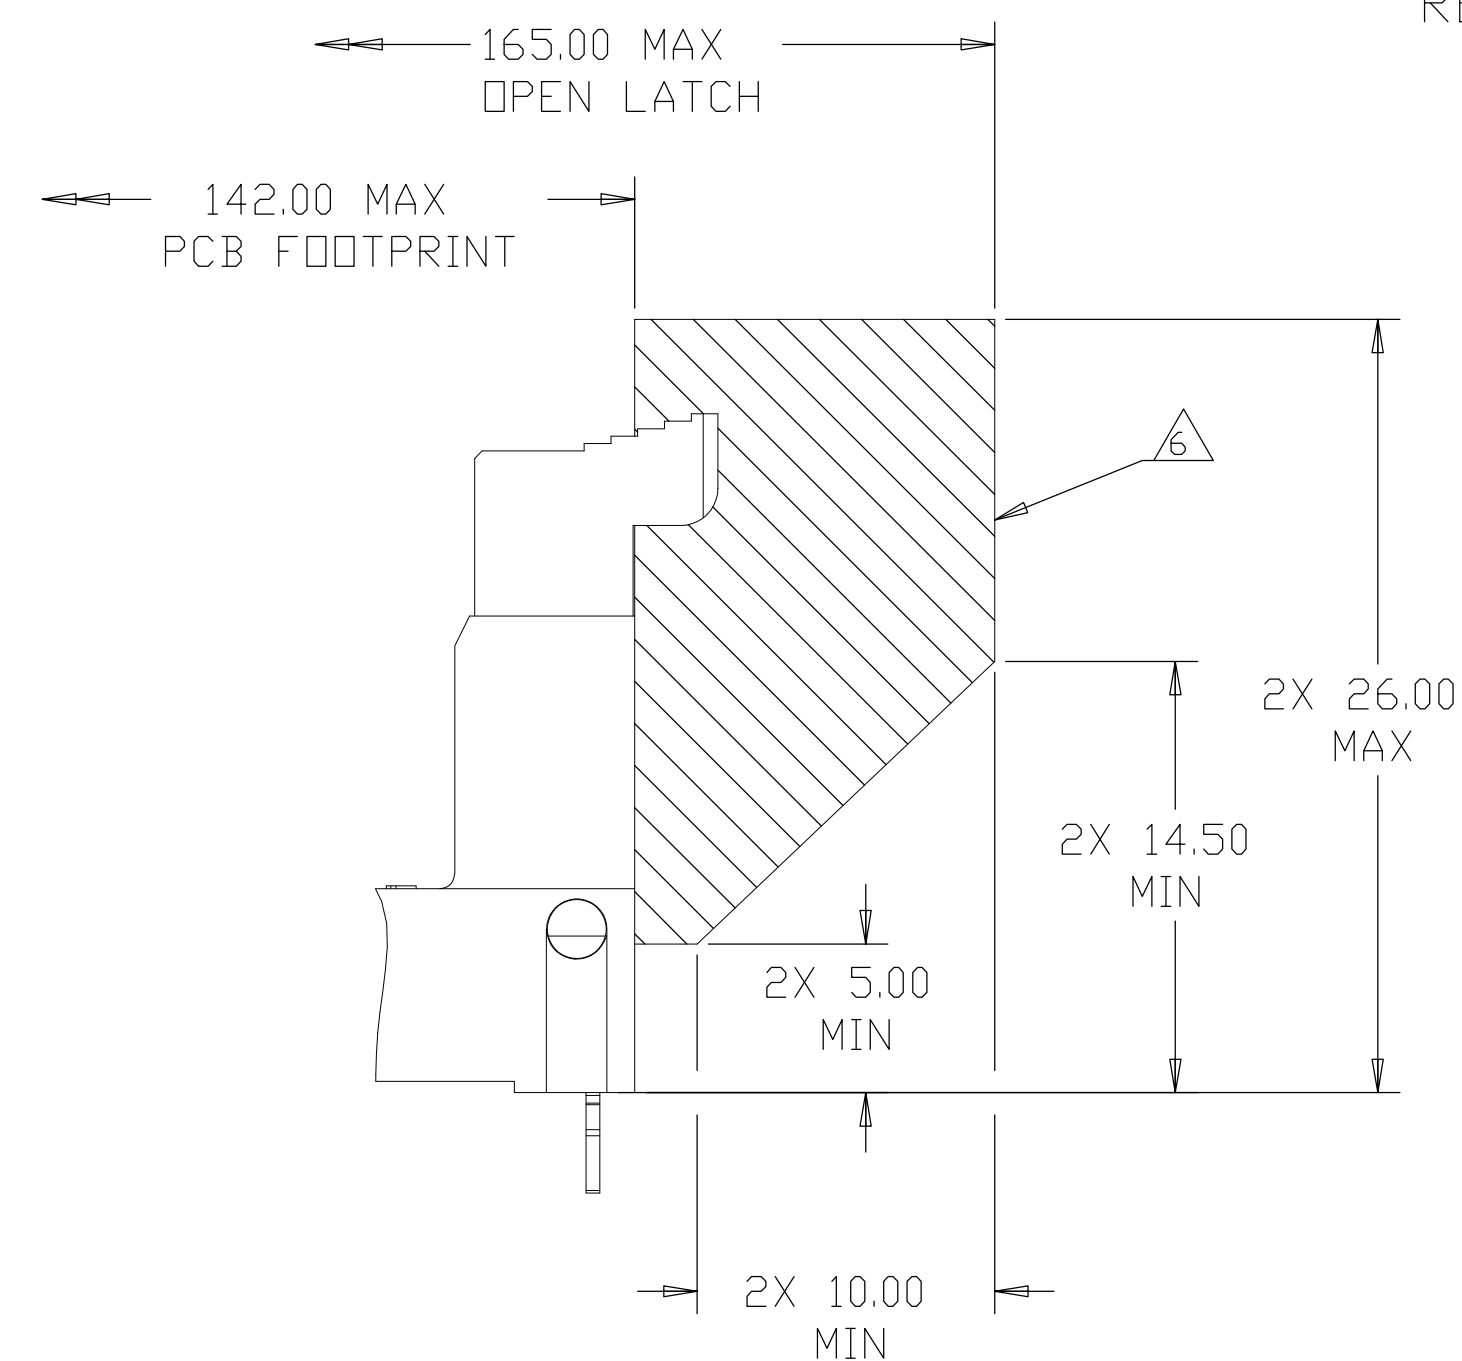



THIS DRAWING IS A CONTROLLED DOCUMENT.		DWG LEO ZHOU 28FEB2007		 TE Connectivity			
		CHK STEVEN YAO 28FEB2007					
DIMENSIONS:		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME			
mm							
		APVD STEVEN YAO 28FEB2007		SOCKET ASSEMBLY, VERTICAL DDR3 DIMM, SOLDER TAIL, 240 POSITION			
		PRODUCT SPEC					
		108-2256					
		APPLICATION SPEC					
		114-13154					
MATERIAL		WEIGHT		SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
				A1	00779	C-1932000	-
CUSTOMER DRAWING				SCALE	4:1	SHEET 1 of 4	REV H-7


LOC	DIST	REVISIONS				
ES	00	P	LTR	DESCRIPTION	DATE	APVD
		-	-	SEE SHEET 1	-	-

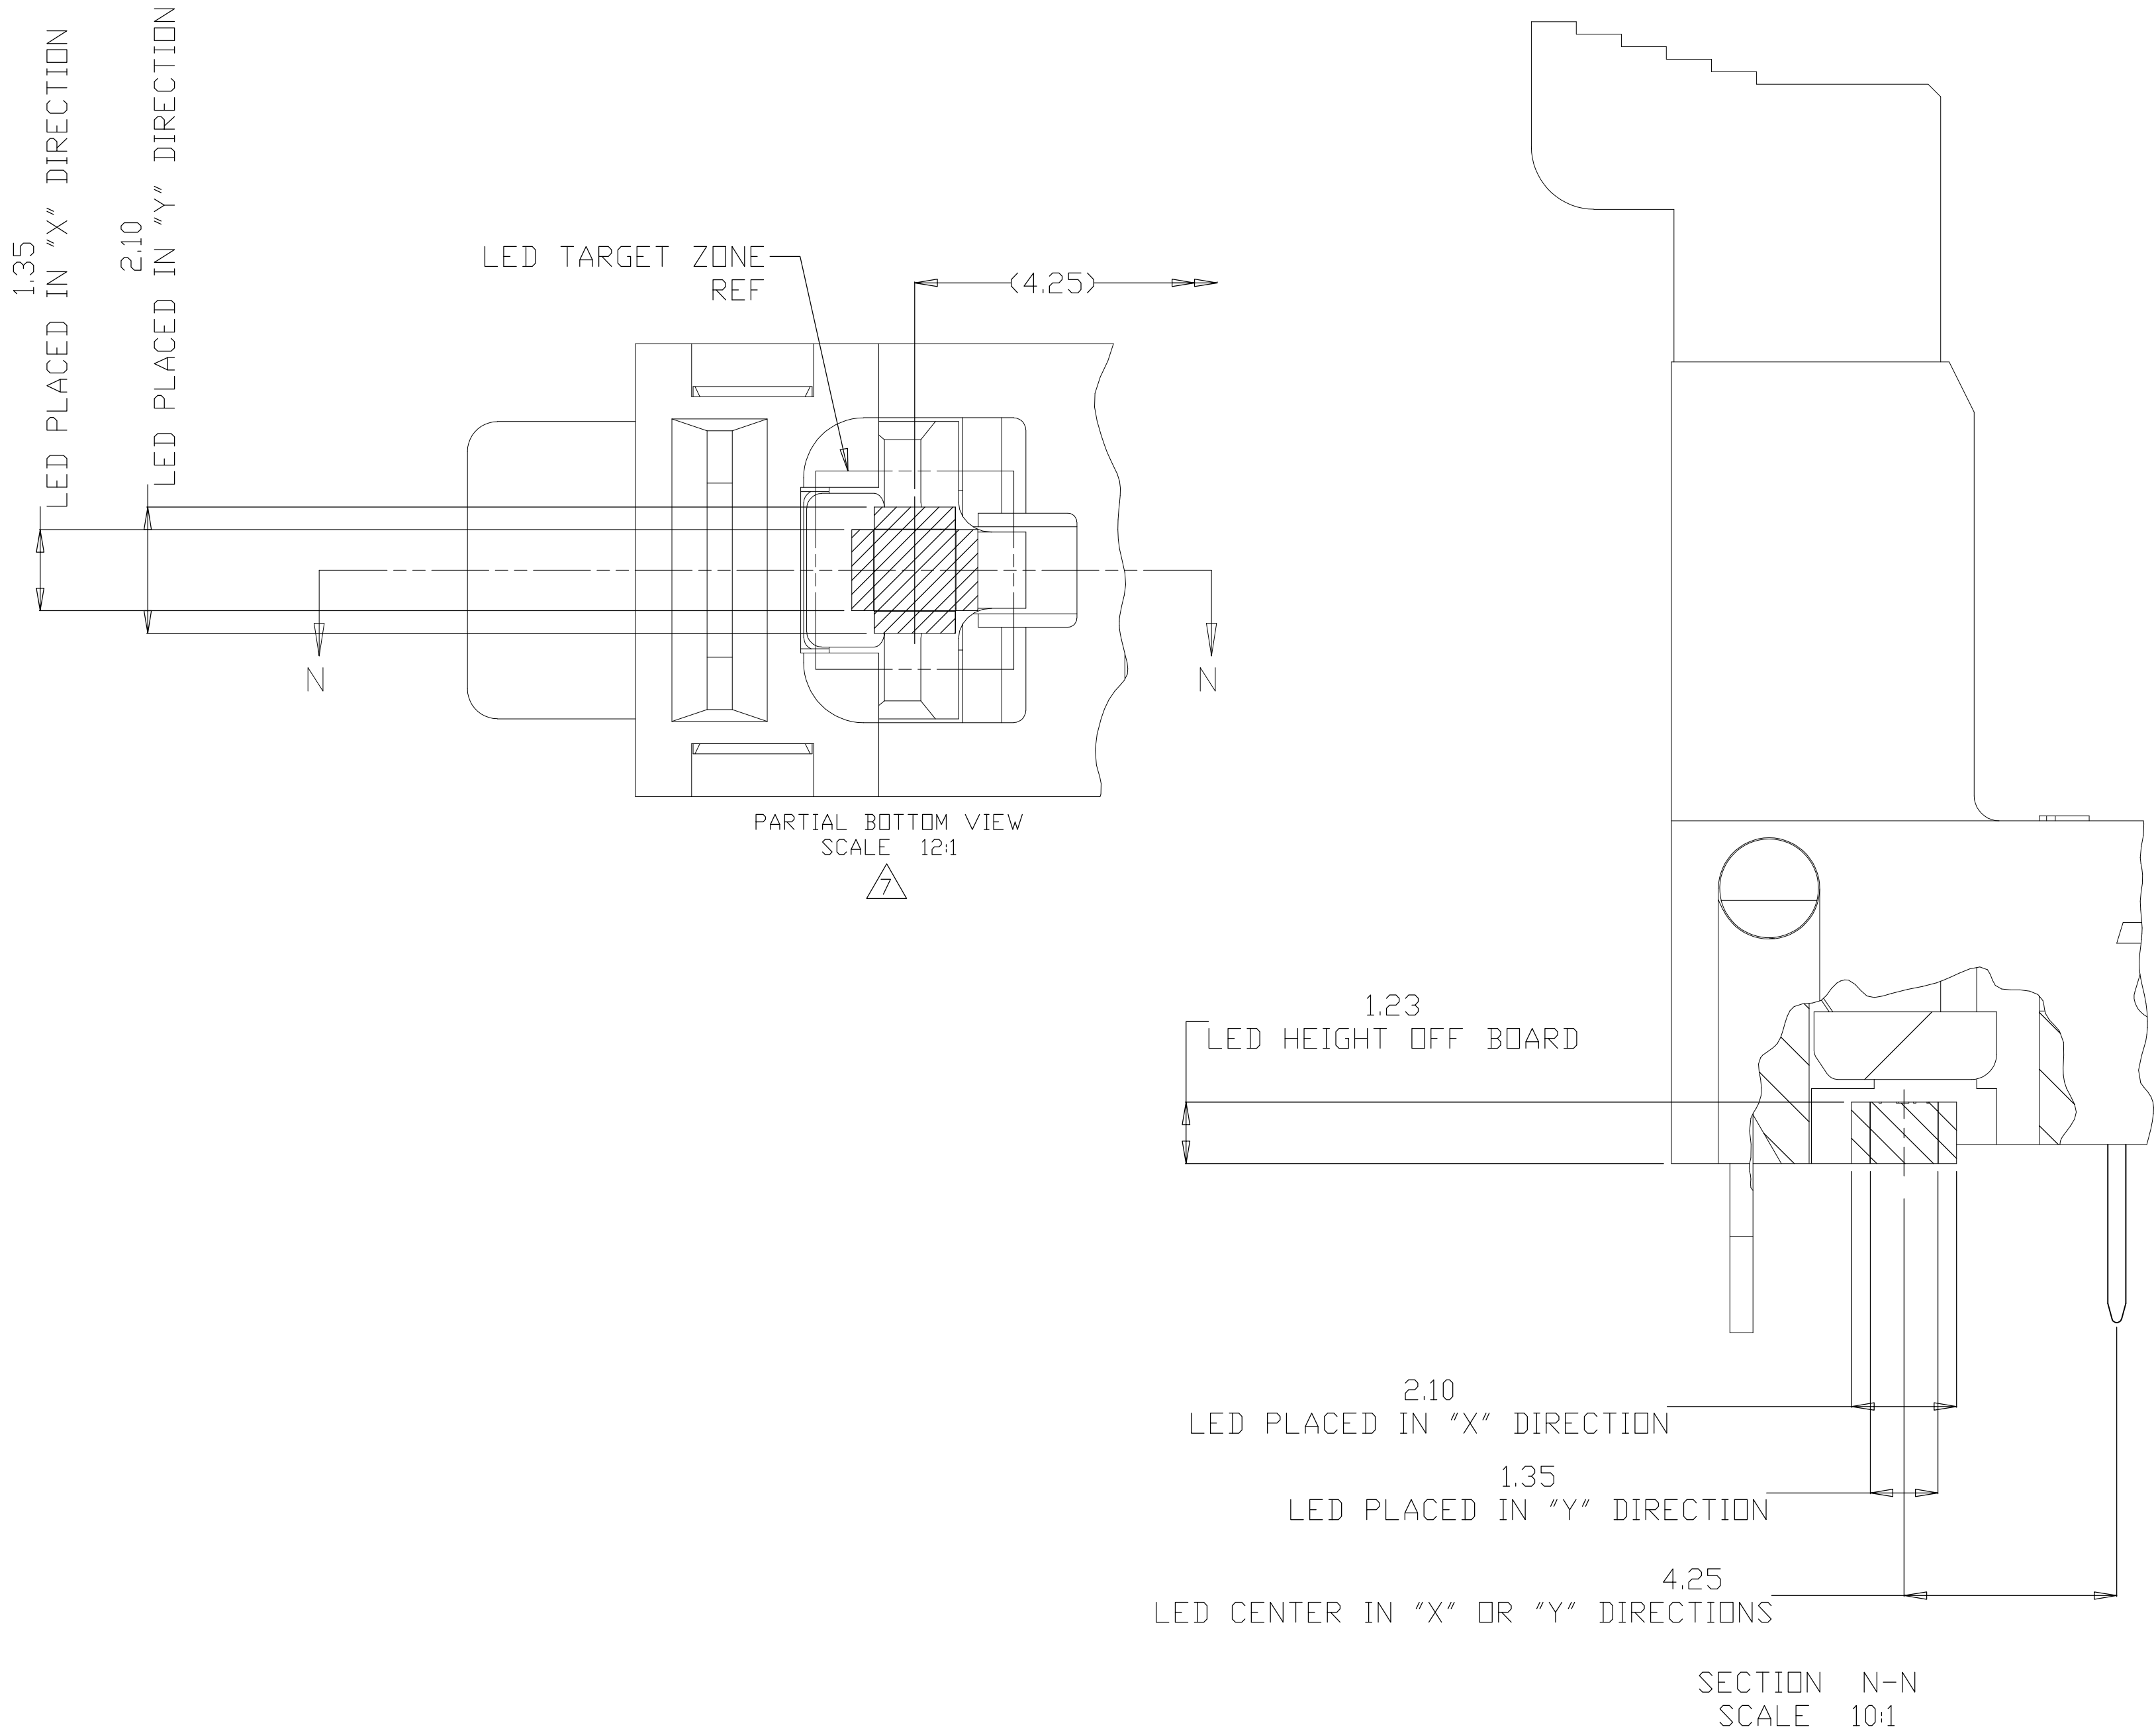

RETENTION BARB	BLACK	BLACK	0.00076 MIN (30u'')	2.54	7-1932000-6
	NATURAL			2.54	7-1932000-5
	NATURAL	BLUE<2935U>	0.00038 MIN<15u''>	2.67	7-1932000-2
	NATURAL	PINK<701C>	0.00008 MIN (3u'', FLASH)	2.54	6-1932000-5
		BLUE<284C>		2.54	6-1932000-4
	BLACK	BLACK	0.00076 MIN (30u'')	4.00	5-1932000-2
	NATURAL	BLACK		3.18	5-1932000-1
				4.00	4-1932000-8
				3.18	4-1932000-7
	NATURAL	GREEN<368C> BLUE<284C> ORANGE<021C>	0.00038 MIN (15u'')	2.67	4-1932000-6
				2.67	3-1932000-3
				2.67	2-1932000-5
	BLACK	BLACK	0.00038 MIN (15u'')	2.67	2-1932000-1
				3.18	1-1932000-7
			0.00008 MIN<3u''>	2.67	1-1932000-6
	NATURAL	BLACK	4.00	1-1932000-5	
			3.18	1-1932000-1	
			2.67	1-1932000-0	
	NATURAL	NATURAL	0.00038 MIN (15u'')	2.67	1932000-7
				4.00	1932000-6
				3.18	1932000-5
			0.00008 MIN (3u'', FLASH)	2.67	1932000-4
				4.00	1932000-3
3.18				1932000-2	
2.67	1932000-1				
HOUSING STYLE	EXTRACTOR COLOR	HOUSING COLOR	CONTACT GOLD INTERFACE	TAIL LENGTH	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN LEO ZHOU 28FEB2007	TE Connectivity		
DIMENSIONS: mm		CHK STEVEN YAO 28FEB2007			
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD STEVEN YAO 28FEB2007	NAME		
0 PLC ± - 1 PLC ± 0.5 2 PLC ± 0.13 3 PLC ± 0.013 4 PLC ± 0.0001 ANGLES ± -		PRODUCT SPEC	SOCKET ASSEMBLY, VERTICAL DDR3 DIMM, SOLDER TAIL, 240 POSITION		
MATERIAL		APPLICATION SPEC			
FINISH		WEIGHT	SIZE CAGE CODE DRAWING NO		
-		-	A1 00779 1932000		
CUSTOMER DRAWING		SCALE 4:1		SHEET 2 OF 4	REV H7

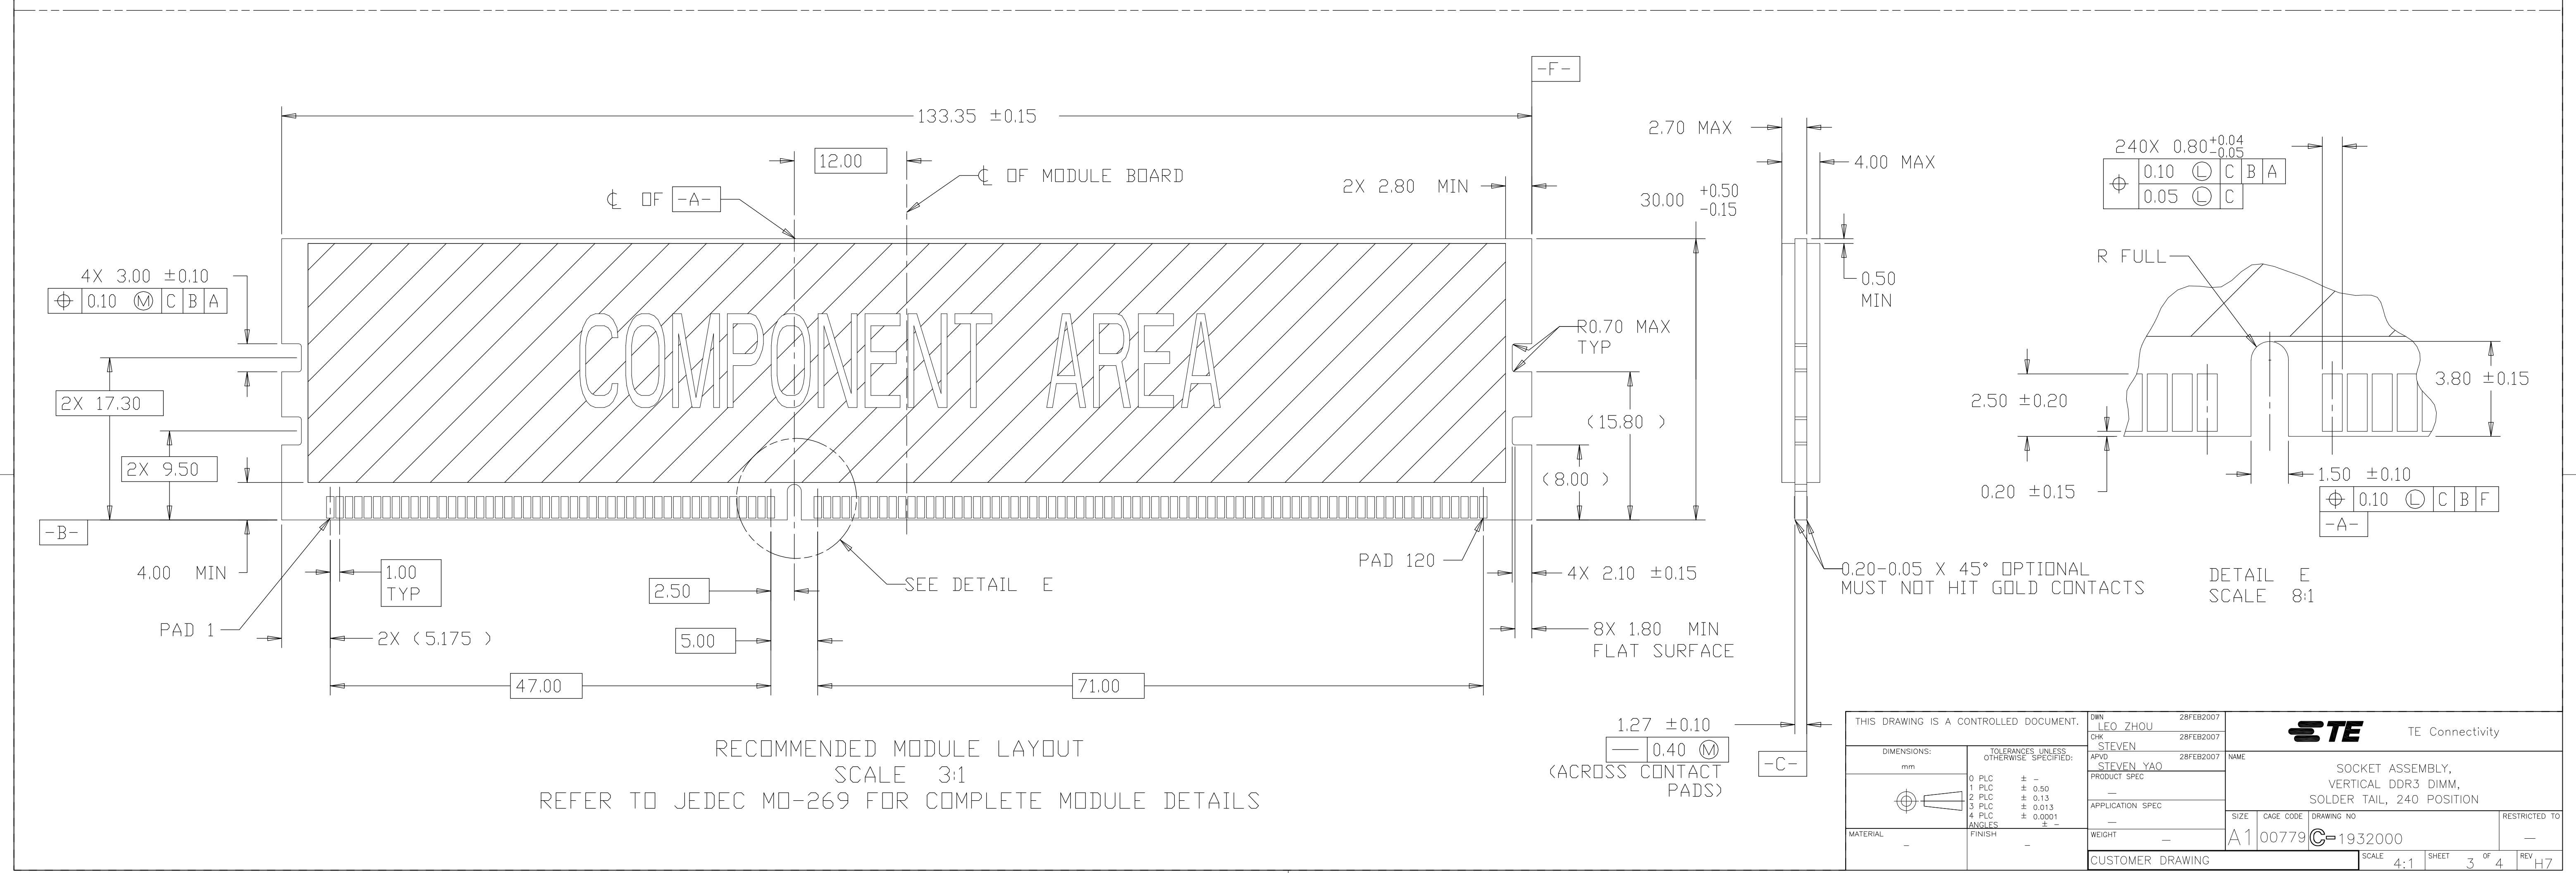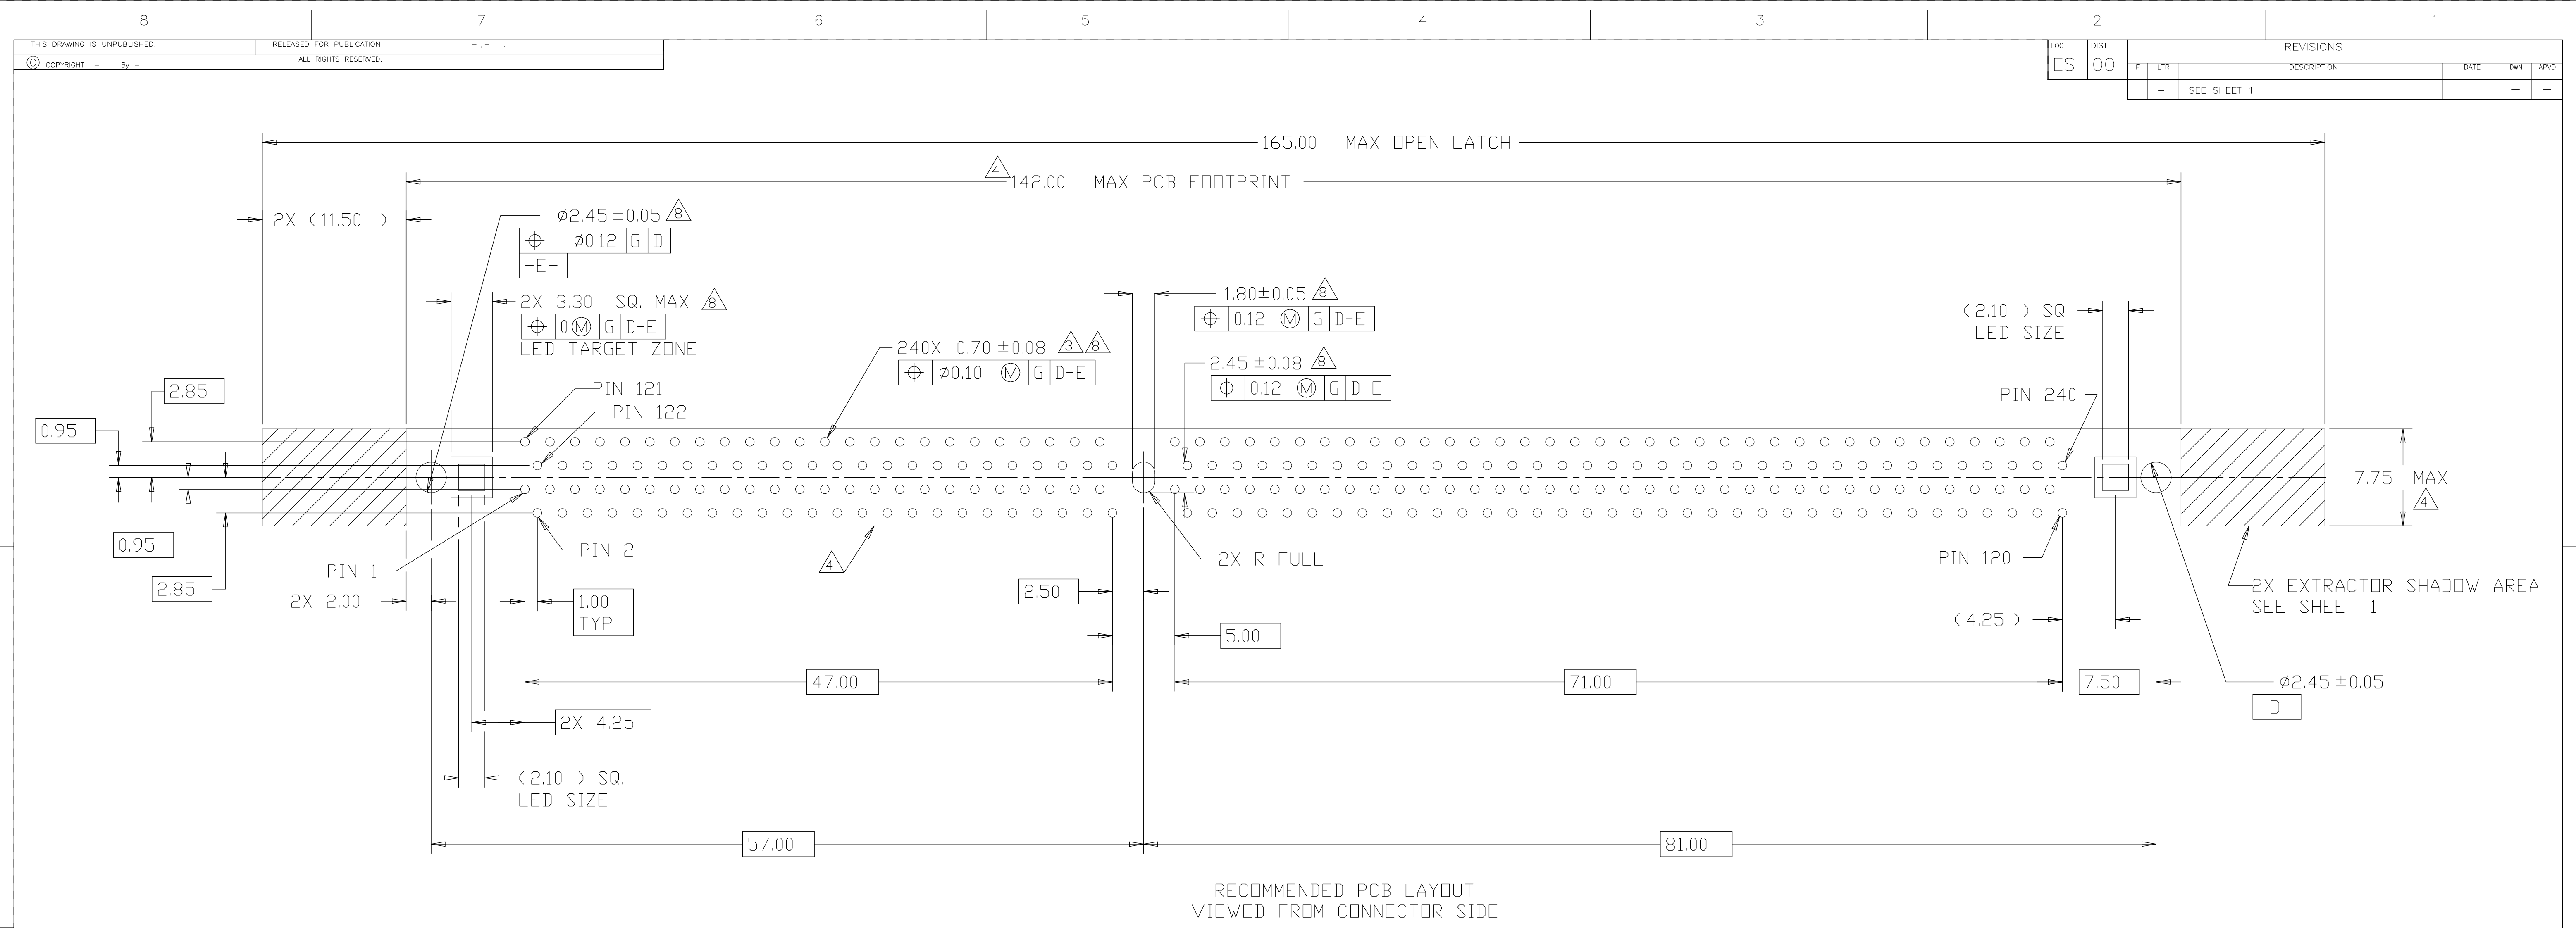

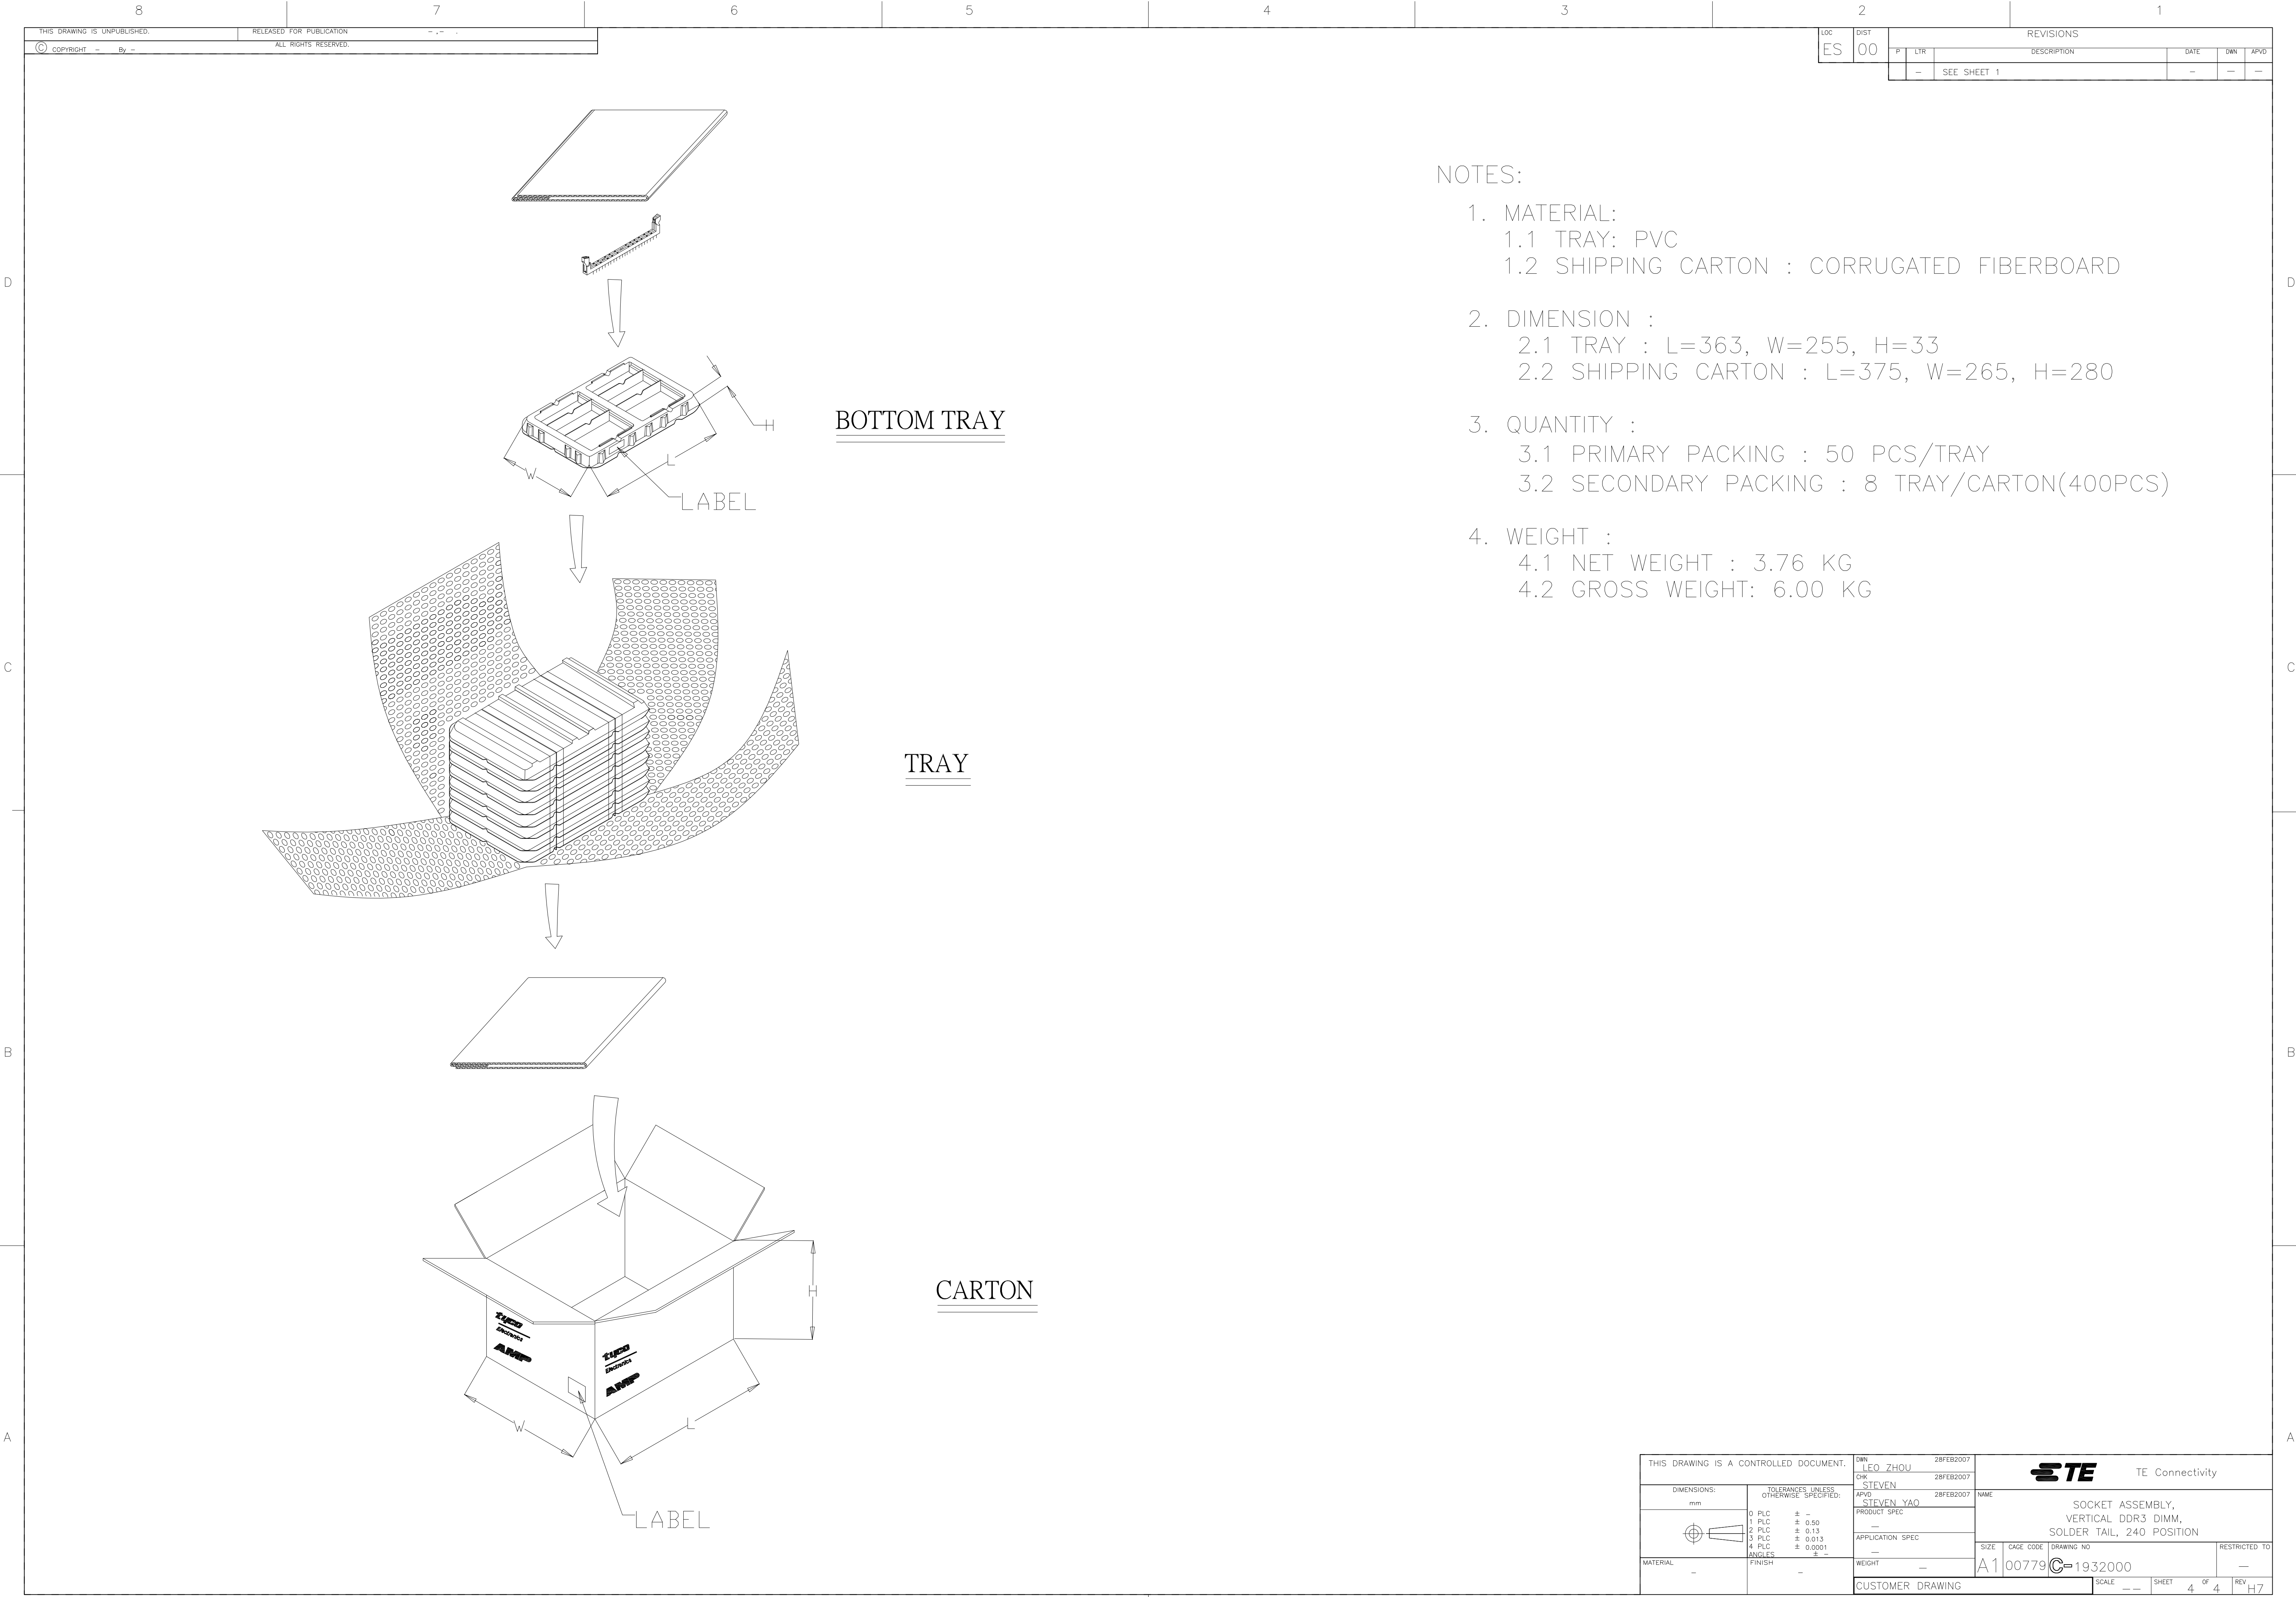

BOTTOM TRAY

TRAY

CARTON

- NOTES:
- 1. MATERIAL:
 - 1.1 TRAY: PVC
 - 1.2 SHIPPING CARTON : CORRUGATED FIBERBOARD
 - 2. DIMENSION :
 - 2.1 TRAY : L=363, W=255, H=33
 - 2.2 SHIPPING CARTON : L=375, W=265, H=280
 - 3. QUANTITY :
 - 3.1 PRIMARY PACKING : 50 PCS/TRAY
 - 3.2 SECONDARY PACKING : 8 TRAY/CARTON(400PCS)
 - 4. WEIGHT :
 - 4.1 NET WEIGHT : 3.76 KG
 - 4.2 GROSS WEIGHT: 6.00 KG

8	7	6	5	4	3	2	1
THIS DRAWING IS UNPUBLISHED.		RELEASED FOR PUBLICATION					
COPYRIGHT		By		ALL RIGHTS RESERVED.			
LOC		DIST		REVISIONS			
ES		00		P		LTR	
				DESCRIPTION		DATE	
				DWN		APVD	
				SEE SHEET 1			

DIMENSIONS:		TOLERANCES UNLESS OTHERWISE SPECIFIED:		DWN		28FEB2007		STE		TE Connectivity	
mm				CHK		28FEB2007		STEVEN		NAME	
				APVD		28FEB2007		STEVEN YAO		PRODUCT SPEC	
										APPLICATION SPEC	
										SIZE	
										CAGE CODE	
										DRAWING NO	
										RESTRICTED TO	
										A1	
										00779	
										1932000	
										CUSTOMER DRAWING	
										SCALE	
										SHEET	
										4	
										OF	
										4	
										REV	
										H7	