

- NOTES:
- 1.0 ELECTRICAL SPECIFICATIONS
 - 1.1 FREQUENCY RANGE: DC TO 18.0 GHz
 - 1.2 VSWR: 1.025 + .004f (GHz) MAX.
 - 1.3 POWER HANDLING: 2 WATTS AVG.
1.0 KILOWATT PEAK
 - 1.4 OPERATING TEMP. RANGE: -55°C to +125°C
 - 1.5 WEIGHT: 3 Oz. MAX.

2.0 MARK UNIT AS SHOWN:
(REF: INK-09183-27-[27 or 29])

2.1 MARK SERIAL NUMBER AND DATE
CODE ON UNIT.

SN XXXX
DC YYWW


4-DIGIT
SERIAL NO.

YEAR(YY) & WEEK(WW)
OF PRODUCTION

3.0 TESTING: TEST PER ATP-07840-60-02.

4.0 DUST CAP SUPPLIED WITH UNIT.

TYPE N JACK
PER MIL-PRF-39012

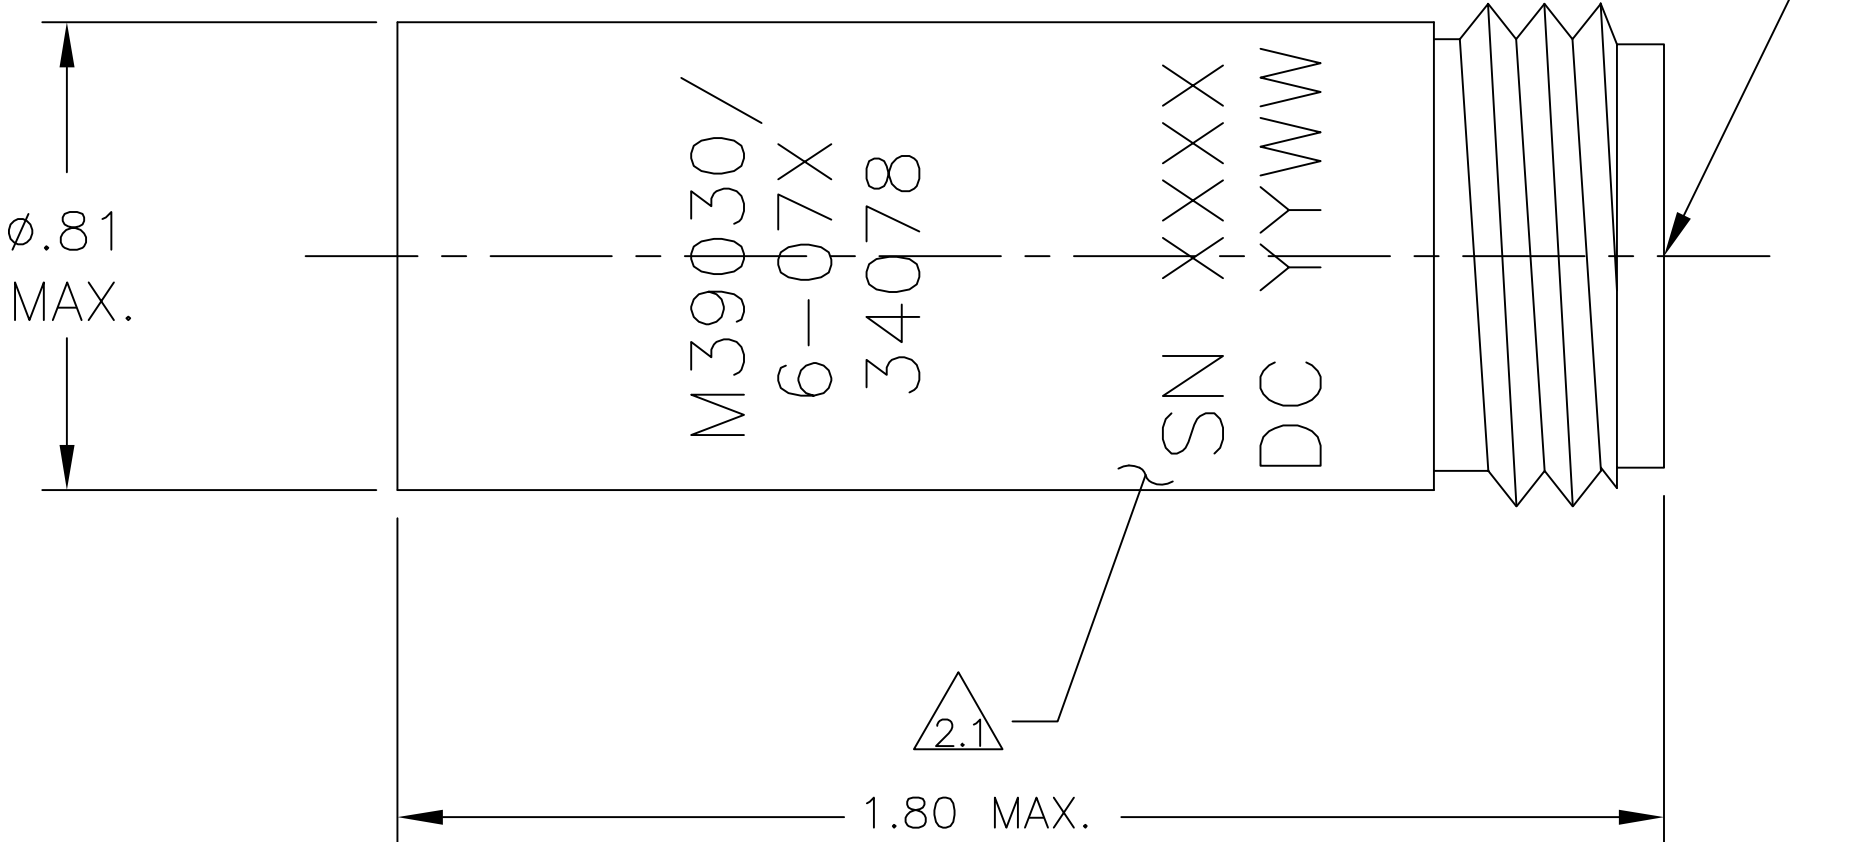

MODEL NUMBER
M39030/6-07(N OR S)

REV.	DESCRIPTION	DATE
-	RELEASED	12/10/93
A	ECN 13500	4/8/94
B	ECN 13664	6/3/94
C	ECN 19546	12/23/03
F	ECO 24773	5/16/13

NOTICE: The information contained in this drawing is proprietary and must not be used without the permission of Emerson Network Power.		CAGE CODE 34078		MIDWEST MICROWAVE	
		 EMERSON Network Power Connectivity Solutions		TITLE TERMINATION OUTLINE DRAWING	
UNLESS OTHERWISE NOTED DIMENSIONS ARE IN INCHES AND TOLERANCES ARE: 3 PLACE DECIMALS ±.005 2 PLACE DECIMALS ±.02 FRACTIONS ±1/64 PARALLELITY: T.I.R. _____ FLATNESS: T.I.R. _____ CONCENTRICITY: T.I.R. _____ ANGLES AND PERPENDICULARITY: ±1°		DRAWN/DATE C. WALLACE 8/15/13	ENG./DATE P. KLYVE 5/16/13	DRAWING NUMBER M39030/6-07(N OR S)-01	
		CHECKED/DATE P. KLYVE 8/16/13	APPROVED/DATE P. KLYVE 8/16/13	SCALE: 2=1	REV. F
		SHEET 1 of 1			