



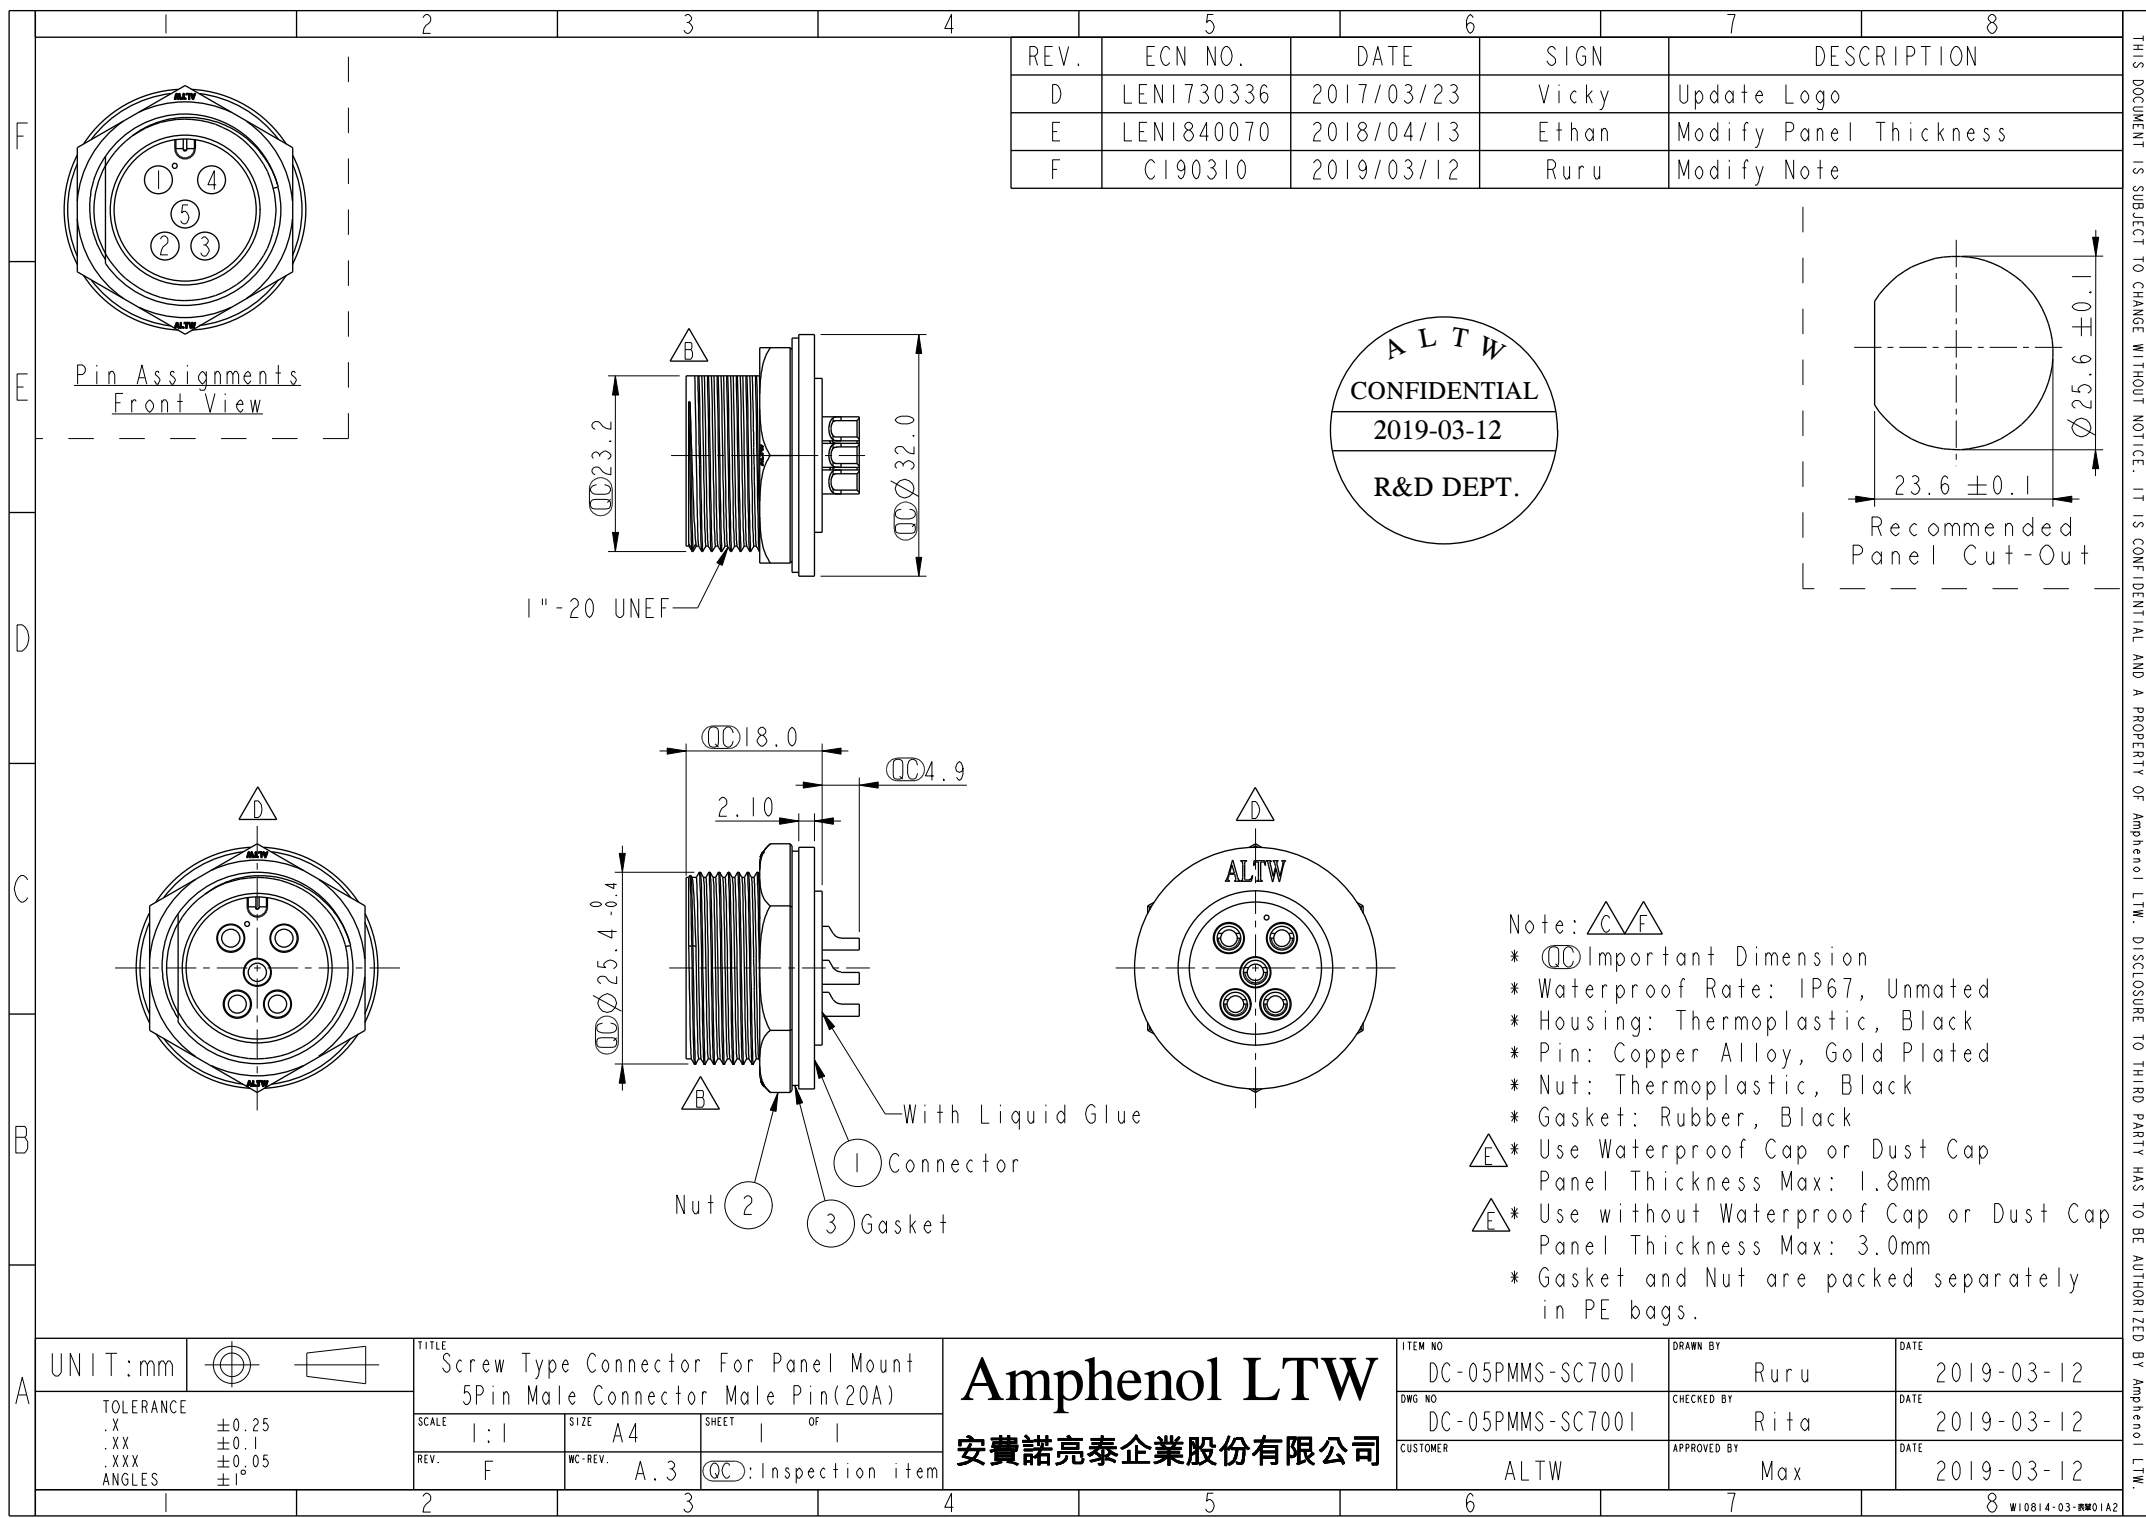

REV.	ECN NO.	DATE	SIGN	DESCRIPTION
D	LEN1730336	2017/03/23	Vicky	Update Logo
E	LEN1840070	2018/04/13	Ethan	Modify Panel Thickness
F	CI90310	2019/03/12	Ruru	Modify Note

ALTW
CONFIDENTIAL
2019-03-12
R&D DEPT.

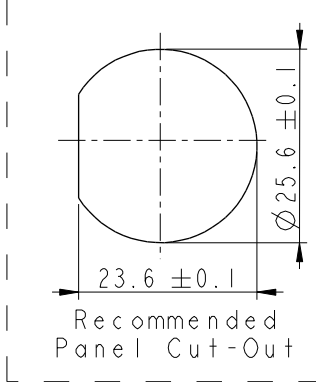

- Note: 
- *  Important Dimension
 - * Waterproof Rate: IP67, Unmated
 - * Housing: Thermoplastic, Black
 - * Pin: Copper Alloy, Gold Plated
 - * Nut: Thermoplastic, Black
 - * Gasket: Rubber, Black
 -  * Use Waterproof Cap or Dust Cap
Panel Thickness Max: 1.8mm
 -  * Use without Waterproof Cap or Dust Cap
Panel Thickness Max: 3.0mm
 - * Gasket and Nut are packed separately in PE bags.

UNIT:mm		TITLE Screw Type Connector For Panel Mount 5Pin Male Connector Male Pin(20A)	
TOLERANCE		SCALE	SIZE
.X	±0.25	1:1	A4
.XX	±0.1		
.XXX	±0.05		
ANGLES	±1°	REV.	F
		WC-REV.	A.3
		 Inspection item	

Amphenol LTW
安費諾亮泰企業股份有限公司

ITEM NO	DC-05PMMS-SC7001	DRAWN BY	Ruru	DATE	2019-03-12
DWG NO	DC-05PMMS-SC7001	CHECKED BY	Rita	DATE	2019-03-12
CUSTOMER	ALTW	APPROVED BY	Max	DATE	2019-03-12

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.