




PRE-CERTIFIED
CONNECTIVITY WITH
DESIGN FLEXIBILITY.

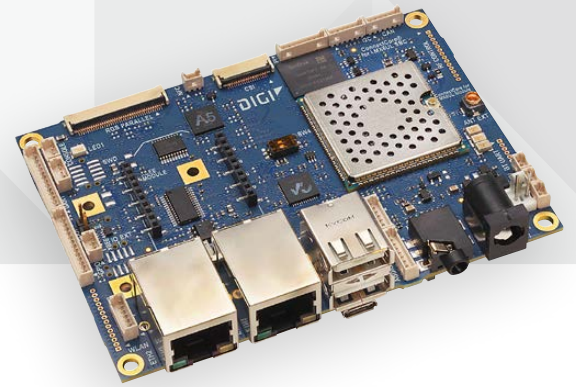

DIGI CONNECTCORE 6UL SBC PRO

Secure and pre-certified Single Board Computer for total design flexibility and connectivity in industrial applications

Digi ConnectCore® 6UL SBC Pro delivers the ultimate connected off-the-shelf NXP i.MX6UL single board computer in standard form factor for unparalleled design flexibility.


Its unique pre-certified wireless connectivity options offer 802.11a/b/g/n/ac Wi-Fi and Bluetooth 5, including Bluetooth Low Energy. Out-of-box cellular integration options using the pre-certified Digi XBee® Cellular module or third-party PCI Express Mini Card modem allows you to integrate cellular connectivity with less cost and complexity.

Digi Linux support includes TrustFence® device security framework with secure boot, encrypted file systems, protected ports and more.

FEATURES AND BENEFITS

- Powerful and flexible off-the-shelf solution in Pico-ITX form factor
- Production-ready with minimal hardware design effort
- Rugged design with industrial operating temperature range
- Pre-certified dual-band 802.11ac Wi-Fi connectivity
- Bluetooth 5, with Bluetooth Low Energy support
- Out-of-box support for cellular connectivity
- On-board NFC Forum Type 2 compliant tag
- Dual 10/100 Mbit Ethernet networking
- Integrated display and camera capabilities
- Rich interface and peripheral support
- Complete Yocto Project Linux BSP with source code
- Digi TrustFence® device security framework

BLOCK DIAGRAM

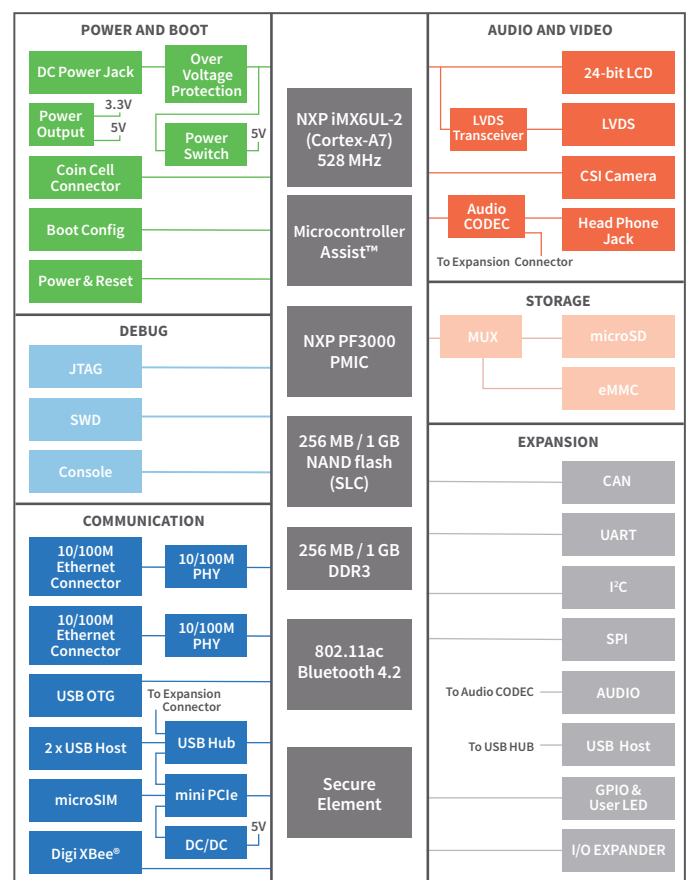


RELATED PRODUCTS




Digi ConnectCore®
6UL SBC Express



Digi ConnectCore®
6 SBC



Digi ConnectCore®
6UL
Development Kit



Digi XBee®
Modules



Digi Wireless Design
Services

SPECIFICATIONS		Digi ConnectCore® 6ULSBC PRO	
PERFORMANCE*			
APPLICATION PROCESSOR		NXP i.MX6UL-2, ARM® Cortex®-A7 @ 528 MHz, 128 KB L2 cache, with NEON™ MPE (Media Processor Engine) co-processor	
MEMORY		256 MB NAND flash, 256 MB DDR3 (CC-SBP-WMX-JN58); 1 GB NAND flash, 1 GB DDR (CC-SBP-WMX-JN7A)	
WIRED NETWORK CONNECTIVITY			
ETHERNET		2 x 10/100 Mbit Ethernet	
WIRELESS NETWORK CONNECTIVITY			
WI-FI		Dual-band 802.11a/b/g/n/ac 1x1 (MCS 0-9)	
BLUETOOTH		Bluetooth 5, with Bluetooth Low Energy support	
ANTENNAS		On-module U.FL or on-board MMCX antenna connector for Wi-Fi and Bluetooth, external NFC antenna option	
NFC		Energy-harvesting NXP NTAG, field detection trigger, ISO 14443A and NFC Forum Type 2 Tag compliant	
DIGI XBEE® RF		Standard Digi XBee socket	
PERIHPERALS/INTERFACES			
ETHERNET		2 x RJ-45 (10/100 Mbit)	
USB		2 x USB Host (Dual Type-A), 1 x USB Host (6-pin header), 1 x USB OTG (Micro-USB)	
DISPLAY		24-bit Parallel RGB (40-pin header), and 18-bit LVDS (20-pin header)	
CAMERA		8-bit Parallel CSI (20-pin header)	
GPIO		14-pin header (8 x GPIO, 1 x Touch)	
UART / CONSOLE		14-pin header (1 x two-wire, 2 x four-wire, one shared with XBee socket), 3-pin header (Console)	
OTHER CONNECTIVITY		1 x I2C (6-pin header), 1 x SPI (8-pin header), 2 x CAN (6-pin header)	
PCI EXPRESS MINI CARD		Half-size and full-size card support, with on-board Micro SIM slot support	
RF CONTROL		14-pin header (Wi-Fi Enable/Disable, Bluetooth Enable/Disable, Wakeup, PCM, LTE Control, GPS Co-Existence)	
EXTERNAL STORAGE		microSD, on-board 4 GB eMMC flash for data storage	
AUDIO		3.5 mm headphone jack, 6-pin header (speaker), 8-pin header (line-in, microphone, line-out)	
BUTTONS / SWITCHES		Power, reset, user, boot select (NAND/microSD), RF (Wi-Fi enable, Bluetooth enable), antenna select (U.FL on-module/MMCX on-board)	
DEBUG		Tag-connect for JTAG and SWD	
POWER		3.3 V out (2-pin header), 5 V out (2-pin header), battery (2-pin header)	
LEDS		Power, 3 x user	
CERTIFICATIONS**			
RADIO APPROVALS		US, Canada, EU, Japan, Australia, New Zealand	
EMISSIONS / IMMUNITY / SAFETY		FCC Part 15 Class B, EN 55022 Class B, EN 61000-3-2, EN 61000-3-3, ICES-003 Class B, VCCI Class II, AS 3548, FCC Part 15 Subpart C Section 15.247, IC (Industry Canada), RSS-210 Issue 5 Section 6.2.2(o), EN 300 328, EN 301 489-17, EN 55024, EN 301 489-3, Safety (UL/UL equivalent)	
POWER REQUIREMENTS			
SUPPLY VOLTAGE		5 VDC @ 300 mA (typical); See ConnectCore 6UL module product brief for module-only power consumption guidance.	
POWER CONNECTORS		Locking barrel connector (2 mm), or dedicated power connector (3-pin header)	
ENVIRONMENTAL			
OPERATING TEMPERATURE		-40° C to 85° C (-40° F to 185° F)	
STORAGE TEMPERATURE		-50° C to 125° C (-58° F to 257° F)	
RELATIVE HUMIDITY		Relative humidity 5% to 90% (non-condensing)	
DESIGN VERIFICATION		Temperature: IEC 60068-2-1, IEC 60068-2-2, IEC 60068-2-78; Vibration/Shock: IEC 60068-2-6, IEC 60068-2-64, IEC 60068-2-27, HALT	
MECHANICAL			
DIMENSIONS		100 mm x 72 mm (3.9 in x 2.8 in)	
WARRANTY			
PRODUCT WARRANTY		1-year	

* Populates ConnectCore 6UL module P/N CC-WMX-JN58-NE (LGA mounting). **Final certifications pending .

DIGI CONNECTCORE® SBC SELECTION GUIDE


		Digi ConnectCore 6UL SBC Express	Digi ConnectCore 6UL SBC Pro	Digi ConnectCore 6 SBC for i.MX6Quad	Digi ConnectCore 6 SBC for i.MX6Dual	Digi ConnectCore 6 SBC for i.MX6DualLite
PERFORMANCE	Processor	NXP i.MX6UL-2 (Cortex-A7)	NXP i.MX6UL-2 (Cortex-A7)	NXP i.MX6Quad (Cortex-A9)	NXP i.MX6Dual (Cortex-A9)	NXP i.MX6DualLite (Cortex-A9)
	Clock speed	528 MHz	528 MHz	1.2 GHz	800 MHz	800 MHz
	Microcontroller Assist™	✓	✓	✓	-	-
MEMORY	Flash	256 MB NAND (SLC)	256 MB / 1 GB NAND SLC 4 GB eMMC ^{1,7}	4 GB eMMC ¹	4 GB eMMC ¹	4 GB eMMC ¹
	RAM	256 MB DDR3	256 MB / 1 GB DDR3	1 GB DDR3	1GB DDR3	512 MB DDR3
NETWORKING	Ethernet	1 x 10/100 Mbit	2 x 10/100 Mbit	1 x Gigabit	1 x Gigabit	1 x Gigabit
	Wi-Fi	802.11a/b/g/n/ac 1x1	802.11a/b/g/n/ac 1x1	802.11a/b/g/n 1x1	802.11a/b/g/n 1x1	802.11a/b/g/n 1x1
	Bluetooth	5	5	4.0	4.0	4.0
	Wi-Fi / Bluetooth antenna	On-board/U.FL	U.FL/MMCX ⁶	U.FL	U.FL	U.FL
	NFC Forum Type 2 Tag	-	✓	-	-	-
	NFC antenna	-	External	-	-	-
	XBee® socket	-	✓	✓	✓	✓
SECURITY	Digi TrustFence®	✓	✓	✓	✓	✓
CELLULAR ²	Micro SIM card slot	-	✓	✓	✓	-
COMMUNICATION	USB 2.0 host	1	3	3	3	2
	USB 2.0 OTG	1	1	1	1	1
	PCI Express Mini Card 2.1	-	✓ (USB 2.0 host)	✓ (USB host 2.0/x1 PCIe)	✓ (USB host 2.0/x1 PCIe)	-
	RS232/TTL	-/2 ⁴	2/1	2/1	2/1	2/1
	Console	✓ ⁵	✓	✓	✓	✓
	I²C	✓ ⁴	✓	✓	✓	-
	SPI	✓ ⁴	✓	✓	✓	-
	GPIO	✓ ⁴	✓	✓	✓	✓
	Dual CAN	-	✓	✓	✓	-
	Grove	3	-	-	-	-
GRAPHICS	Expansion connector ⁴	✓ ⁴	-	-	-	-
	2D/3D hardware acceleration (GPU)	-	-	✓	✓	✓
	Hardware video encoding/decoding	-	-	✓	✓	✓
DISPLAY	Resolution	Up to 1366 x 768		Up to 1920 x 1080		
	HDMI	-	-	✓	✓	✓
	LVDS ³	-	1	2	1	-
	MIPI DSI ³	-	-	✓	✓	-
	RGB parallel	8-bit ⁴	18-/24-bit	24-bit	24-bit	24-bit
CAMERA	MIPI CSI	-	-	✓	✓	-
	8-Bit parallel	-	✓	2	1	-
AUDIO	Headphone jack	-	✓	✓	✓	-
	Line-in / line-out / microphone header	-	✓	✓	✓	-
STORAGE	microSD	✓	✓	✓	✓	✓
	SATA 3.0	-	-	✓	-	-
OTHER	Power / reset buttons	✓	✓	✓	✓	✓
	Power / reset header	✓	✓	✓	✓	✓
	Coin cell battery header	✓	✓	✓	✓	✓
	Power / user LEDs	✓	✓	✓	✓	✓
	Boot configuration switch	Population options	Population options	✓	✓	✓
	JTAG (via Tag-Connect)	✓	✓	✓	✓	✓
	SWD (via Tag-Connect)	✓	✓	✓	✓	✓
ENVIRONMENTAL	Operating temperature	-40° C to 85° C (-40° F to 185° F)	-40° C to 85° C (-40° F to 185° F)	-20° C to 70° C (-4° F to 158° F)	-40° C to 85° C (-40° F to 185° F)	-40° C to 85° C (-40° F to 185° F)
MECHANICAL	Dimensions	87 mm x 63 mm (3.4 in x 2.5 in)	100 x 72 mm (3.9 in x 2.8 in)			
	Form factor	SBC	Pico-ITX			
DIGI SKUS		CC-SBE-WMX-JN58	CC-SBP-WMX-JN58 CC-SBP-WMX-JN&A	CC-SB-WMX-J97C-1	CC-SB-WMX-L87C-1	CC-SB-WMX-L76C-1

1. pSLC mode option for industrial reliability
2. Via PCI Express Mini Card connector, or Digi XBee® cellular
3. With Touch (I2C) + backlight control
4. Raspberry Pi HAT compatible header (and mounting holes)

5. USB device via USB Type AB connector
6. On-board antenna switch configuration
7. Software-selectable: on-board eMMC or microSD

PART NUMBERS	DESCRIPTION
CC-SBP-WMX-JN58	Digi ConnectCore 6UL SBC Pro, Pico-ITX form factor, i.MX6UL-2, 528 MHz, Secure element, Microcontroller Assist™, 256 MB NAND flash (SLC), 256 MB DDR3, Dual 10/100 Mbit Ethernet, 802.11a/b/g/n/ac, Bluetooth 5, industrial operating temperature
CC-SBP-WMX-JN7A	Digi ConnectCore 6UL SBC Pro, Pico-ITX form factor, i.MX6UL-2, 528 MHz, Secure element, Microcontroller Assist™, 1 GB NAND flash (SLC), 1 GB DDR3, Dual 10/100 Mbit Ethernet, 802.11a/b/g/n/ac, Bluetooth 5, industrial operating temperature
CC-WMX6UL-KIT	Digi ConnectCore 6UL SBC Pro, Pico-ITX (100 x 72 mm), industrial temp, 256 MB SLC NAND, 256 MB DDR3, Dual 10/100 Ethernet, 802.11a/b/g/n/ac, Bluetooth 5, XBee socket, cellular connectivity support via PCI Express Mini Card, SIM, NFC, microSD, USB Host, USB OTG, UART, DualCAN, SPI, I2C, LVDS, camera, antenna connector, battery connector, power supply and accessories
CC-ACC-LCD-70WV	7" LCD accessory kit, with projected capacitive touch, WVGA (800 x 480)

MECHANICAL DRAWINGS

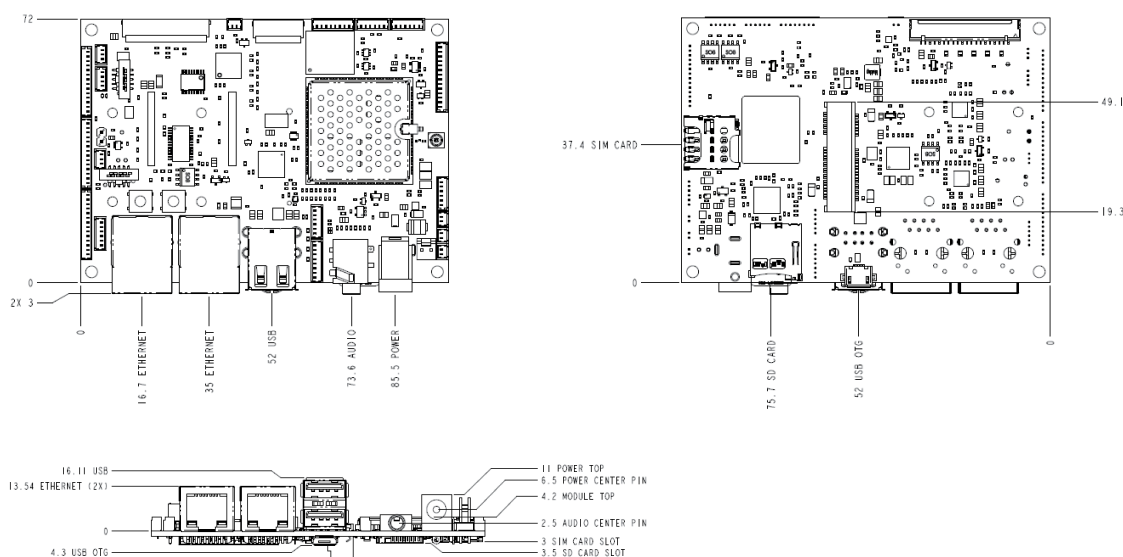

FOR MORE INFORMATION
PLEASE VISIT **DIGI.COM**



DIGI SERVICE AND SUPPORT / You can purchase with confidence knowing that Digi is always available to serve you with expert technical support and our industry leading warranty. For detailed information visit www.digi.com/support.

© 1996-2020 Digi International Inc. All rights reserved.
All trademarks are the property of their respective owners.

91003580
B3/220

DIGI INTERNATIONAL WORLDWIDE HQ
877-912-3444 / 952-912-3444 / www.digi.com

DIGI INTERNATIONAL GERMANY
+49-89-540-428-0

DIGI INTERNATIONAL JAPAN
+81-3-5428-0261 / www.digi-intl.co.jp

DIGI INTERNATIONAL SINGAPORE
+65-6213-5380

DIGI INTERNATIONAL CHINA
+86-21-50492199 / www.digi.com.cn

