

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number:

76165-7806

Status:


Active

Overview:

Impact™ Backplane Connector and Cable Assembly System

Description:

Impact™ 100 Ohm 3 Pair Vertical Backplane Header, Left Guide, Right Endwall, 8 Columns, 72 Circuits, Pin Length 4.50mm, Plated Through Hole Dimension 0.39mm, Lead-Free

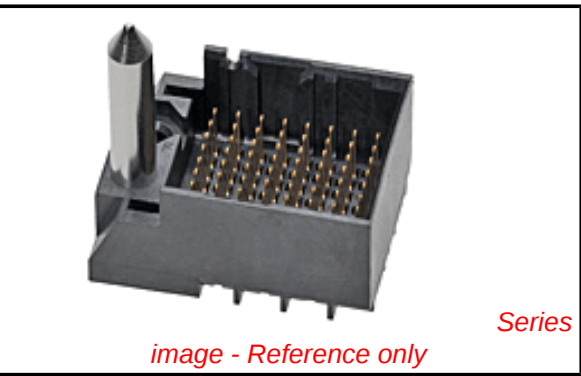

Documents:

3D Model

Application Specification AS-76060-990 (PDF)

Drawing (PDF)

RoHS Certificate of Compliance (PDF)

Product Specification PS-76060-999 (PDF)

|                                |                                                       |
|--------------------------------|-------------------------------------------------------|
| Agency Certification           |                                                       |
| UL                             | E29179                                                |
| General                        |                                                       |
| Product Family                 | Backplane Connectors                                  |
| Series                         | 76165                                                 |
| Application                    | Conventional                                          |
| Application Tooling Documents  | TM-622018799                                          |
| Component Type                 | PCB Header                                            |
| Overview                       | Impact™ Backplane Connector and Cable Assembly System |
| Product Name                   | Impact™                                               |
| UPC                            | 883906401870                                          |
| Physical                       |                                                       |
| Circuits (Loaded)              | 72                                                    |
| Circuits (maximum)             | 72                                                    |
| Color - Resin                  | Black                                                 |
| Durability (mating cycles max) | 200                                                   |
| First Mate / Last Break        | No                                                    |
| Flammability                   | 94V-0                                                 |
| Guide to Mating Part           | Yes                                                   |
| Keying to Mating Part          | None                                                  |
| Material - Metal               | High Performance Alloy (HPA)                          |
| Material - Plating Mating      | Gold                                                  |
| Material - Plating Termination | Tin                                                   |
| Material - Resin               | High Temperature Thermoplastic                        |
| Net Weight                     | 4.943/g                                               |
| Number of Columns              | 8                                                     |
| Number of Pairs                | 3                                                     |
| Number of Rows                 | 9                                                     |
| Orientation                    | Vertical                                              |
| PC Tail Length                 | 1.40mm                                                |
| PCB Locator                    | No                                                    |
| PCB Retention                  | None                                                  |
| PCB Thickness - Recommended    | 1.00mm                                                |
| Packaging Type                 | Tray                                                  |
| Pitch - Mating Interface       | 1.90mm                                                |
| Pitch - Termination Interface  | 1.90mm                                                |
| Plating min - Mating           | 0.762µm                                               |
| Polarized to PCB               | Yes                                                   |
| Temperature Range - Operating  | -55°C to +85°C                                        |
| Termination Interface: Style   | Through Hole - Compliant Pin                          |

EU RoHS

ELV and RoHS

Compliant

REACH SVHC

Not Reviewed

Low-Halogen Status

Not Reviewed

China RoHS



Need more information on product environmental compliance?

Email [productcompliance@molex.com](mailto:productcompliance@molex.com)  
For a multiple part number RoHS Certificate of Compliance, [click here](#)

Please visit the [Contact Us](#) section for any non-product compliance questions.

Search Parts in this Series

76165Series

Mates With

76170 Impact™ 100 Ohm Daughtercard

Application Tooling | FAQ

Tooling specifications and manuals are found by selecting the products below. Crimp Height Specifications are then contained in the Application Tooling Specification document.

Global

| Description                                                           | Product #                  |
|-----------------------------------------------------------------------|----------------------------|
| Backplane Insertion Tool for Signal Contact                           | <a href="#">0621005800</a> |
| Impact™ Backplane Press-In Tool, 3-Pair by 8-Column Assemblies        | <a href="#">0622018674</a> |
| Backplane Header Removal Tool for GbX-U™, I-Trac™, Impact™, or TinMan | <a href="#">0621009610</a> |

**Electrical**

|                               |                 |
|-------------------------------|-----------------|
| Current - Maximum per Contact | 0.75A           |
| Data Rate                     | 25.0 Gbps       |
| Impedance                     | 100#            |
| Shield Type                   | N/A             |
| Shielded                      | No              |
| Voltage - Maximum             | 30V AC (RMS)/DC |

**Material Info**

**Reference - Drawing Numbers**

|                           |                |
|---------------------------|----------------|
| Application Specification | AS-76060-990   |
| Electrical Model Document | EE-76170-0001  |
| Product Specification     | PS-76060-999   |
| Sales Drawing             | SD-76165-002   |
| Symbol/Footprint Data     | SYM-76165-7806 |

This document was generated on 06/04/2015

**PLEASE CHECK [WWW.MOLEX.COM](http://WWW.MOLEX.COM) FOR LATEST PART INFORMATION**