



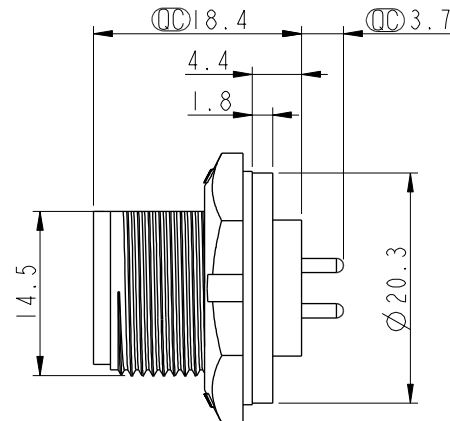


THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.


REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	LEN-8B0469	2008/09/10	Shin	Add Note
C	LEN1730277	2017/03/20	Ruru	Change Logo
D	CI90274	2019/02/19	Ruru	Modify Note

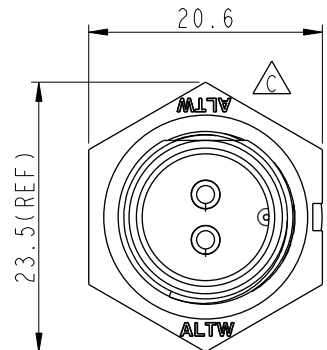


PCB Layout



Pin Assignments
Front View



Recommended Panel Cut-Out

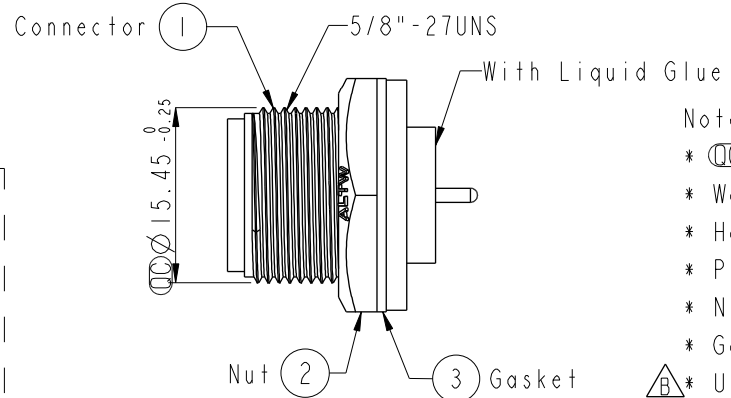

Note:

- * Important Dimension To Check.
- * Waterproof Rate: IP67, Unmated
- * Housing: Thermoplastic, Black
- * Pin: Copper Alloy, Gold Plated
- * Nut: Thermoplastic, Black
- * Gasket: Rubber, Black

- * Use with waterproof cap or dust cap
Panel Thickness Max: 3.0mm
- * Use without waterproof cap or dust cap
Panel Thickness Max: 4.0mm
- * Gasket and Nut are packed separately in PE bags.

UNIT:mm		TOLERANCE		TITLE		ITEM NO		DRAWN BY		DATE	
.X ±0.25		.XX ±0.1		Standard		BB-02PMMP-SC7001		Ruru		2019-02-19	
.XXX ±0.05		ANGLES ±1°		Panel Screw 2Pin M Conn. M Pin		DWG NO		CHECKED BY		DATE	
REV. D		WC-REV. A.4		SCALE 1:1		BB-02PMMP-SC7001		Rita		2019-02-19	
SHEET 1 OF 1		QC: Inspection item		CUSTOMER		ALTW		APPROVED BY		Max	
										2019-02-19	

Amphenol LTW
安費諾亮泰企業股份有限公司