


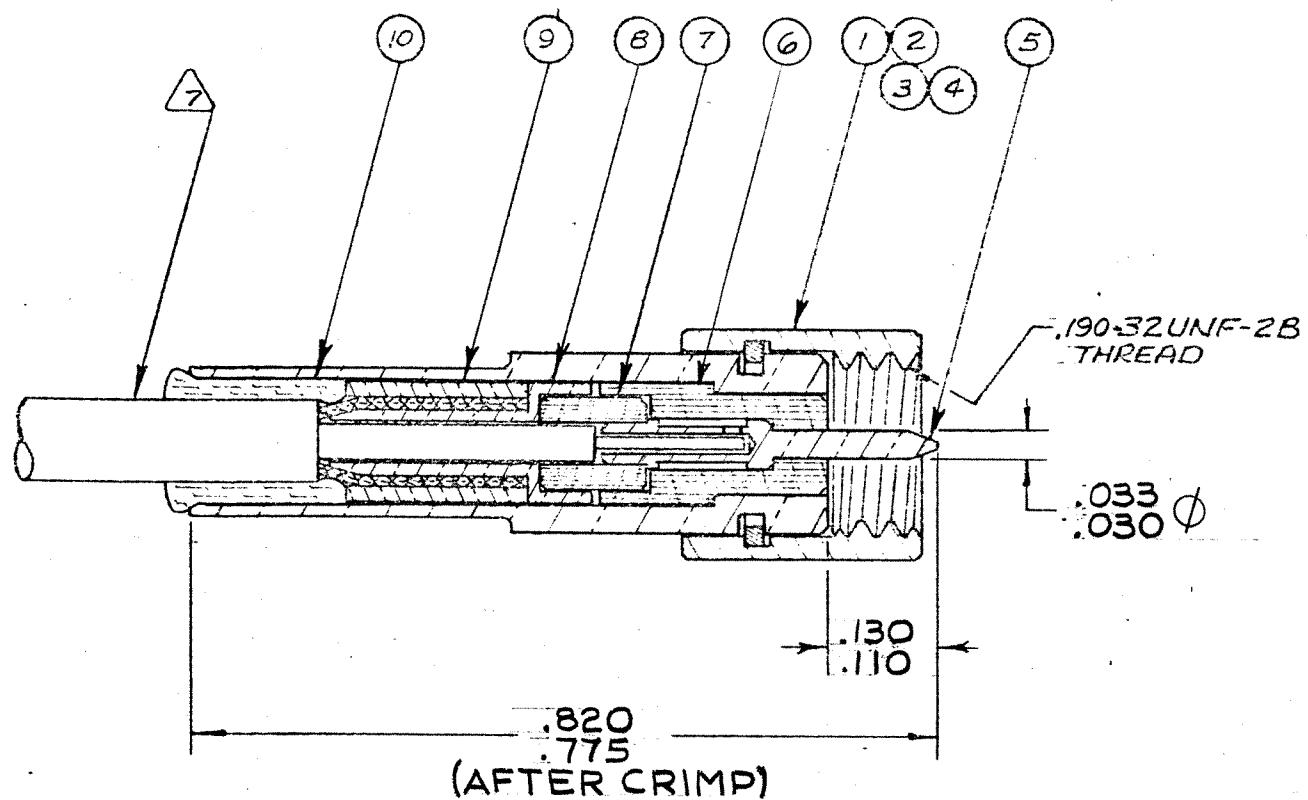

7. CABLE ACCOMMODATION DIMS:
JACKET DIA.----- .088 MAX.
DIELECTRIC DIA.----- .032-.042
INNER CONDUCTOR DIA.--- .009-.019
FOR USE WITH EXTRUDED OR WRAPPED JACKET.

6. FOR ELECTRICAL & MECHANICAL
SPECS. SEE MALCO CATALOG.

5. .016 DIA. WIRE HOLE 3 PLACES

4. DELETED

3. GOLD PLATE PER MIL-G-45204 TYPE II, GR.C, CL. I
2. SEE RF-ASMB-8 ASSY INSTRUCTIONS. SPECIAL TOOL REQ'D:
CONTACT CRIMP: 010-0134-0000 & LOCATOR 001-0104-0000.
ALTERNATE TOOL 010-0065-0000 (NO LOCATOR REQUIRED)
HOUSING CRIMP: 010-0081-0000.

1. THIS CONNECTOR MATES WITH ALL 50Ω
GOLDEN CRIMP, CRIMP SILVER & ALL S-50 JACKS &
RECEPTACLES AS LISTED IN MICRODOT CATALOG.

NOTES: UNLESS OTHERWISE SPECIFIED

TYCO CUSTOMER
DWG 7-1532149-6

					DELETED		11	
	1	1	1	1	003-0815-0001	SEALING SLEEVE	SILICONE RUBBER MIL-R-5847	10
3	1	1	1	1	003-0813-0002	MIDDLE SLEEVE	LEADED COPPER	9
3	1	1	1	1	003-0814-0002	INNER SLEEVE	BRASS, QQ-B-626	8
	1	1	1	1	003-0811-0001	CABLE INSULATOR	TEFLON PER L-P-403	7
	1	1	1	1	003-1301-0001	BODY INSULATOR	TEFLON PER L-P-403	6
3	1	1	1	1	003-0807-0002	PIN CONTACT	COPPER ALLOY	5
3	1				003-1299-0004	HOUSING SUB-ASSY NUT-1/4" HEX W/WIRE HOLES		4
3		1			003-1299-0003	HOUSING SUB-ASSY NUT-1/4" HEX		3
3			1		003-1299-0002	HOUSING SUB-ASSY NUT-1/4" KNURL		2
3				1	003-1299-0001	HOUSING SUB-ASSY NUT-1/4" PARTIAL HEX		1
	4	3	2	1	COMPONENT	NOMENCLATURE	MAT'L & SPEC.	ITEM

ASSEMBLY		NO	REV. LETTER		DATE	APP	STANDARD TOLERANCES UNLESS OTHERWISE SPECIFIED		MALCO A MICRODOT COMPANY, INC. 220 PASADENA AVE., SO. PASADENA, CALIF.	
NEXT ASSY		LET	SCD	3/24/65	12/22	PS	FRAC. 1/16 ANGLES 45° ECCENTRICITY MAX. FIL. HOLE DIA. ± SURFACE ROUGHNESS V. MICRO INCHES THREADS TO MIL-STD-123 COMMERCIAL TOLERANCES APPLY TO STOCK DIMENSIONS		SURFACE TREATMENT NOTED	
PLUG ASSEMBLY NON-ENVIRONMENTAL GOLDEN CRIMP 50Ω							PROD. CODE 941 CODE CDM132-0112-000*		APP. R.B.C. APP. J.L. 7/7/65 CHECKED BY DRAWN BY U.M. SCALE 1/1 DATE 6/22/65 DRAWING NUMBER J	