


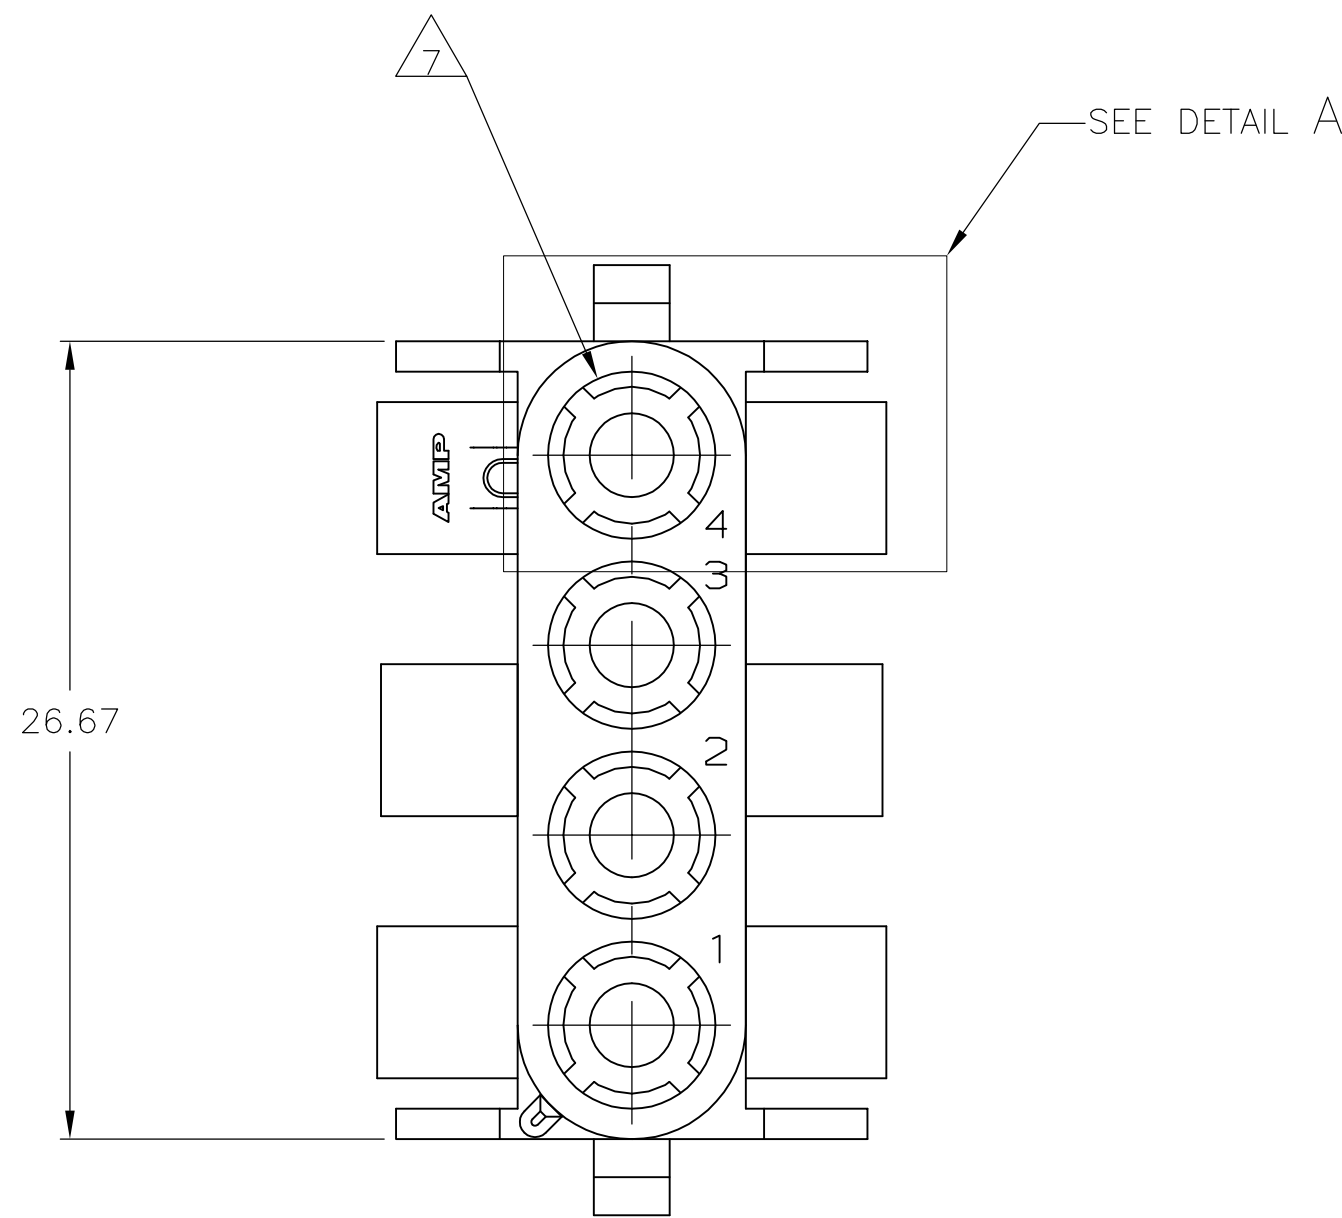
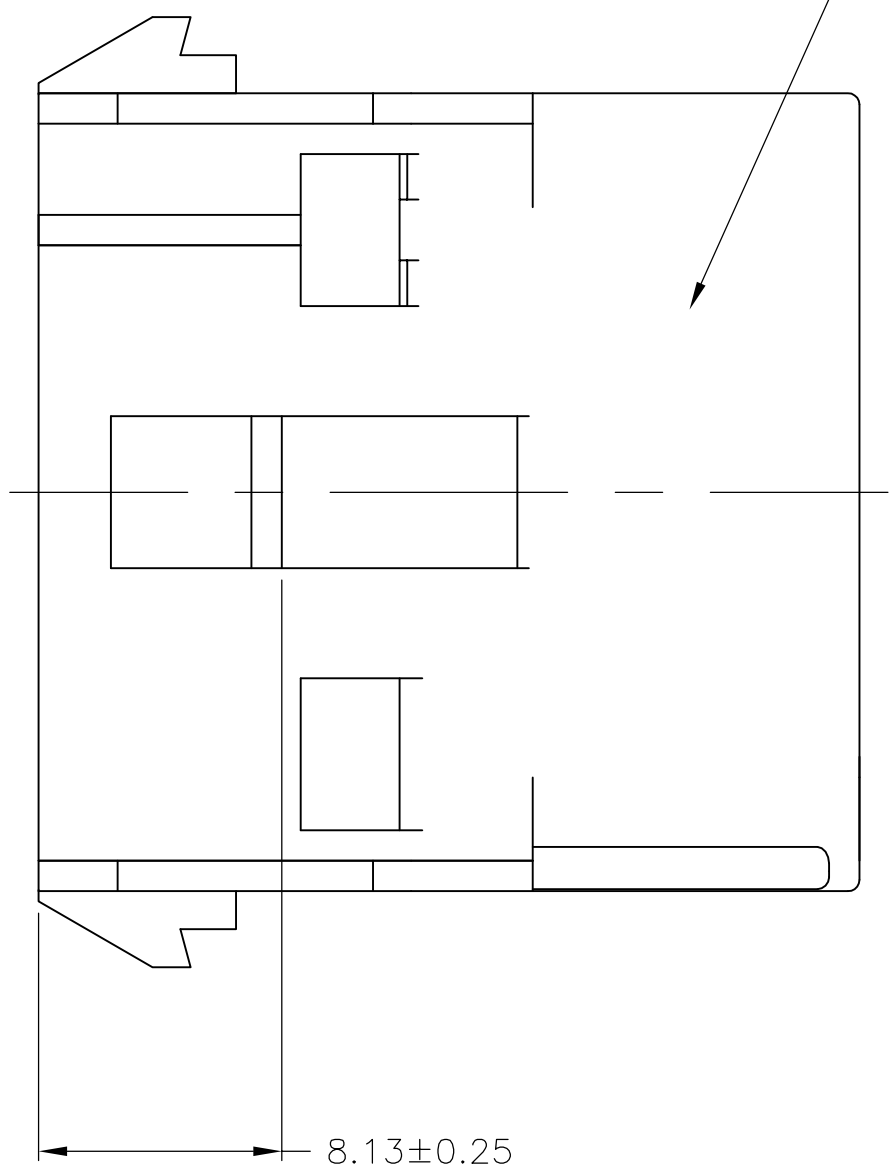
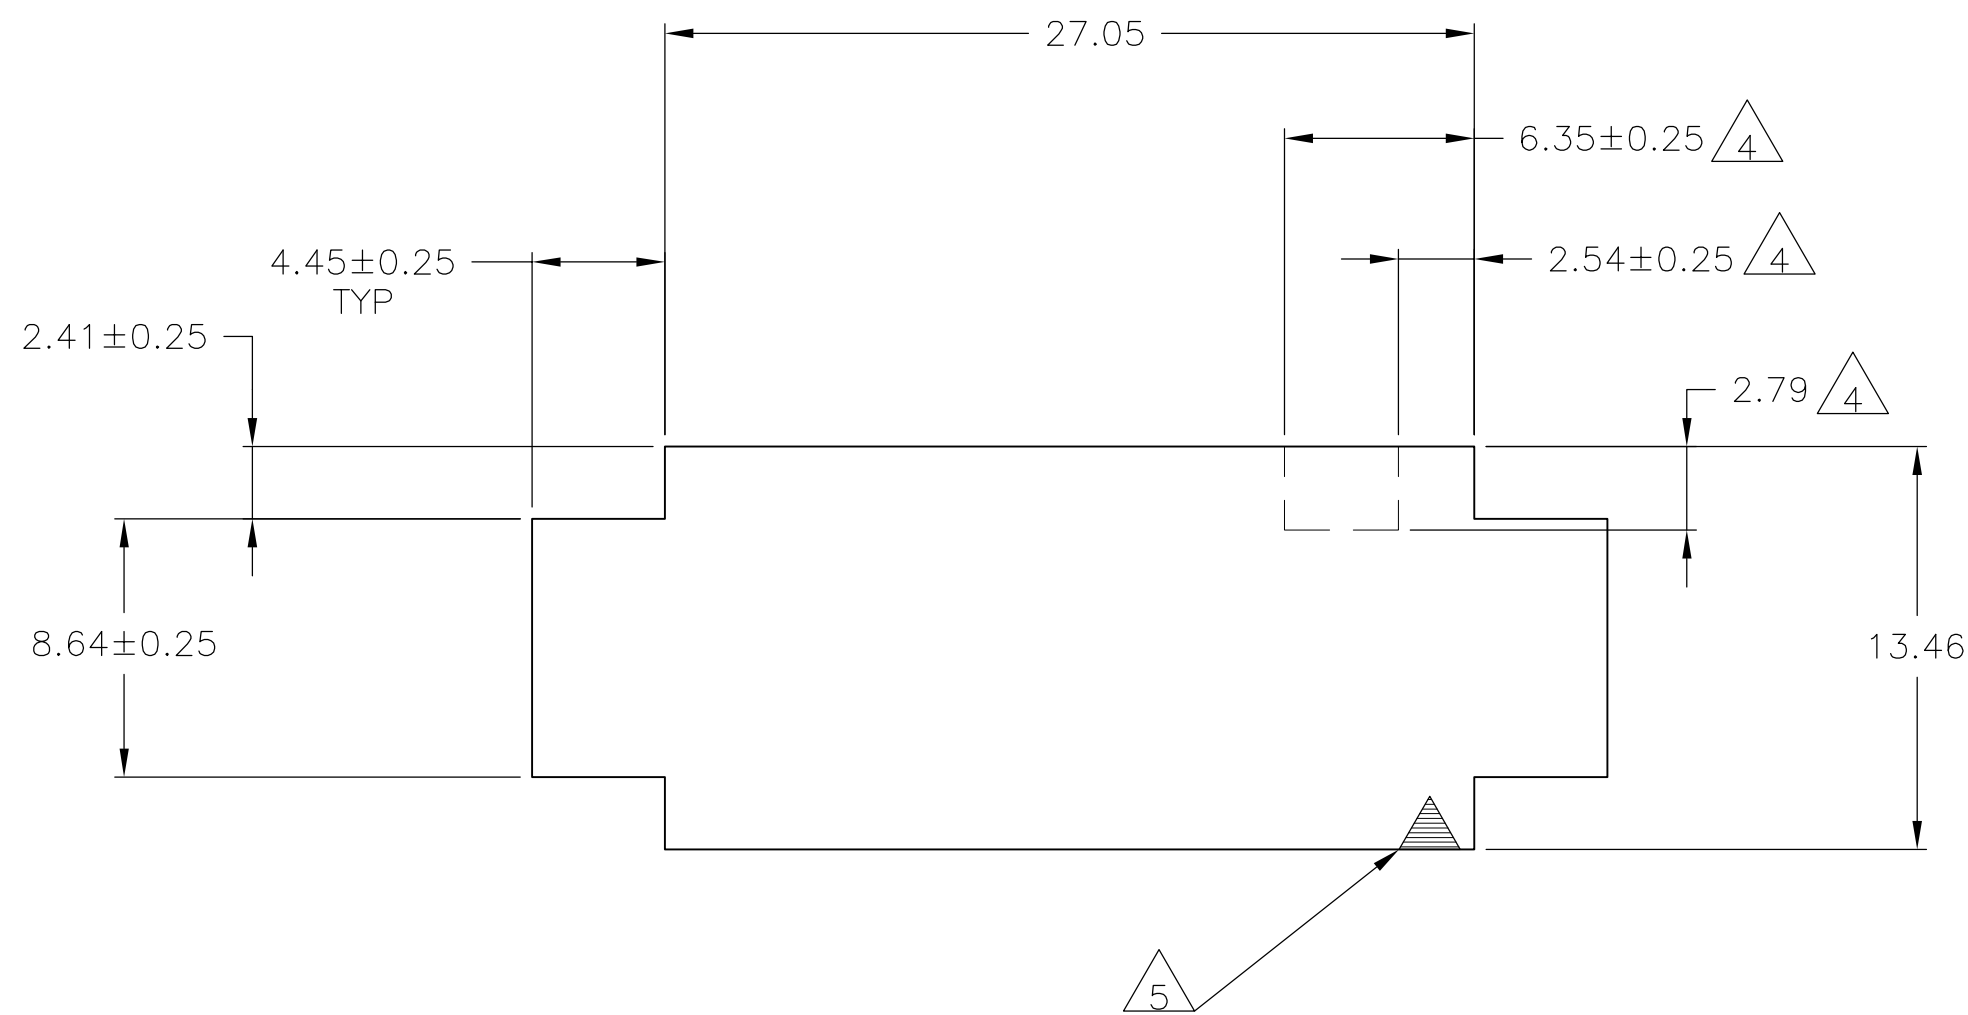


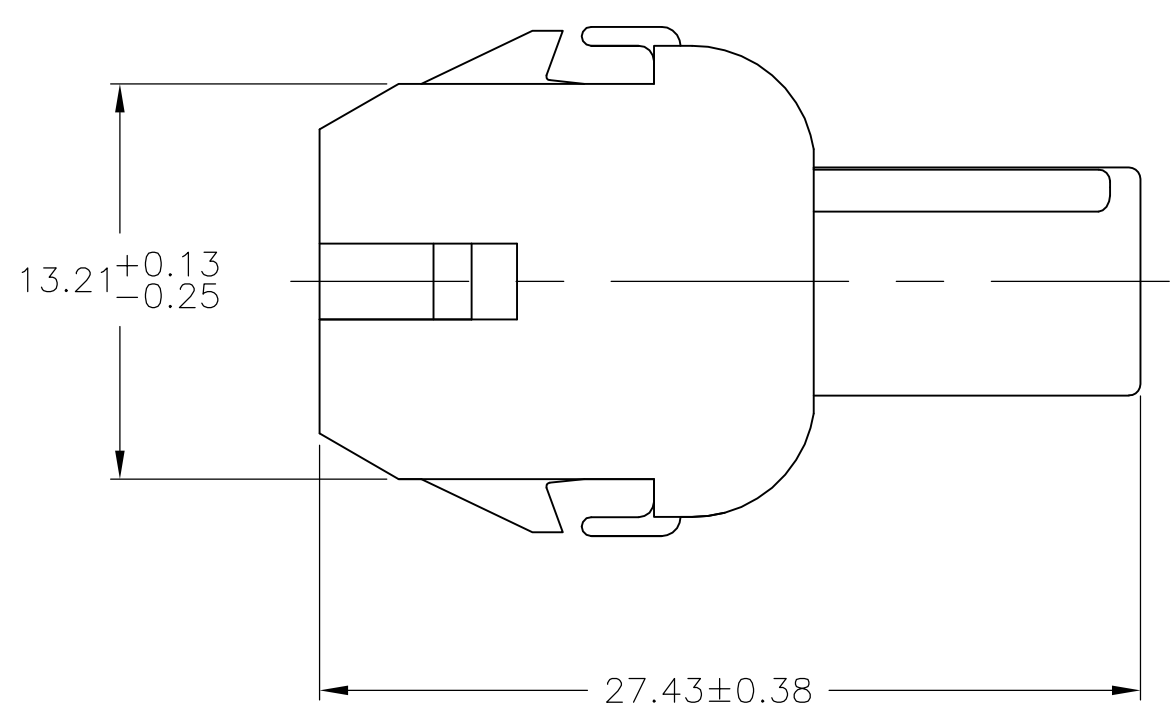

1. MATES WITH APPROPRIATE UNIVERSAL MATE-N-LOK™ PLUG.
2. RECOMMENDED PANEL THICKNESS 0.76 – 2.29.
3. PANEL MUST BE PUNCHED SO THAT THE HOUSING ENTERS THE PANEL IN THE SAME DIRECTION AS THE PUNCH.
4. OPTIONAL FOR KEYING HOUSING IN PANEL.
5. CIRCUIT NUMBER 1 LOCATION.
6. DIMENSIONS SHOWN REPRESENT PRODUCT IN DRY, AS MOLDED, CONDITION. ADDITIONAL 2% GROWTH DUE TO SUBSEQUENT MOISTURE ABSORPTION MAY OCCUR AND SHOULD BE ACCOUNTED FOR.
7. FOUR RIBS EQUALLY SPACED, NO SPECIFIC ORIENTATION. NO RIBS OR SIX RIBS EQUALLY SPACED, NO SPECIFIC ORIENTATION, OPTIONAL.
8. UNDERWRITERS RECOGNIZED COMPONENT LOGO AND CSA CERTIFICATION LOGO TO BE LOCATED ONCE EACH ON SIDE OF HOUSING.

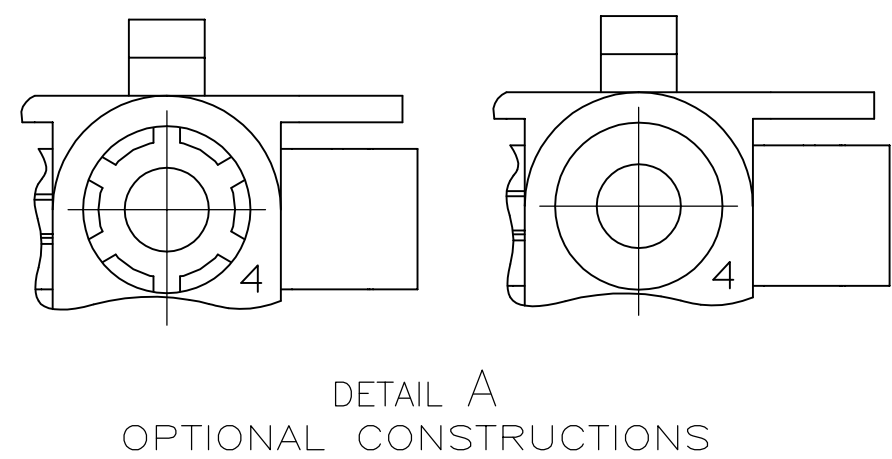


RECOMMENDED PANEL CUT OUT

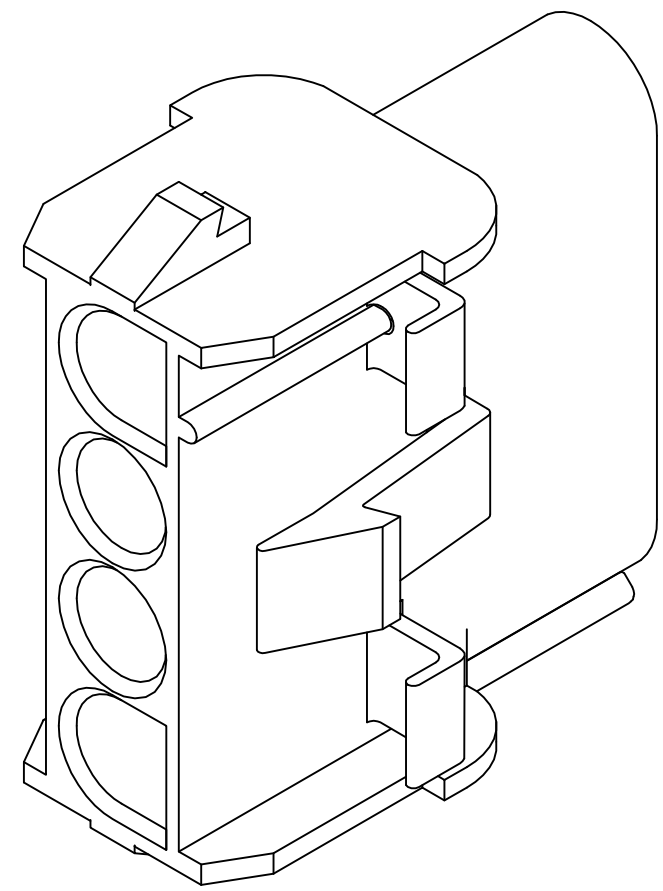

3-DIMENSIONAL MODELS

4.45	.175	27.43	1.080
2.79	.110	27.05	1.065
2.54	.100	26.67	1.050
2.41	.095	13.46	.530
2.29	.090	13.21	.520
0.76	.030	8.64	.340
0.38	.015	8.13	.320
0.25	.010	7.62	.300
0.13	.005	6.35	.250
MM	IN	MM	IN
CONVERSION TABLE			

CUSTOMER RESTRICTED	NATURAL	350780-2
	BLACK	1-350780-9
	GRAY	1-350780-8
	BLUE	1-350780-6
	GREEN	1-350780-5
	YELLOW	1-350780-4
	ORANGE	1-350780-3
	RED	1-350780-2
	BROWN	1-350780-1
	NATURAL	350780-1
COLOR	PART NUMBER	

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN K.L. WHITAKER 15JUL92 CHK R. SWING 15JUL92 APP'D D. SELF 20JUL92		 TE Connectivity	
DIMENSIONS: mm		TOLERANCES, UNLESS OTHERWISE SPECIFIED: 0.125" ± .005 .005" ± .001 .001" ± .0005 ANGLES ± 1°		NAME CAP.4 CIRCUIT, UNIVERSAL MATE-N-LOK™ —	
		PRODUCT SPEC APPLICATION SPEC		SIZE GAGE CODE DRAWING NO A1 00779 C-350780	
MATERIAL NYLON,UL 94V-0		WEIGHT 0.000000		RESTRICTED TO —	
FINISH —		CUSTOMER DRAWING		SCALE 4:1 SHEET 1 of 1 REV V4	