



Series: CERAMIC CHIP

Description: GNSS-DUAL WIFI-DSRC ANT


PART NUMBER: W3095


Features:

- 3 in 1 solution on a ceramic chip with two separate feeds.
- Need smaller antenna space on PCB to integrate GPS/GLONASS, Dual WiFi and DSRC bands
- Compact Size (L x W x H) 10 x 3.2 x 1.5mm.
- Fully SMD compatible

Applications:

- GPS / GLONASS (1575-1610MHz)
- IEEE 802.11 a/b/g/n compliant 2.4 and 5GHz. (2400-2485/ 4900-5850MHz)
- DSRC (5850-5925MHz)
- Mobile navigation device

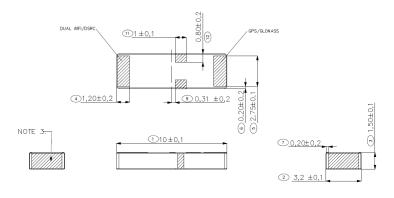



All dimensions are in mm / inches

Issue: 1804

In the effort to improve our products, we reserve the right to make changes judged to be necessary. CONFIDENTIAL AND PROPRIETARY INFORMATION

This document contains confidential and proprietary information of Pulse Electronics, Inc. (Pulse) and is protected by copyright, trade secret and other state and federal laws. Its receipt or possession does not convey any rights to reproduce, disclose its contents, or to manufacture, use or sell anything it may describe. Reproduction, disclosure or use without specific written authorization of Pulse is strictly forbidden. For more information:

Pulse Worldwide Headquarters 15255 Innovation Drive #100 San Diego, CA 92128 USA Tel:1-858-674-8100 Pulse/Larsen Antennas 18110 SE 34th St Bldg 2 Suite 250 Vancouver, WA 98683 USA Tel: 1-360-944-7551 Europe Headquarters Pulse GmbH & Do, KG Zeppelinstrasse 15 Herrenberg, Germany Tel: 49 7032 7806 0 Pulse (Suzhou) Wireless Products Co, Inc. 99 Huo Ju Road(#29 Bldg,4th Phase Suzhou New District Jiangsu Province, Suzhou 215009 PR China Tel: 86 512 6807 9998





Series: CERAMIC CHIP

PART NUMBER: W3095

ELECTRICAL SPECIFICATIONS

ELECTRICAL SPECIFICATIONS			
Frequency, Port 1	1.575-1.610 GHZ		
Frequency, Port 2	2.4-2.485/ 4.9-5.925 GHz		
Normal Impedance	50 Ohm		
VSWR, Port 1	<2.5:1		
VSWR, Port 2	<2:1at low band <2.8:1 at high band		
Efficiency (Typ.), Port 1	60 %		
Efficiency (Typ.), Port 2	80/ 50 %		
Peak Gain, Port 1	1.5 dBi		
Peak Gain, Port 2	2.5/ 3.5 dBi		
Isolation (Min.) at 1.575-1.610 GHz	22 dB		
Isolation (Min.) at 2.4-2.485 GHz	20 dB		
Isolation (Min.) at 4.9-5.925 GHz	22 dB		
Polarization	Linear		
Interface	SMD Mount		



TECHNICAL DATA SHEET

Description: GNSS-DUAL WIFI-DSRC ANT

Series: CERAMIC CHIP

PART NUMBER: W3095

MECHANICAL SPECIFICATIONS

Block material Dielectric ceramic

Plating material Ag

Weight 0.24 g

RoHS Compliant Product

Tape and reel packing

Lead free materials

Lead free soldering compatible

ENVIRONMENTAL SPECIFICATIONS

Operating temperature

-30 to +80° C








Series: CERAMIC CHIP


PART NUMBER: W3095

MECHANICAL DRAWING

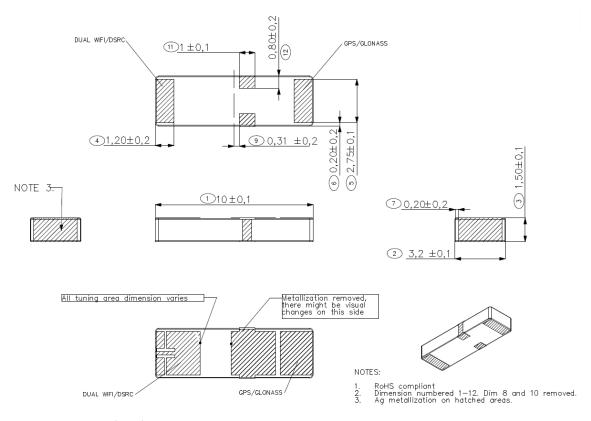

Dimensions: (mm)

Details of antenna pad dimension on the bottom in mm.

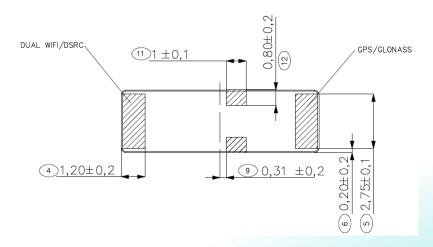

Issue: 1804








Series: CERAMIC CHIP

PART NUMBER: W3095

OTHER SPECIFICATIONS

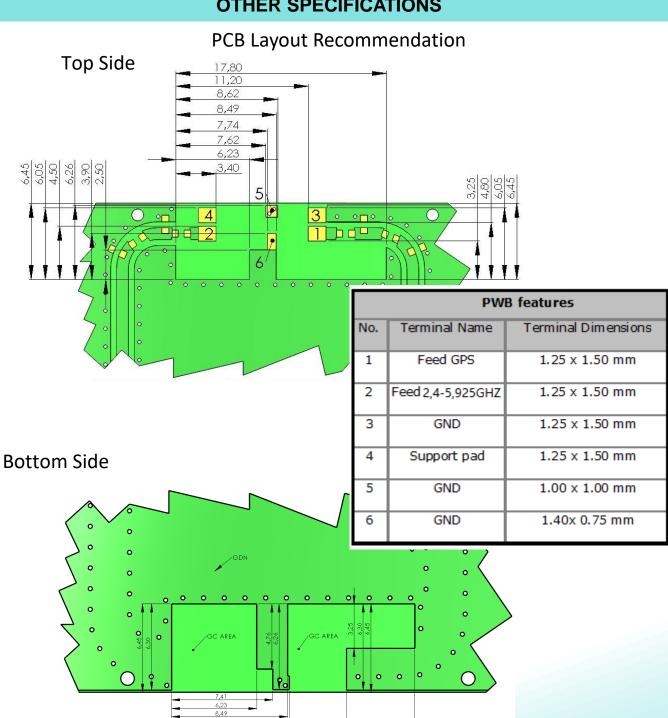

Issue: 1804







Series: CERAMIC CHIP

PART NUMBER: W3095

OTHER SPECIFICATIONS

Antenna Alignment on PCB Layout

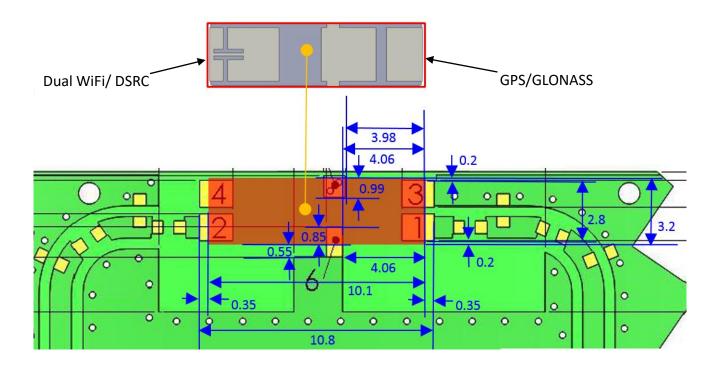








Series: CERAMIC CHIP

PART NUMBER: W3095

OTHER SPECIFICATIONS

Suggested Matching on PCB

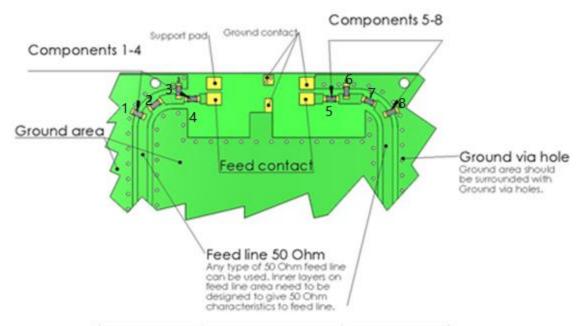

Antenna	Component NO.	Value
2.4-5.925GHz	1	Optional, not in use
2.4-5.925GHz	2	0 Ohm
2.4-5.925GHz	3	2.2nH
2.4-5.925GHz	4	1.2pF
GPS/Glonass	5	0 Ohm
GPS/Glonass	6	1.8pF
GPS/Glonass	7	0 Ohm
GPS/Glonass	8	Optional, not in use






Series: CERAMIC CHIP

PART NUMBER: W3095


CHARTS

Typical GPS/GLONASS antenna Return Loss

LOG

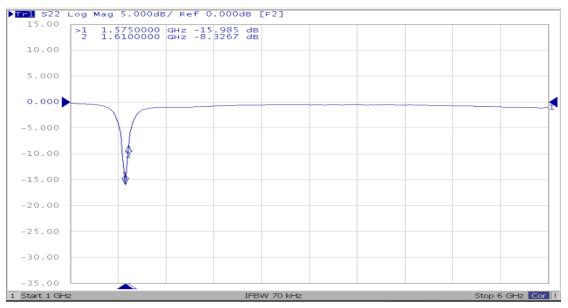

VSWR

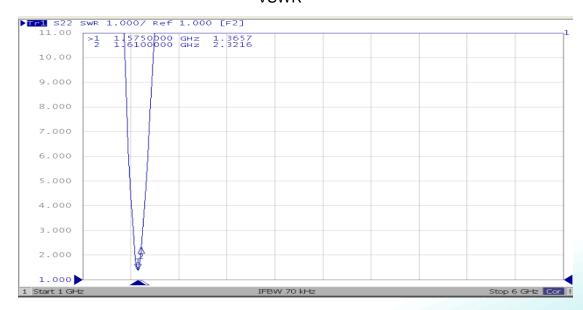






Series: CERAMIC CHIP


PART NUMBER: W3095

CHARTS

Typical WIFI antenna Return Loss

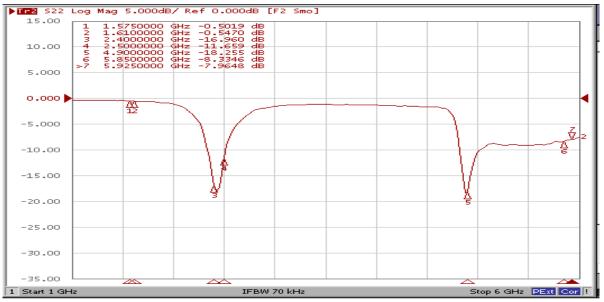

VSWR

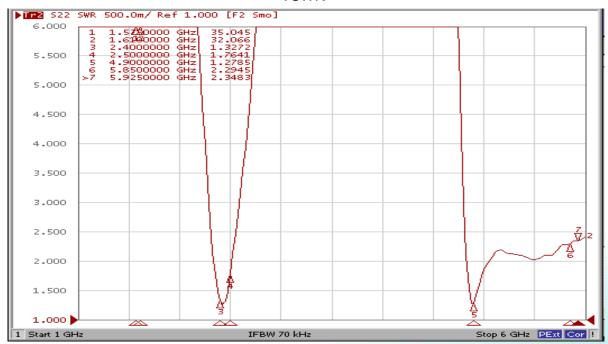

Issue: 1804

RóHS






Series: CERAMIC CHIP

PART NUMBER: W3095

CHARTS

Typical Isolation

Isolation

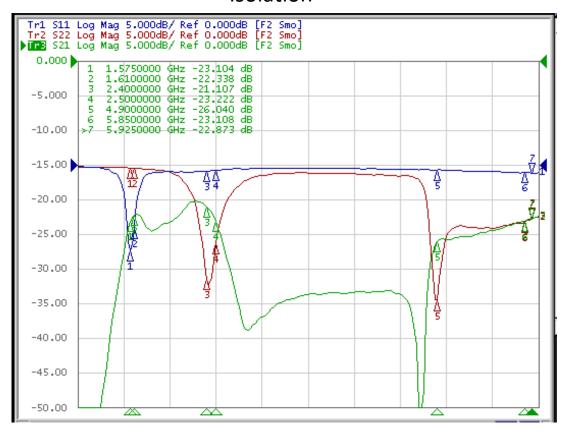





Series: CERAMIC CHIP

70%

65%

55%

1575

1580

1585

PART NUMBER: W3095

CHARTS

Typical Antenna Total Efficiency

GPS/GLONASS

60% ——Efficiency(%)

50%

1590

Frequency/MHz

1600

1605

1610

1595

WIFI/DSKC

90%

70%

——Efficiency(%)

Frequency/MHz

50%









Series: CERAMIC CHIP

PART NUMBER: W3095

CHARTS

Typical Antenna Peak Gain

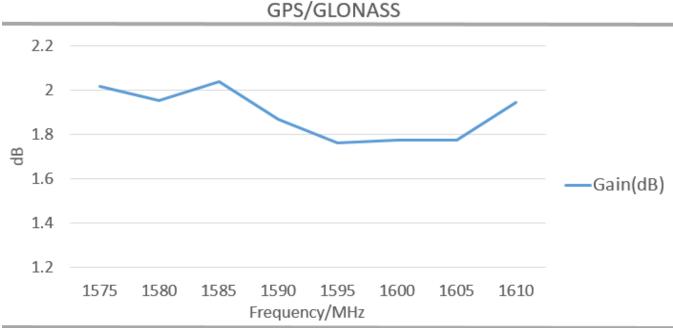

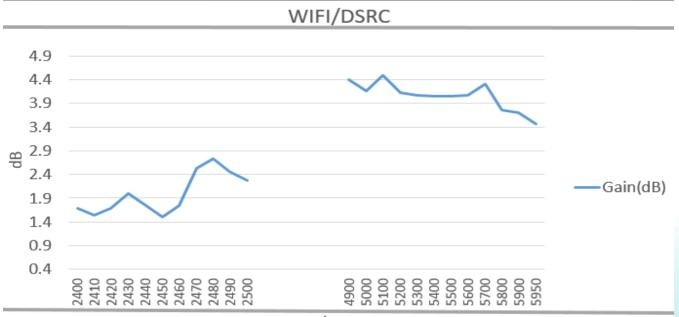

Frequency/MHz









Series: CERAMIC CHIP


PART NUMBER: W3095

CHARTS

Typical free space radiation pattern—GPS/GLONASS

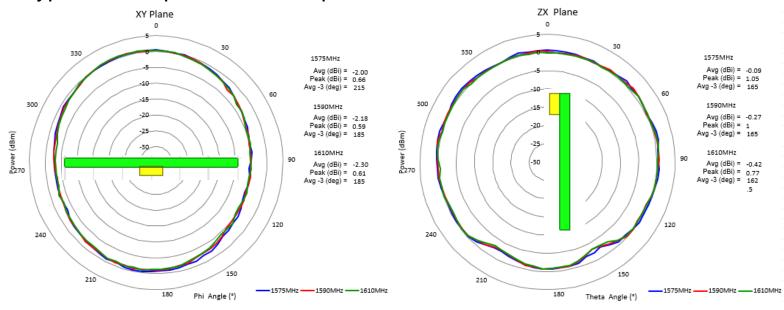

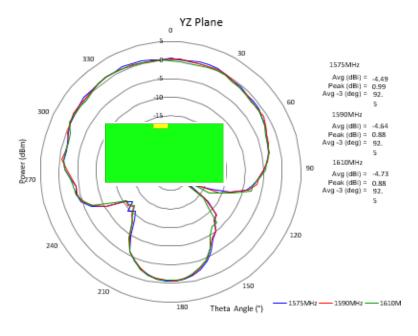

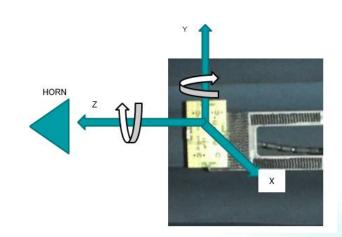

Issue: 1804






Series: CERAMIC CHIP


Description: GNSS-DUAL WIFI-DSRC ANT


PART NUMBER: W3095


CHARTS

Typical free space radiation pattern—2.4G

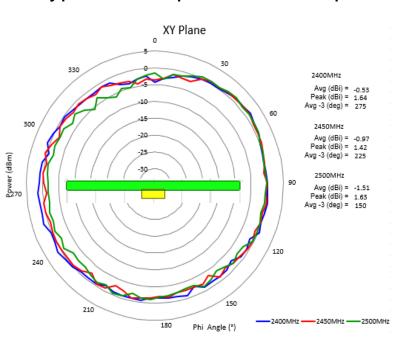

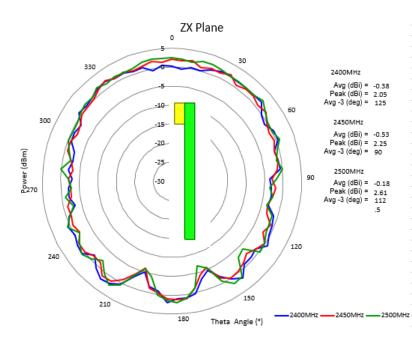

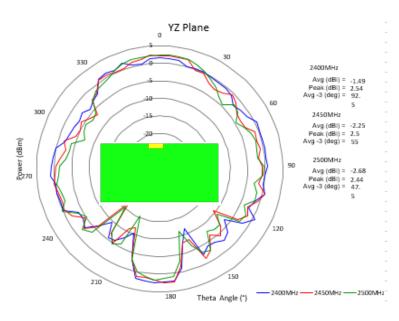

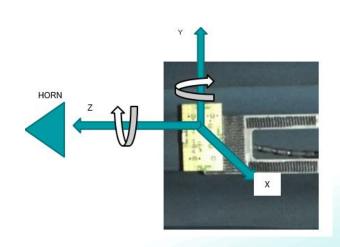

Issue: 1804

ROHS

14







Series: CERAMIC CHIP


PART NUMBER: W3095


CHARTS

Typical free space radiation pattern—5G

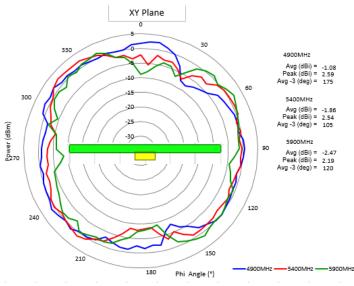

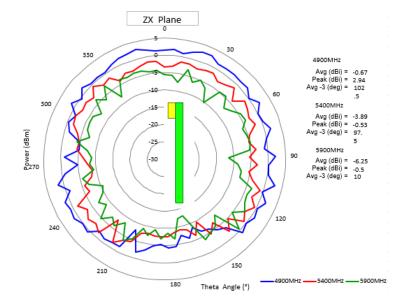

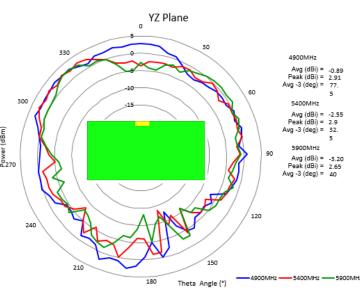

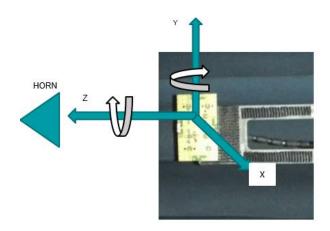






Series: CERAMIC CHIP

PART NUMBER: W3095

PACKAGING

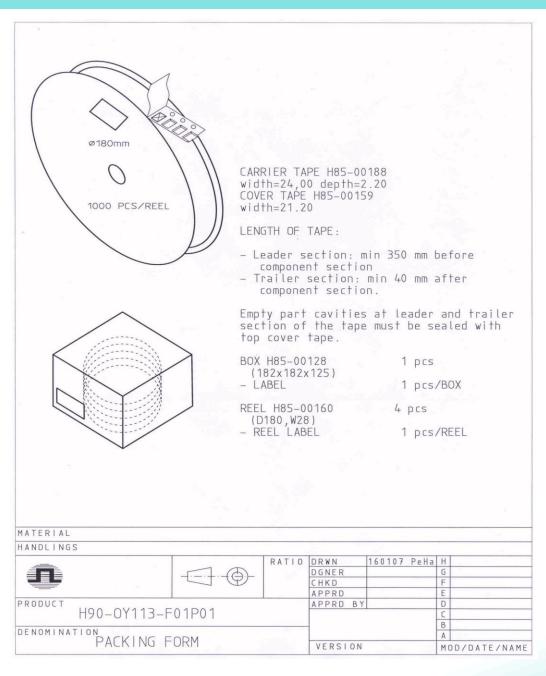





Series: CERAMIC CHIP

PART NUMBER: W3095

Block Orientation

Antenna soldering pads facing down to the bottom of the carrier tape

Top view of the carrier tape

