



## Temperature Compensated Zener Reference Diodes

Qualified per MIL-PRF-19500/156

Qualified Levels:  
JAN, JANTX,  
JANTXV and JANS

### DESCRIPTION

The popular 1N935BUR-1 through 1N938BUR-1 series of Zero-TC (Temperature Compensated) reference diodes provides a selection of 9.0 V nominal voltages and temperature coefficients to as low as 0.001 %/°C for minimal voltage change with temperature when operated at 7.5 mA. These glass surface mount DO-213AA reference diodes are also available in JAN, JANTX, JANTXV and JANS military qualifications. For commercial applications it is also available as RoHS compliant (not applicable to military).

**Important:** For the latest information, visit our website <http://www.microsemi.com>.

### FEATURES

- Surface mount equivalent of JEDEC registered 1N935 through 1N938 number series.
- Standard reference voltage of 9.0V +/- 5%.
- Temperature compensated.
- Internal metallurgical bond.
- Double plug construction.
- JAN, JANTX, JANTXV and JANS qualification are available per MIL-PRF-19500/156.
- RoHS compliant versions available (commercial grade only).


### APPLICATIONS / BENEFITS

- Provides minimal voltage changes over a broad temperature range.
- For instrumentation and other circuit designs requiring a stable voltage reference.
- Maximum temperature coefficient selections available from 0.01 %/°C to 0.001 %/°C.
- MELF surface mount.
- Non-sensitive to ESD per MIL-STD-750 method 1020.

### MAXIMUM RATINGS @ T<sub>A</sub> = 25 °C unless otherwise stated

| Parameters/Test Conditions       | Symbol                              | Value       | Unit |
|----------------------------------|-------------------------------------|-------------|------|
| Junction and Storage temperature | T <sub>J</sub> and T <sub>STG</sub> | -65 to +175 | °C   |
| Power Dissipation <sup>(1)</sup> | P <sub>D</sub>                      | 500         | mW   |
| Maximum Zener Current            | I <sub>ZM</sub>                     | 50          | mA   |
| Solder Pad Temperatures at 10 s  | T <sub>SP</sub>                     | 260         | °C   |

**Notes:** 1. @ T<sub>EC</sub> = 50 °C (see [figure 1](#)). For optimum voltage-temperature stability, I<sub>Z</sub> = 7.5 mA (less than 50 mW in dissipated power). Derate at 3.33 mW/°C above T<sub>A</sub> = +25 °C.



**DO-213AA MELF  
Package**

Also available in:

**DO-35 (DO-204AH)  
package**  
(axial-leaded)

 [1N935B-1 – 1N938B-1](#)

#### MSC – Lawrence

6 Lake Street,  
Lawrence, MA 01841  
1-800-446-1158  
Tel: (978) 620-2600  
Fax: (978) 689-0803

#### MSC – Ireland

Gort Road Business Park,  
Ennis, Co. Clare, Ireland  
Tel: +353 (0) 65 6840044  
Fax: +353 (0) 65 6822298


#### Website:

[www.microsemi.com](http://www.microsemi.com)

### MECHANICAL and PACKAGING

- CASE: Hermetically sealed glass case package.
- TERMINALS: Tin/lead plated or RoHS compliant matte-tin (on commercial grade only) over copper clad steel. Solderable per MIL-STD-750, method 2026.
- POLARITY: Cathode end is banded.
- MOUNTING: The axial coefficient of expansion (COE) of this device is approximately +6PPM/°C. The COE of the mounting surface system should be selected to provide a suitable match with this device.
- MARKING: Part number.
- TAPE & REEL option: Standard per EIA-296. Consult factory for quantities.
- WEIGHT: Approximately 0.04 grams.
- See [Package Dimensions](#) on last page.

### PART NOMENCLATURE

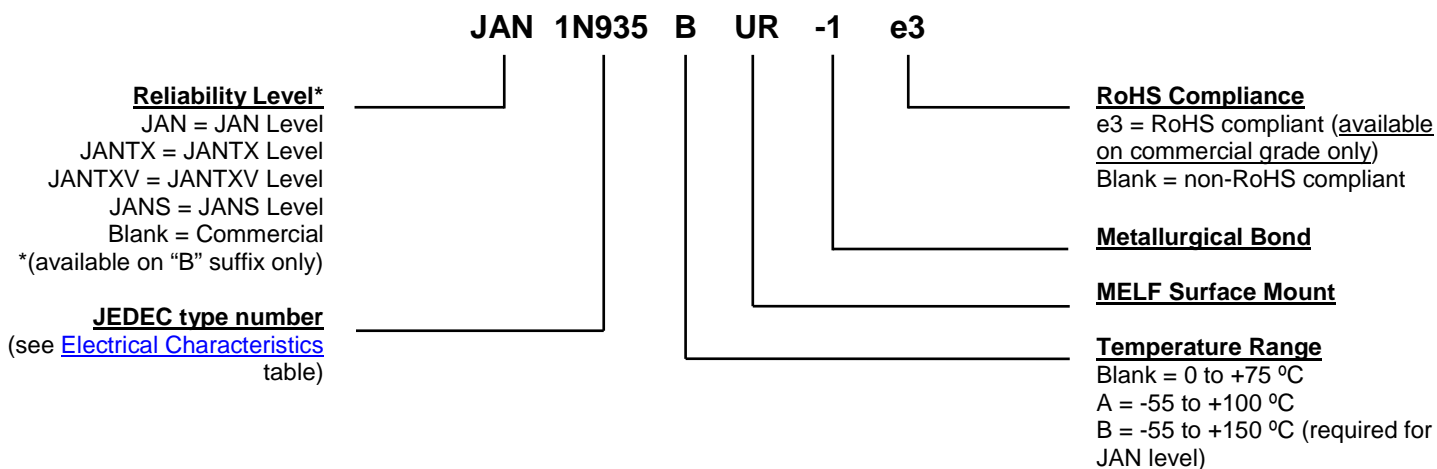

### SYMBOLS & DEFINITIONS

| Symbol                      | Definition  |
|-----------------------------|---|
| $I_{ZM}$                    | Maximum Zener Current: The maximum rated dc current for the specified power rating.   |
| $I_Z$ , $I_{ZT}$ , $I_{ZK}$ | Regulator Current: The dc regulator current ( $I_Z$ ), at a specified test point ( $I_{ZT}$ ), near breakdown knee ( $I_{ZK}$ ).  |
| $V_Z$                       | Zener Voltage: The Zener voltage the device will exhibit at a specified current ( $I_Z$ ) in its breakdown region.  |
| $Z_{ZT}$ or $Z_{ZK}$        | Dynamic Impedance: The small signal impedance of the diode when biased to operate in its breakdown region at a specified rms current modulation (typically 10% of $I_{ZT}$ or $I_{ZK}$ ) and superimposed on $I_{ZT}$ or $I_{ZK}$ respectively. |

**ELECTRICAL CHARACTERISTICS @ 25 °C unless otherwise specified**


| MIL-PRF-19500/156 | MSC TYPE NUMBER (Note 1) | ZENER VOLTAGE<br>$V_Z @ I_{ZT}$ | ZENER TEST CURRENT<br>$I_{ZT}$ | MAXIMUM ZENER IMPEDANCE (Note 2)<br>$Z_{ZT}$ | VOLTAGE TEMPERATURE STABILITY<br>$\Delta V_{ZT}$ MAXIMUM (Note 3) | TEMPERATURE RANGE | EFFECTIVE TEMPERATURE COEFFICIENT<br>$\alpha_{VZ}$ |
|-------------------|--------------------------|---------------------------------|--------------------------------|--|---|-------------------|--|
|                   |                          | Volts                           | mA                             | Ohms   | mV  | °C                | % / °C   |
| 1N935BUR-1        | CDLL935                  | 8.55 – 9.45                     | 7.5                            | 20   | 67  | 0 to +75          | 0.01   |
|                   | CDLL935A                 | 8.55 – 9.45                     | 7.5                            | 20   | 139   | -55 to +100       | 0.01   |
|                   | CDLL935B                 | 8.55 – 9.45                     | 7.5                            | 20   | 184   | -55 to +150       | 0.01   |
|                   | CDLL936                  | 8.55 – 9.45                     | 7.5                            | 20   | 34  | 0 to +75          | 0.005  |
|                   | CDLL936A                 | 8.55 – 9.45                     | 7.5                            | 20   | 70  | -55 to +100       | 0.005  |
|                   | CDLL936B                 | 8.55 – 9.45                     | 7.5                            | 20   | 92  | -55 to +150       | 0.005  |
| 1N937BUR-1        | CDLL937                  | 8.55 – 9.45                     | 7.5                            | 20   | 13  | 0 to +75          | 0.002  |
|                   | CDLL937A                 | 8.55 – 9.45                     | 7.5                            | 20   | 28  | -55 to +100       | 0.002  |
|                   | CDLL937B                 | 8.55 – 9.45                     | 7.5                            | 20   | 37  | -55 to +150       | 0.002  |
| 1N938BUR-1        | CDLL938                  | 8.55 – 9.45                     | 7.5                            | 20   | 6.7   | 0 to +75          | 0.001  |
|                   | CDLL938A                 | 8.55 – 9.45                     | 7.5                            | 20   | 13.9  | -55 to +100       | 0.001  |
|                   | CDLL938B                 | 8.55 – 9.45                     | 7.5                            | 20   | 19  | -55 to +150       | 0.001  |

**NOTE 1:** Microsemi CDLL prefixed numbers are commercial use only. For high-reliability applications JAN prefixed 1N numbers must be selected along with the B suffix.


**NOTE 2:** Zener impedance is derived by superimposing on  $I_{ZT}$  A 60 Hz rms ac current equal to 10% of  $I_{ZT}$ .

**NOTE 3:** The maximum allowable change observed over the entire temperature range i.e., the diode voltage will not exceed the specified mV at any discrete temperature between the established limits, per JEDEC standard No. 5.


# GRAPHS

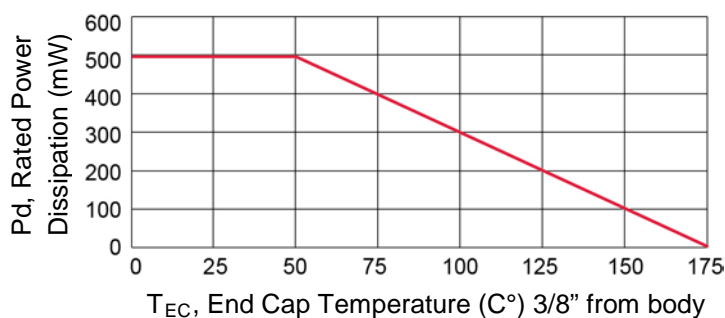


**FIGURE 1**  
Power Derating Curve

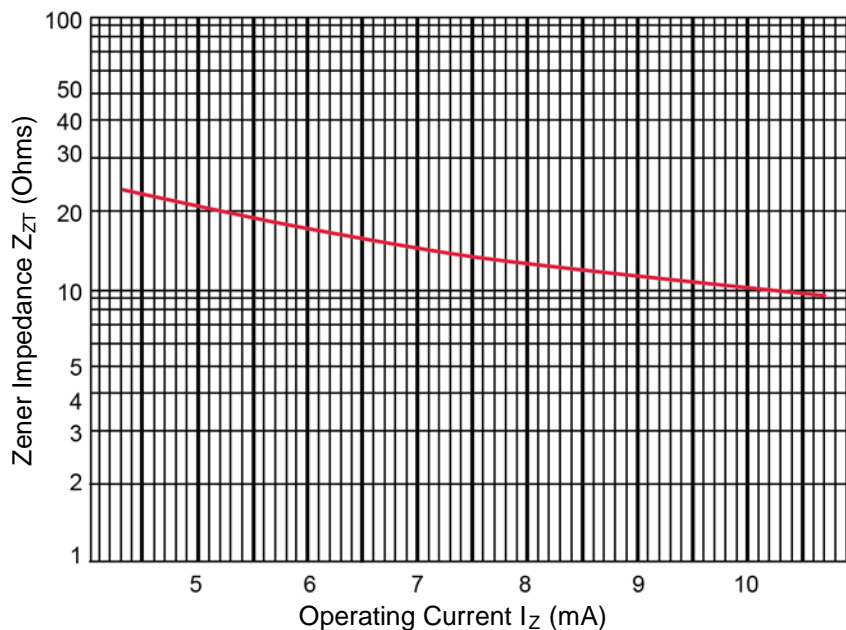

**FIGURE 2**  
Zener Impedance vs. Operating Current

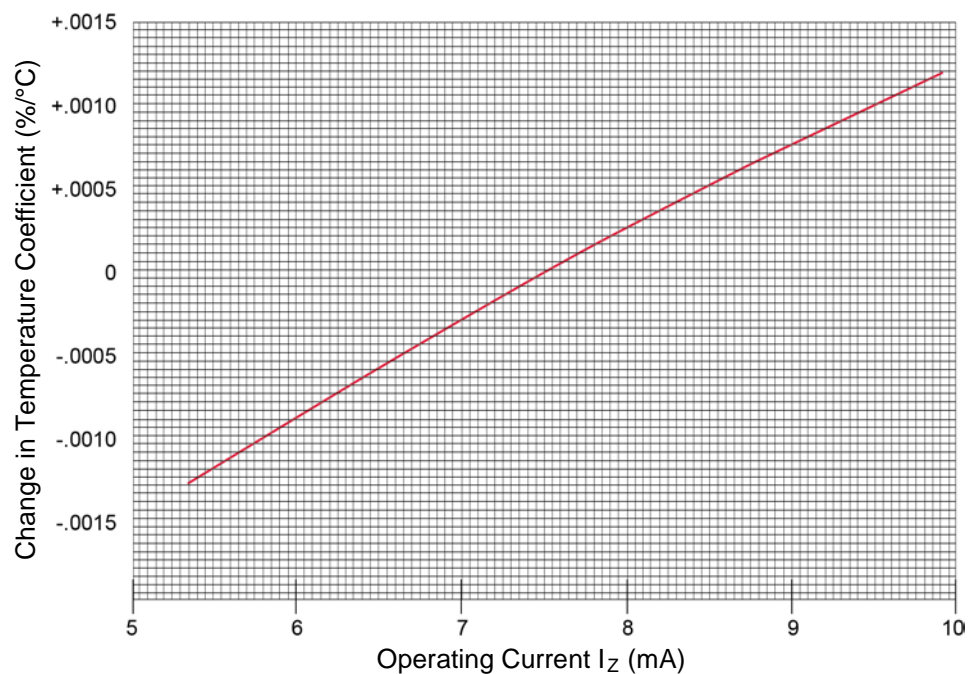**GRAPHS**



**FIGURE 3**  
Typical Change of Temperature Coefficient with Change in Operating Current

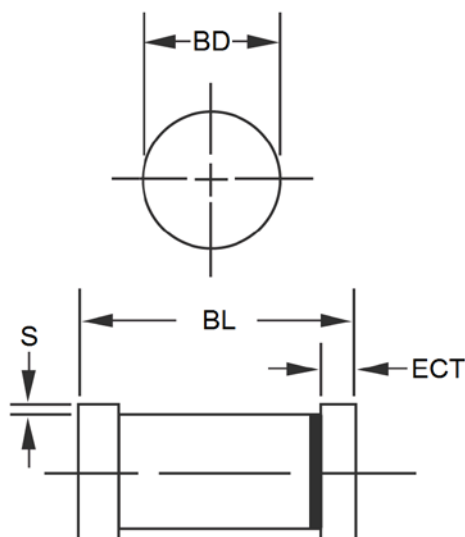**PACKAGE DIMENSIONS**


| DIM        | INCH  |       | MILLIMETERS |      |
|------------|-------|-------|-------------|------|
|            | MIN   | MAX   | MIN         | MAX  |
| <b>BD</b>  | 0.063 | 0.067 | 1.60        | 1.70 |
| <b>BL</b>  | 0.130 | 0.146 | 3.30        | 3.71 |
| <b>ECT</b> | 0.016 | 0.022 | 0.41        | 0.56 |
| <b>S</b>   | 0.001 | -     | 0.03        | -    |

**NOTES:**

1. Dimensions are in inches. Millimeters are given for general information only.
2. Dimensions are pre-solder dip.
3. Referencing to dimension S, minimum clearance of glass body to mounting surface on all orientations.
4. In accordance with ASME Y14.5M, diameters are equivalent to  $\Phi$ x symbology.

**PAD LAYOUT**


|          | INCH  | mm   |
|----------|-------|------|
| <b>A</b> | 0.200 | 5.08 |
| <b>B</b> | 0.055 | 1.40 |
| <b>C</b> | 0.080 | 2.03 |

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

## Microchip:

[CDLL938A/TR](#) [CDLL936/TR](#) [CDLL936B/TR](#) [CDLL937/TR](#) [CDLL936A/TR](#) [CDLL937A/TR](#) [1N935BUR-1/TR](#)  
[CDLL935B/TR](#) [CDLL935A/TR](#) [CDLL938/TR](#) [CDLL938B/TR](#) [CDLL937B/TR](#) [CDLL935/TR](#) [JANTX1N937BUR-1](#)  
[JANS1N935BUR-1](#) [JANTX1N935BUR-1](#)