
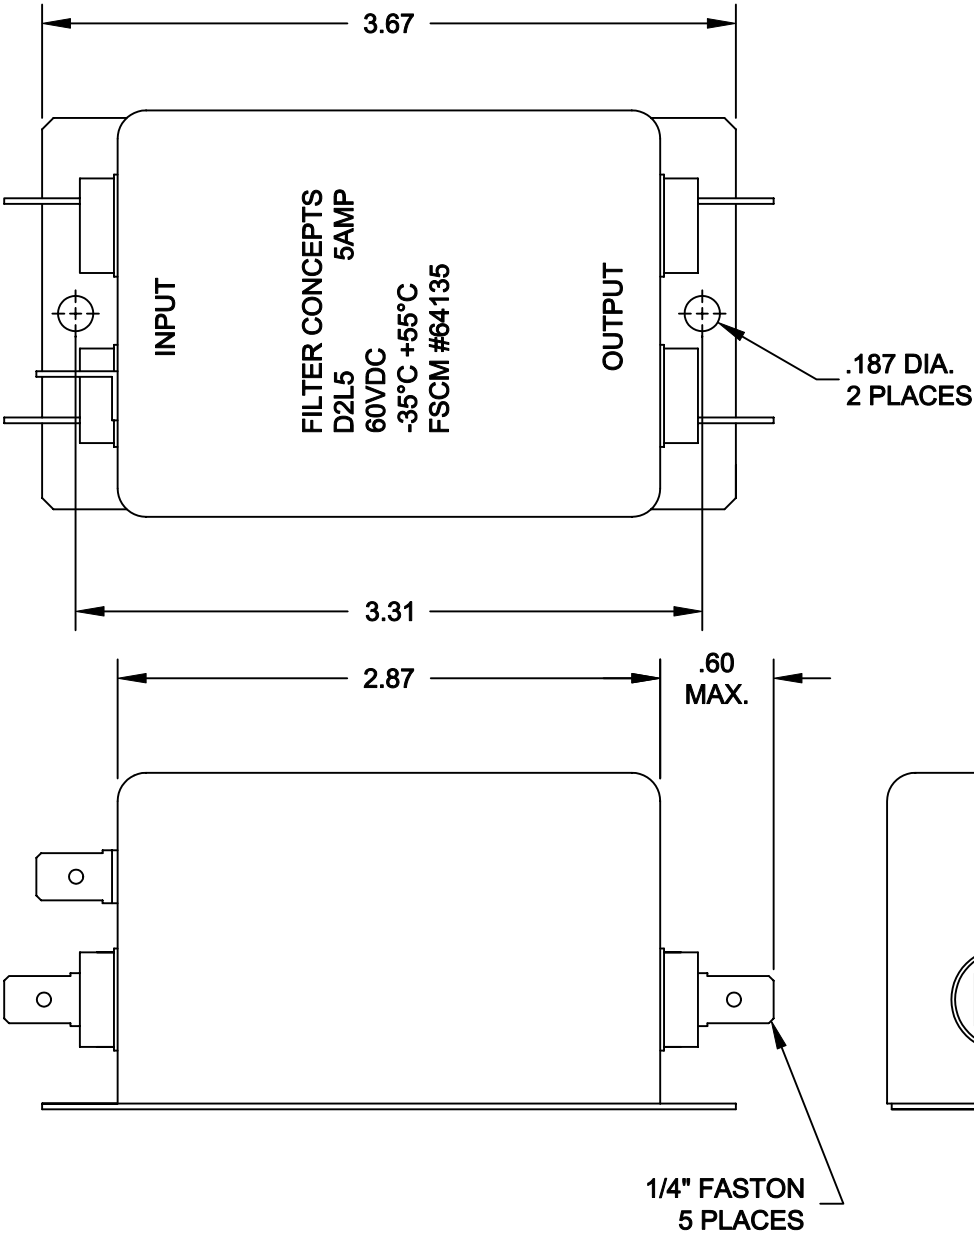


SPECIFICATIONS


1. CASE:
24 GA. (.024) CRS, TIN PLATED
2. RATED CURRENT:
5A
3. RATED VOLTAGE:
60VDC
4. TEST VOLTAGE:
LINE TO GROUND: 150VDC

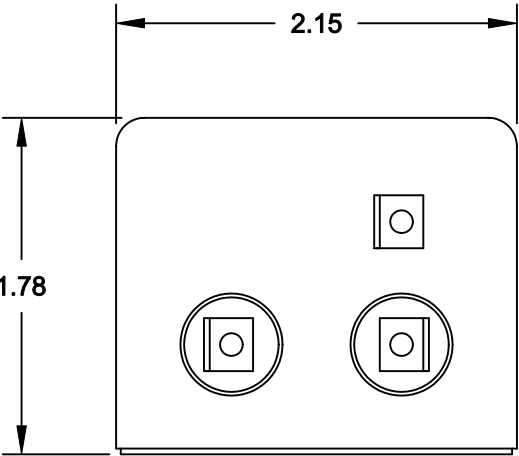

INSERTION LOSS (50 Ω TYPICAL)

	.02 MHz	.15 MHz	.50 MHz	1.5 MHz	5.0 MHz	50 MHz
L/L	20 db	50 db	60 db	60 db	60 db	60 db
L/G	18 db	45 db	60 db	60 db	60 db	50 db

SCHEMATIC

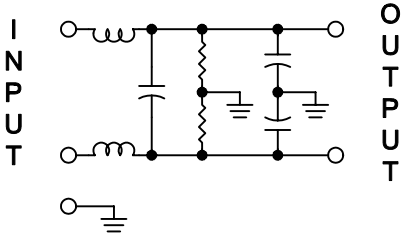

NEXT ASSY	USED ON
APPLICATION	

UNLESS OTHERWISE SPECIFIED
DIMENSIONS ARE INCHES
TOLERANCES ARE:
FRACTIONS DECIMALS ANGLES
± .XX ±.030 ±
.XXX ±.010

CONTRACT NO.

APPROVALS DATE
DRAWN GIANH TRINH 07-16-02
CHECKED DANNIEL VUONG 08-08-02

FINISH

SIZE
B

SCALE 1/1

CODE IDENT NO.

DRAWING NO.
7423

SHEET 1 OF 1

FILTER CONCEPTS INC.

APPLICATION DRAWING
D2L5 FILTER

REVISION			
LTR	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	08-08-02	LE
B	REVISED MARKING	07-09-03	LE