
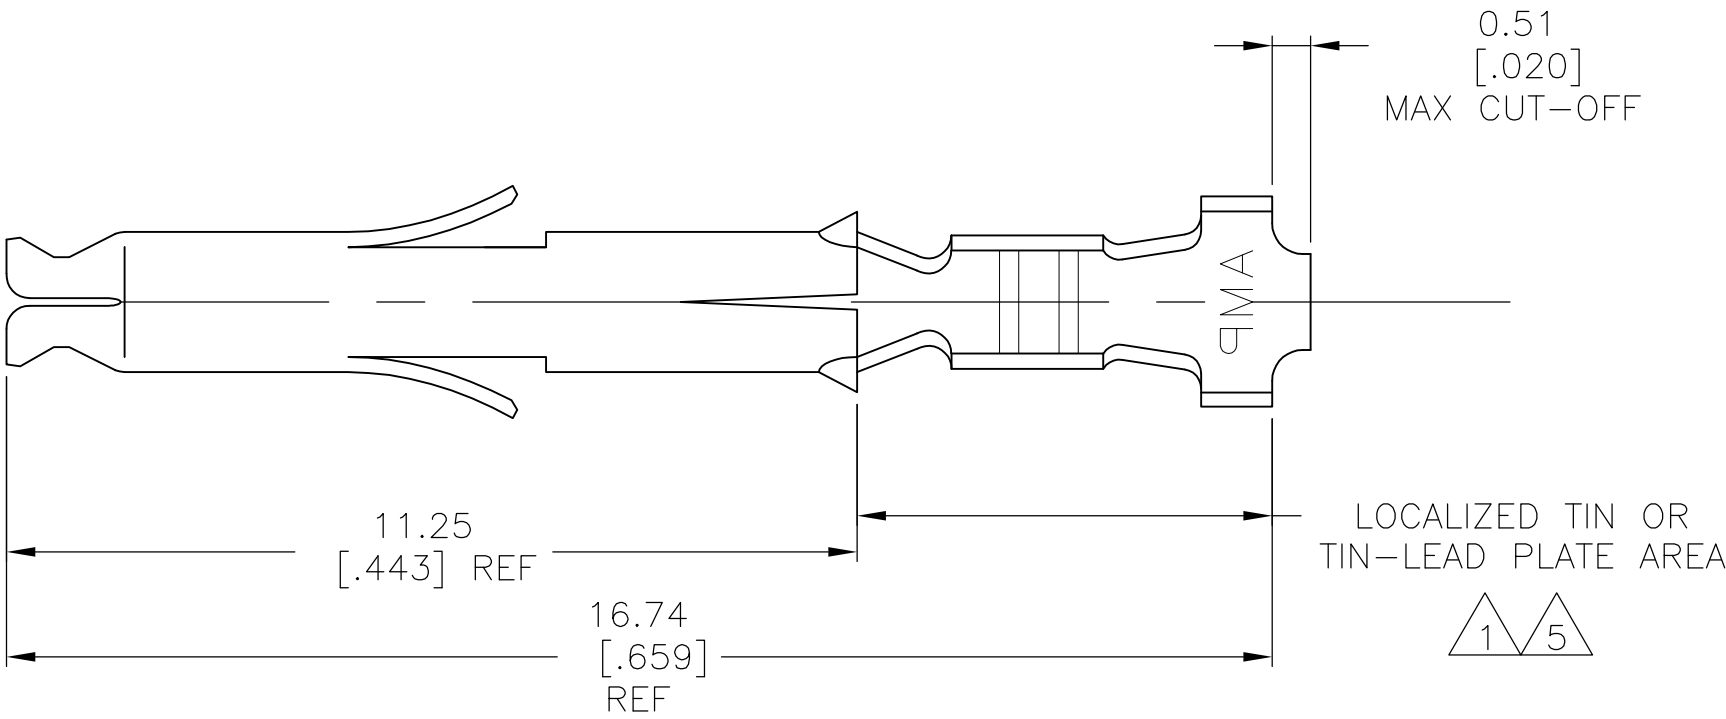


LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
CM	00						
			P1	REVISED PER ECO-11-004587	11MAR11	RK	HMR

D

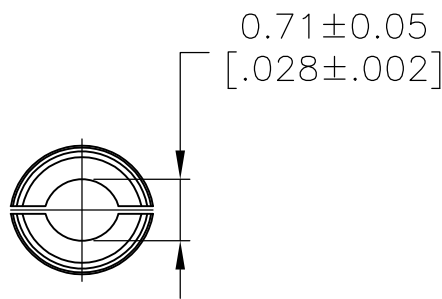

- 1

0.00076 [.000030] MIN GOLD IN LOCALIZED GOLD PLATE AREA AND 0.00254 [.000100] MIN BRIGHT TIN-LEAD IN LOCALIZED TIN-LEAD PLATE AREA OVER 0.00130 [.000050] MIN NICKEL.
- 2

WIRE RANGE: 0.12 – 0.4mm² (26-22 AWG).
- 3



INSULATION RANGE: 1.20-1.75[.047-.069] DIA.
- 4

DIMENSIONS IN BRACKETS ARE IN INCHES.

- 5


0.00076 [.000030] MIN GOLD IN LOCALIZED GOLD PLATE AREA AND 0.00254 [.000100] MIN BRIGHT TIN IN LOCALIZED TIN PLATE AREA OVER 0.00130 [.000050] MIN NICKEL.

C

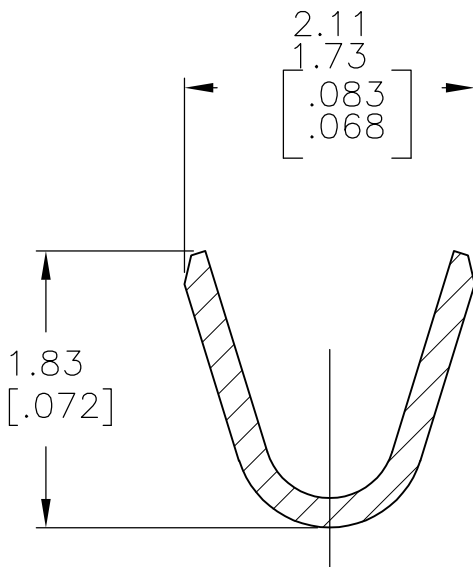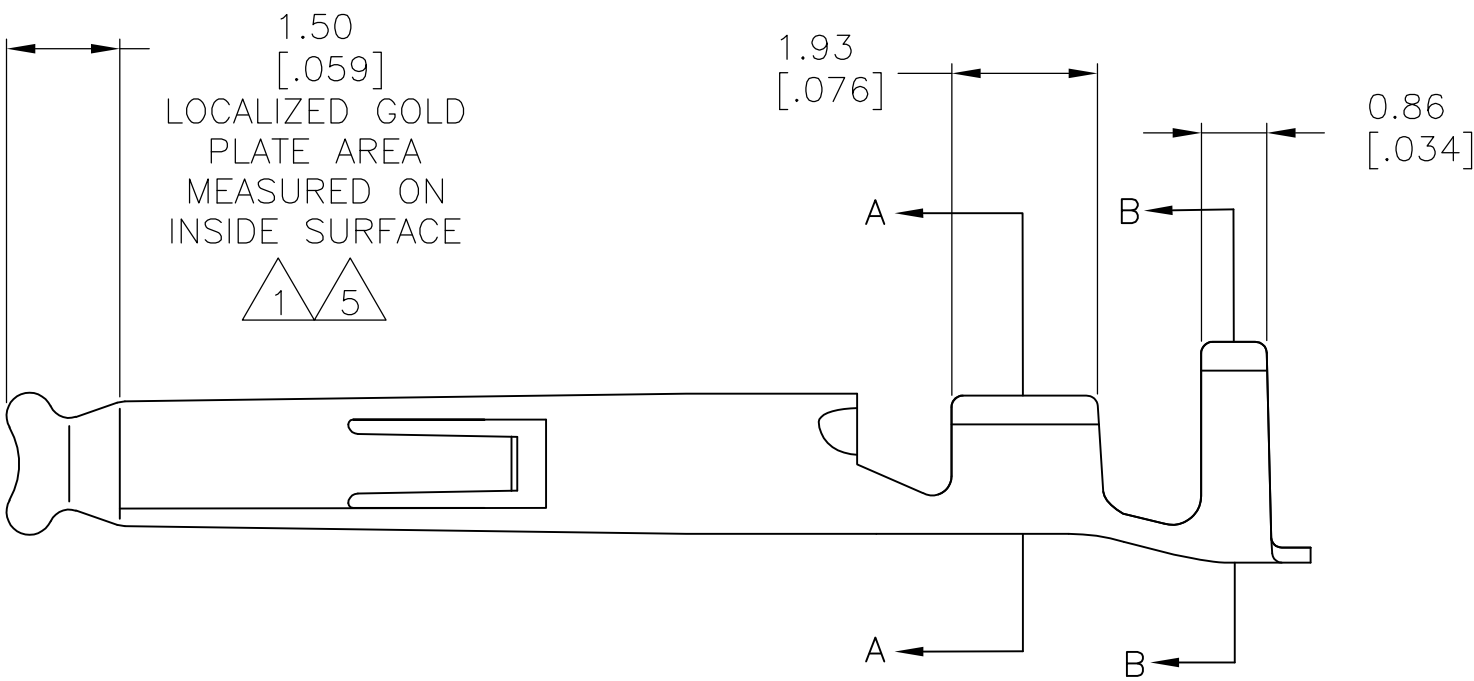

SECTION A-A
SCALE 20:1

B

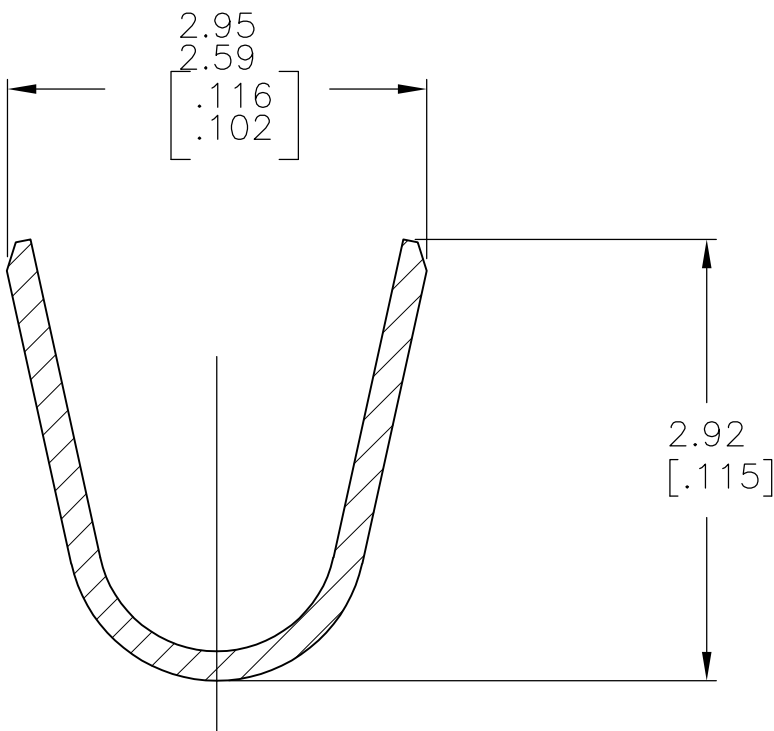

SECTION B-B
SCALE 20:1

5	0.20 [.008] PH BRZ	1-770902-1
5	0.20 [.008] BRASS	1-770902-0
1	0.20 [.008] PH BRZ	770902-6
PRE-TIN	0.20 [.008] PH BRZ	770902-4
1	0.20 [.008] BRASS	770902-3
PRE-TIN	0.20 [.008] BRASS	770902-1
FINISH	MATERIAL	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN S. HOOVER	16OCT02	TE Connectivity			
DIMENSIONS: mm [INCHES]		CHK C. JONES	16OCT02	NAME			
		APVD C. JONES	16OCT02	SOCKET, MINI UNIVERSAL MATE-N-LOK(TM)			
		PRODUCT SPEC					
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APPLICATION SPEC		SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
0 PLC ± - 1 PLC ± - 2 PLC ± - 3 PLC ± 0.15[.006] 4 PLC ± - ANGLES ± 1°				A2	00779	C=770902	-
MATERIAL -		FINISH -		CUSTOMER DRAWING		SCALE 10:1	SHEET 1 OF 1
						REV	P1