



Bestückungsplan / contact layout

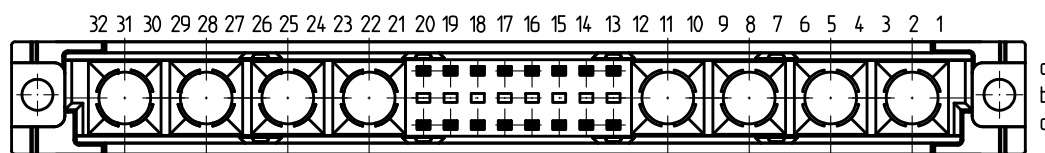

■ bestückt / assemble

Leiterplatten-Lochbild / PCB drillhole pattern

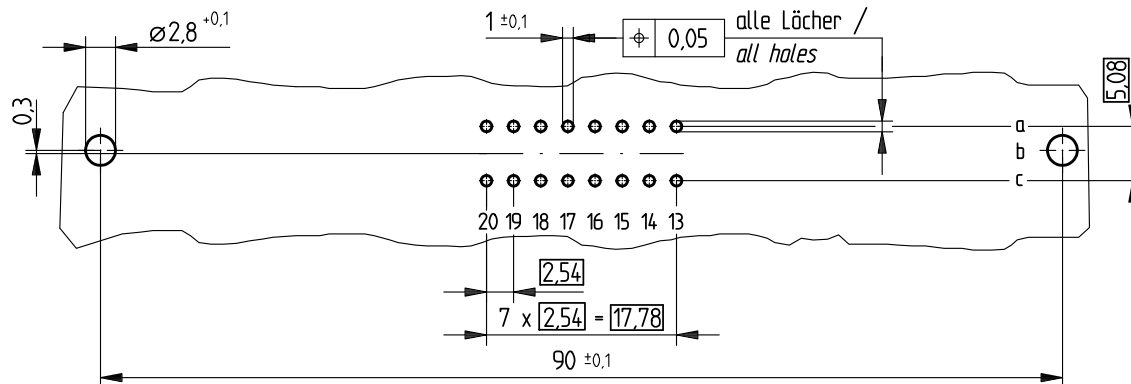

Tauchlötanschluß 0,65 x 0,3 mm / solder terminal 0,65 x 0,3 mm

Isolierwerkstoff / housing material : PBT GF30

Bauart 7 / type 7

Anforderungsstufe 1 = 500 Steckzyklen / performance class 1 = 500 mating cycles

Fehlende Maße und Angaben nach IEC 60 603-2 / DIN EN 60 603-2

Missing information and dimensions per IEC 60 603-2

Bedruckung siehe Zeichnung 294875

Marking see drawing 294875

| | | | | |
|--------------------------------------|--|---|--|-----|
| Information: | Tolerances | All Dimensions in mm | Scale | 2:1 |
| | All rights reserved. Only for information. To insure that this is the latest version of this drawing, please contact one of the ERNI companies before using. | Subject to modification without prior notice. Drawing will not be updated. | Designation | |
| Consider protection memo from DIN 34 | | www.ERNI.com | Federleiste M 16-8 Löt Fem. Connector M 16-8 Solder | |
| Index | Date | H:00066517.SZA | 354239 | I |
| | | | STVM | |

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[ERNI Electronics:](#)

[354239](#)