


THIS DOCUMENT CONTAINS DATA PROPRIETARY TO PROJECTS UNLIMITED, INC. ANY USE OR REPRODUCTION, IN ANY FORM, WITHOUT PRIOR WRITTEN PERMISSION OF PROJECTS UNLIMITED, INC. IS PROHIBITED.
© 2005, Projects Unlimited Inc.

SPECIFICATIONS

PARAMETERS	VALUES	UNITS
DIRECTIVITY	OMNI	—
SENSITIVITY	-43 ± 3	dB
STANDARD OPERATING VOLTAGE	3	Vdc
MAX OPERATING VOLTAGE	10	Vdc
CURRENT CONSUMPTION (MAX)	0.25	mA
IMPEDANCE	2	kOhm
SIGNAL TO NOISE RATIO (MIN.)	60	dB
TERMINAL	LEAD WIRE	—
INTERNAL CAPACITOR	100	pF

REVISIONS

LTR	DESCRIPTION	DATE	APPROVED
—	RELEASED FROM ENGINEERING	4/29/11	
A	REVISED WIRE STRIP LENGTH	5/17/11	M.L.
B	REVISED AWG# & ADDED CAPACITOR	8/18/11	C.W.

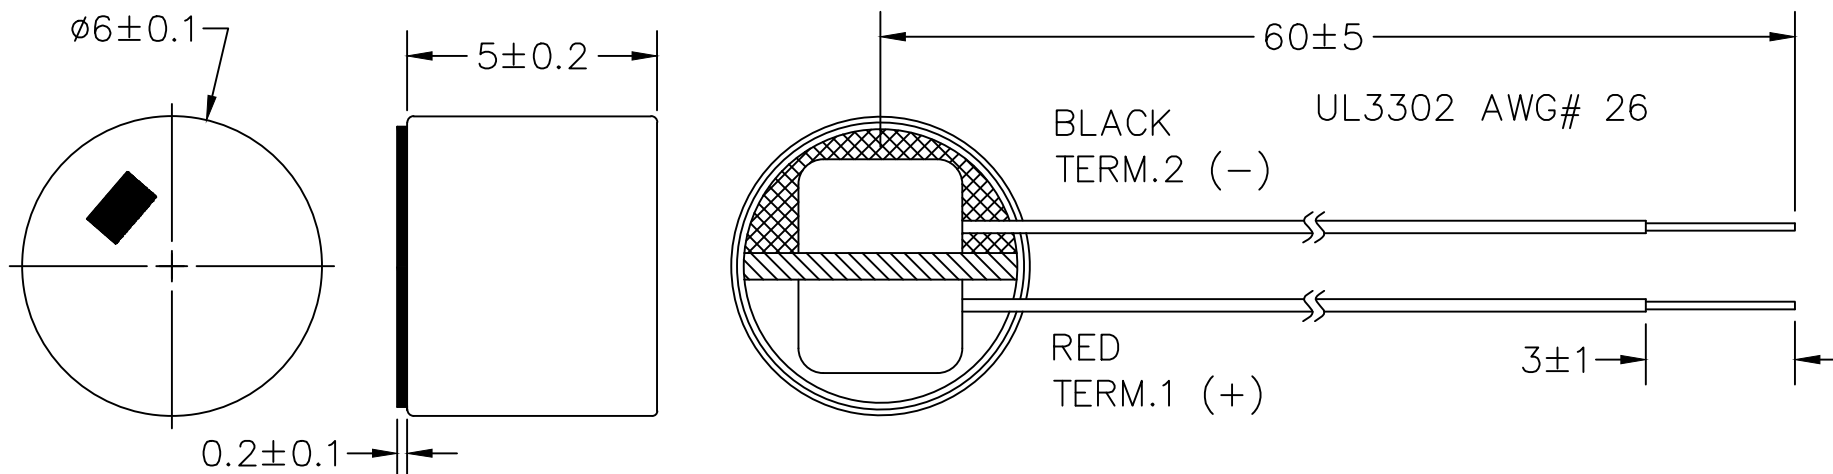

NOTES:

1. ALL DIMENSIONS ARE IN MILLIMETERS.
2. SPECIFICATION SUBJECT TO CHANGE OR WITHDRAWAL WITHOUT NOTICE.
3. THIS PART IS RoHS 2002/95/EC COMPLIANT.

FILE NAME
POM-5043L-LW60-R.DWG

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS, TOLERANCES ARE ± 0.5 AND ANGLES ARE $\pm 3^\circ$.		 3541 Stop Eight Road Dayton, Ohio 45414	
APPROVALS		DATE	
DRAWN	J.D.	4/11	
CHECKED	M.L.	4/11	
APPROVED	B.R.	4/11	
SIZE A		DRAWING NO. POM-5043L-LW60-R	
SCALE: N.T.S.		SHEET 1 OF 1	